


LED 2 inch Gimbal HO Trimless Round, White Finish, Selectable CCT (Luminaire)

ITEM	P-6160
DESCRIPTION	R2/12W/GR/LED/TL/5CCT
COLOR TEMP	27, 30, 35, 41, 50k
OUTPUT LUMEN	1000
BEAM ANGLE	40°
INPUT VOLTS	120V
WATTAGE	12W
EQUIV. WATTAGE	120W
CRI	>90
DIMMABLE	Yes
CUTOUT	2.94
OD	4.05
HEIGHT	2.50
mA	270mA
OUTPUT VOLTS	36V



- SOFT WHITE 2700K
- WARM WHITE 3000K
- NEUTRAL WHITE 3500K
- COOL WHITE 4100K
- SUPER WHITE 5000K

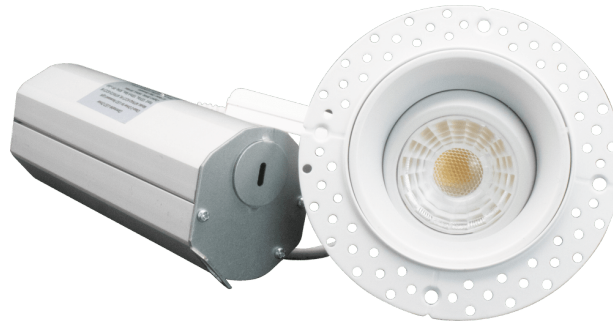


P-6160

Accessories








Emergency LED Driver
15W P-5262
30W P-5263



New Construction Plate
P-5265

Installation Guide

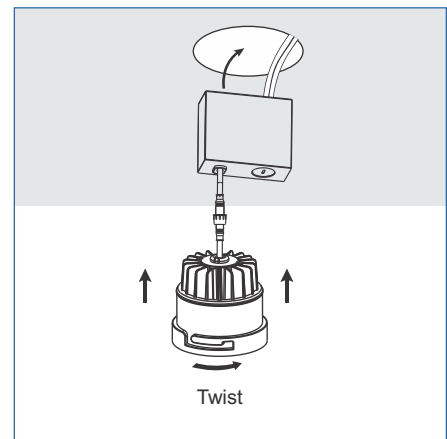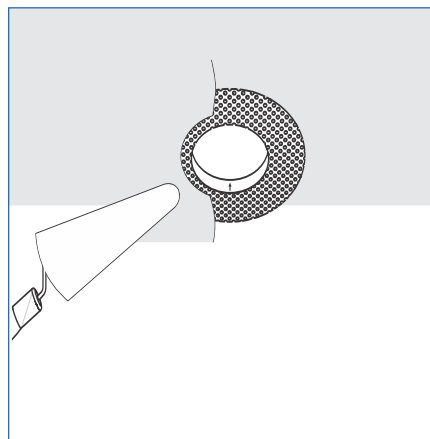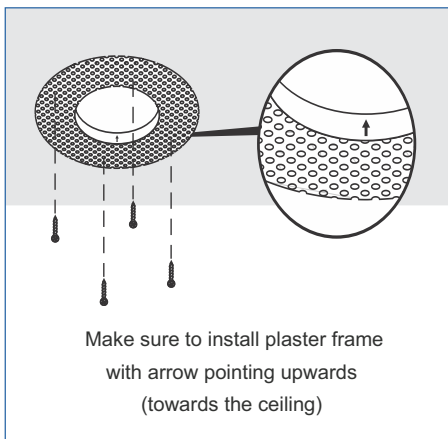

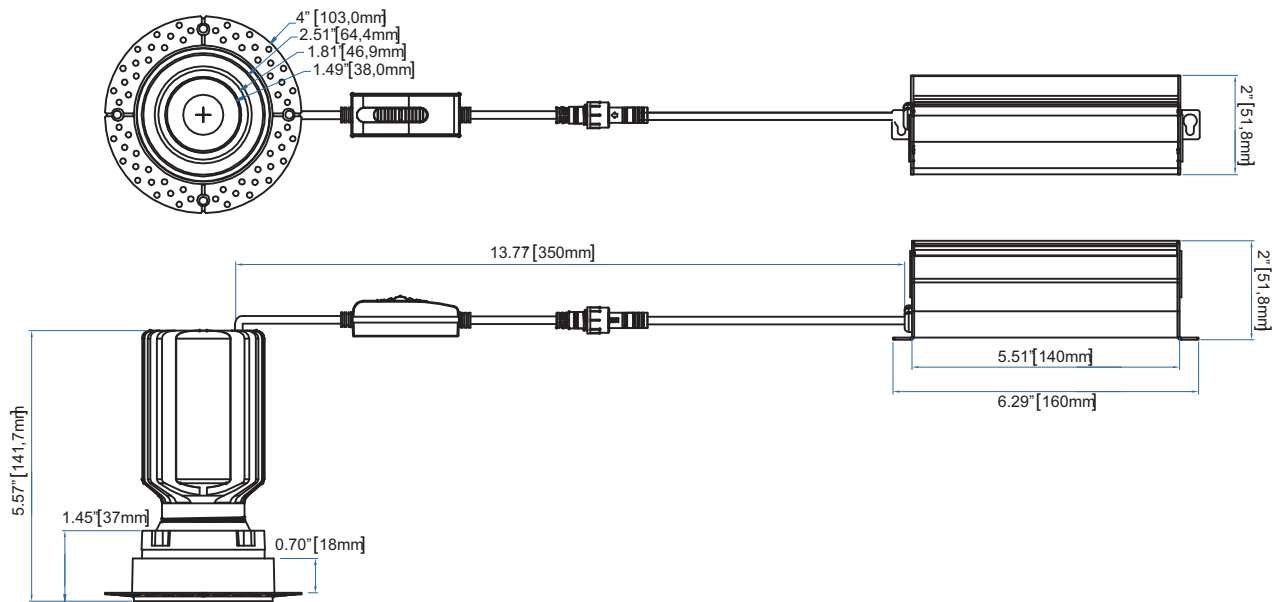

DimmerList

BRAND	SERIES	MODEL	LOAD	DIMMABILITY	BRAND	SERIES	MODEL	LOAD	DIMMABILITY
LUTRON	ARIADNI	AYCL-153P	150W	OK	LUTRON	TOGGLER	TG-600P	600W	OK
	DIVA	DV-600PR	600W	OK		TOGGLER	TGCL-153P	150W	OK
	DIVA	DVCL-153P	150W	OK		CASETA	WIRELESS DIMMER	150W	OK
	MAESTRO	MACL-153MH	600W	OK		SURESLIDE	6633	600W	OK
	MAESTRO WIRELESS	MRF2-6CL	150W	OK	LEVITON	SURESLIDE DECORA	6674	600W	20-100%
	ROTARY	D-600P	600W	OK		TRIMATRON	6602	600W	20-100%
	ELECTRONIC	NTELV-300P	600W	OK		ILLVMATECH	IPL06	600W	OK
	SKYLARK	S-600P	600W	OK	LEGRAND	ADORNE	ADTP703TU	700W	20-100%
	SKYLARK CONTOUR	CT-600P	600W	OK		HARMONY	H703PTW	700W	OK
	SKYLARK CONTOUR	CLCL-153P	153W	OK	COOPER	ASPIRE	9540	1000W	OK
						DEVINE	DAL06P	300W	OK