

24" DEEP DIRECT DRAW KEG REFRIGERATORS

EBD – Series • EBDS2-24 • EBD2-24 • EBD3-24 • EBD4-24



▲ EBDS2-24



▲ EBD2-24



▲ EBD3-24



▲ EBD4-24

Cabinet Construction

Heavy duty stainless steel countertop, with textured and laminated black vinyl exterior. Galvanized steel interior wall, and high quality stainless steel floor. 1 3/4" thick high density foamed-in-place polyurethane insulation. Built-in caster thread receptacles for all units.

Refrigeration System

- Side mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Lighting

- Shielded incandescent interior lighting with on/off switch

Doors

- Textured and laminated black exterior and galvanized steel interior
- 1 3/4" thick high density foamed-in-place polyurethane insulation
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles for a flat surface
- Door locks

Draft Arms

- NSF approved 3" diameter insulated stainless steel draft arm with air distributor
- Two draft arms

Temperature Control



- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat

Options

- 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)
- Dual faucet towers



Dimensions

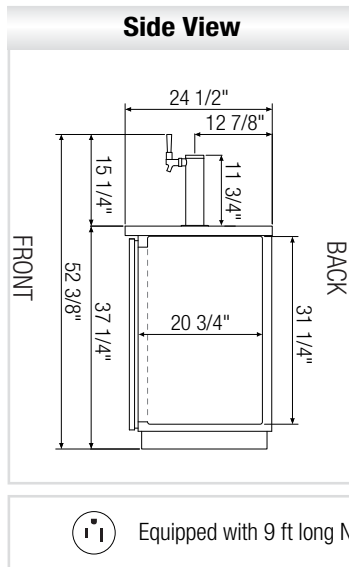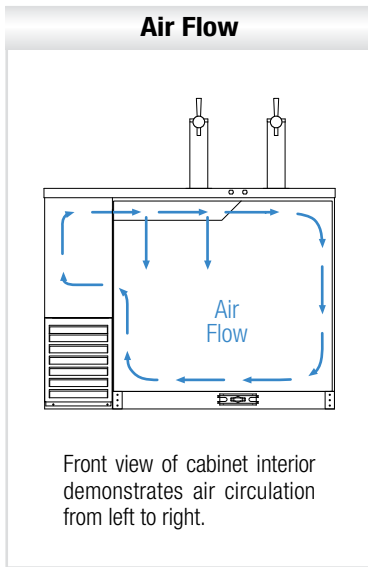


✓ : Drain


T-Shaped PVC Drain Fittings w/ Movable Plug.

It is required to use a hose attachment w/ 3/4" inner diameter.


ⓘ Equipped with 9 ft long NEMA 5-15P plug.

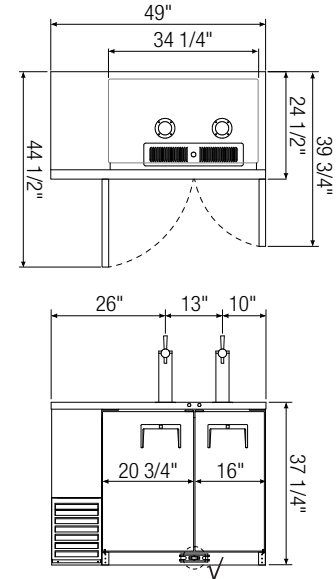


▲ EBDS2-24

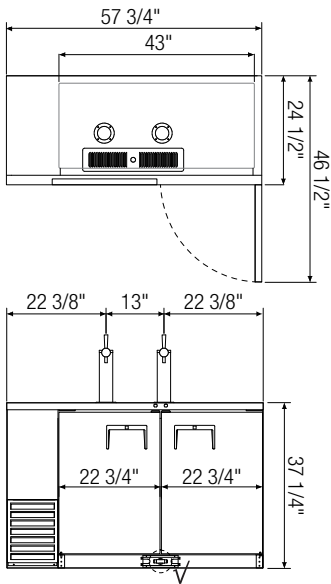

▲ EBD2-24

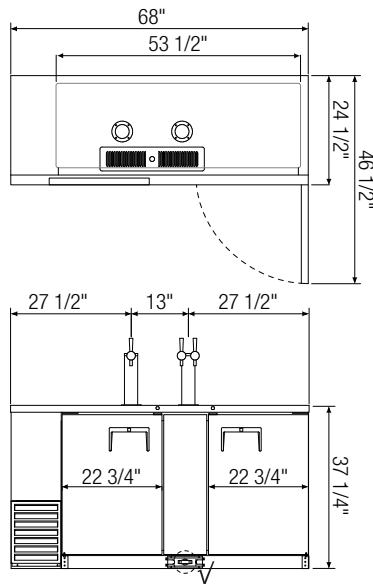

▲ EBD3-24

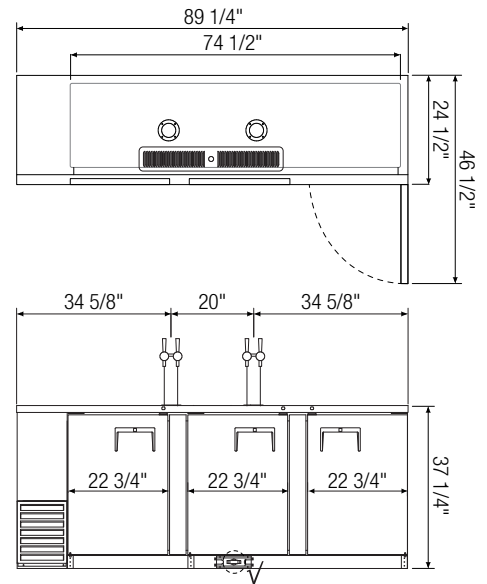

▲ EBD4-24

Model	Ref/ Frz/ Dual	# of Doors	Capacity & Size of Barrels	Capacity (Cu.Ft.)	HP	BTU/HR †	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
												L	D	H
EBDS2-24	Ref	2	(1) 1/2 (1) 1/4-Slim	13.95	1/4+	2,075	R-134A	1	115-60-1	4.50	250	49	24 1/2	37 1/4
EBD2-24	Ref	2	(2) 1/2	16.86	1/4+	2,075	R-134A	1	115-60-1	4.50	280	57 3/4	24 1/2	37 1/4
EBD3-24	Ref	2	(3) 1/2	20.41	1/4+	2,555	R-134A	1	115-60-1	4.50	297	68	24 1/2	37 1/4
EBD4-24	Ref	3	(4) 1/2	27.96	1/3	2,555	R-134A	1	115-60-1	4.50	380	89 1/4	24 1/2	37 1/4

† : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.