

BACK MOUNT SANDWICH PREP. TABLE

Back Mounted Condensing Unit

EPBN – Series

Model : EPBNR1



EVEREST REFRIGERATION
www.EVERESTref.com



 **Operating temperature range is 32°F ~ 42°F**



Please visit our website for updated Energy Efficiency information.

Option

- 2 1/2" diameter casters (3 1/2" overall height)

Model	# of Doors	Capacity [†] (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions		
										L	D	H*
EPBNR1	1	6.5	1/5	R-134A	1	1/6 x 8 ^a	115-60-1	4.10	216lbs (98kg)	27 3/4" (706 mm)	31 1/2" (800 mm)	37 1/2" (740 mm)

^a : Pan count applicable for units manufactured from April 2016

* : Height does not include 5" for casters

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity ([†]) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Cabinet Construction

Heavy duty stainless steel interior and exterior, galvanized steel finished bottom and back wall of exterior. High quality 16 gauge stainless steel worktop, top lid and hood. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Back mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Slide-out condensing unit for convenient repair and maintenance
- Front air breathing for built-in applications
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief port for rapid cabinet re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Door

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Rounded corners for a sleek and modern appearance
- Heavy duty adjustable torsion spring self-closing system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handle for a flat surface
- Model available in left hinge upon request

Preparation Area

- 1/2" thick foam insulated lids to prevent moisture build-up and heat exchange
- Removable and adjustable sanitary 12 1/4" deep cutting board
- Sanitary polycarbonate pans (Note: refer to the website for pan configurations)

Shelving

- One epoxy coated wire shelf
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat

BACK MOUNT SANDWICH PREP. TABLE

Back Mounted Condensing Unit

EPBN – Series

Model : EPBNR1



DIMENSIONAL DATA		
Net capacity cu. ft.		6.5 (184 cu l)
Exterior (mm)	Length Overall in.	27 3/4" (706)
	Depth Overall in.	31 1/2" (800)
	Height Overall in.*	37 1/2" (740)
Interior (mm)	Length Overall in.	23 5/8" (600)
	Depth Overall in. Da	26 3/4" (680)
	Depth Overall in. Db	17 1/8" (435)
	Height Overall in. Ha	22" (560)
	Height Overall in. Hb	15 3/8" (390)
Crated Weight		216lbs (98kg)
# of Doors		1
# of Shelves		1
# of Top Pans		1/6 x 8 ^a (6" Deep)
Shelf Size Length x Depth in. (mm)		22 5/8" x 14 3/4" (575 x 375)
ELECTRICAL DATA		
Voltage (V-Hz-Ph)		115-60-1
Full load amperes		4.10
Feed wires with Ground		3
Cord Length ft.		9
REFRIGERATION DATA		
Refrigerant		R-134A
Compressor H.P.		1/5 HP
BTU/HR† (Kcal/h)		1741(439)

Specifications subject to change without notice.

*: Height does not include 5" for casters.

Da: Interior Depth (top level).

Db: Interior Depth (bottom level).

Ha: Interior Height (floor to ceiling).

Hb: Interior Height (floor to evaporator cover).

^a: Pan count applicable for units manufactured from April 2016


†: Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).




Equipped with one NEMA 5-15P plug.

Dimensions inches (mm)

Top View

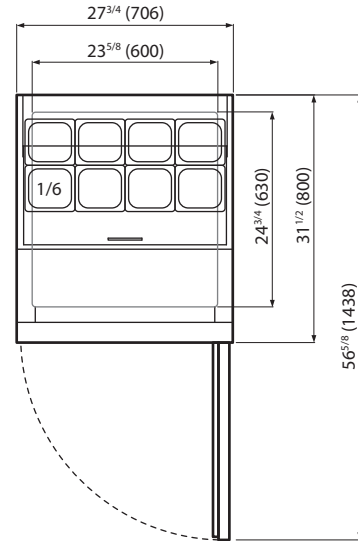

Front View

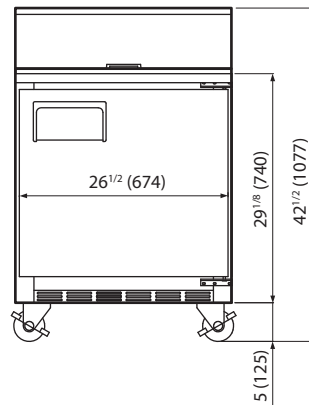

Side View

