

MODEL: D55R-GS2

Features and Benefits

- * Higher Resistance to Dust , high quality condenser
- * R290 Natural Refrigerant, promotes faster cool down and efficient energy consumption
- * 3-year parts and labor, 5-year compressor warranty
- * Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning
- * Self-closing doors with stay open feature.
- * Adjustable, heavy duty shelves

Technical Specifications

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel
Net Weight	463 lbs
Total Capacity	40.74 cu ft
Total Current	8.6A
Climatic Category	4/5
Nema Config.	5-15P



MODEL NO	TEMPERATURE RANGE (°F)	EXTERNAL DIMENSION WXDXH(INCHES)	PACKING,CARTON WXDXH(INCHES)	DOOR	40GP CONTAINER CERTIFICATION
D55R-GS2	33°F ~ 41°F	55½" X 32½" X 80½"	56¾" X 34¼" X 84½"	2	21

BOTTOM-MOUNTED REACH-IN REFRIGERATOR

MODEL: D55R-GS2

Model:	D55R-GS2
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	730W
Total Current:	8.6A
Total Capacity:	40.74 cu ft
Refrigerant:	R290/4.58oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	463 lbs
NEMA Config	5-15P

STANDARD FEATURES

BOTTOM MOUNT COMPRESSOR

The bottom mount compressor structure is placed in the coolest possible area, provides quick and easy service R-Series

HIGH QUALITY STEEL

Interior and exterior high quality steel minimizes dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVEING

High quality coated stainless shelves may prevent peel and rust.

SELF-CLOSING DOOR SYSTEM

Door Automatically close at 60°


REFRIGERATORS HOLDS 33 °F - 41 °F FOR BEST IN REFRIGERATORS



NEMA 5-15P
115/60/1

PLAN VIEW

FRONT VIEW

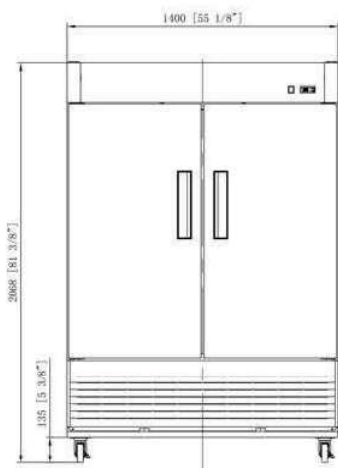

SIDE VIEW

