

Standard Features

- Powerful 2 HP custom built motor
- Three fixed speeds
- · High torque transmission
- Heat-treated hardened steel alloy gears and shafts
- Permanently lubricated transmission
- Thermal overload protection
- Rigid cast iron body
- Removable stainless steel bowl guard with built in ingredient chute
- NSF approved enamel gray paint
- · Front mounted controls
- 15 minute timer
- Industry standard #12 attachment hub
- · Safety interlocked bowl guard and bowl lift
- Non-slip rubber feet
- 6 foot cord and ground plug (single phase only)

Standard Accessories

- 40 quart stainless steel bowl
- Flat beater (aluminum)
- · Stainless steel wire whip
- Spiral dough hook (aluminum)



Model

□ SP40 - 40 Quart Mixer

Built into each mixer is the quality of workmanship and design synonymous with Globe.





Optional Attachments/Accessories

- ☐ Slicer/shredder/grater for #12 hub
- Meat grinder for #12 hub
- 20 quart adapter kit

Standard Warranty

· Two-years parts and one-year labor

Featuring a Removable Bowl Guard



- High-quality stainless steel removable bowl guard
- Interlocking guard easy to attach and remove for easy cleaning
- Dish machine safe

Approvea By:	
•	
Date:	



GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd. Dayton, OH 45439 Phone: 937-299-5493 Phone: 800-347-5423 Fax: 937-299-4147 SP40

Motor: 2 HP, grease packed ball bearing, air cooled, 220/60/1, 17 amps or 208/60/3, 8 amps. Thermal overload protection (automatic reset).

Finish: NSF approved enamel gray paint.

Capacity: 42 quart (40 liter) bowl.

Transmission: Fixed speed transmission is made of heat treated, hardened alloy, precision milled gears that operate the planetary action and provide high torque mixing power. The gears are packed in a long lasting grease, and all shafts are mounted in ball bearings.

Removable Bowl Guard:

Removable stainless steel bowl guard made of high-quality stainless steel. Interlocking guard is easy to attach and remove for easy cleaning in a sink or dishwasher. When guard is open or not properly installed, the mixer will not operate.

Safety Interlocks: The bowl guard and bowl lift lever are interlocked. The mixer will automatically shut down when the guard is opened or the bowl is lowered.

Agitator Speeds (RPMs):

Low	74
Intermediate	132
High	272

Specifications

Attachment Speeds (RPMs):

Low 52 Intermediate 92 High 190

Standard Equipment: Standard equipment includes a 40 quart #304 series stainless steel bowl, spiral dough hook, stainless steel wire whip, flat beater, removable stainless steel bowl guard with built in ingredient chute, 15 minute timer, and #12 attachment hub. A sturdy hand lever on the body column raises and lowers the bowl as well as locking in place at the top and bottom positions.

Cord: The single phase has a three wire cord and ground plug (6-20P). The three phase is hard wired.

Dimensions:

Foot Print = 25.0" x 24.5" (63.5 cm x 62.2 cm) Overall Length = 28.4" (72.1 cm)

Overall Length = 28.4" (72.1 cm) Overall Width = 25.0" (63.5 cm) Overall Height = 51.0" (129.5 cm)

Shipping Information:

Freight Class: 85 Net Weight: 550 lbs. (250 kg) Shipping Weight: 750 lbs. (340.2 kg)

Shipping Dimensions: 48"W x 48"D x 65"H

(121.9cm W x 121.9cm D x 165.1cm H)
Cartons are affixed to a skid
(pallet). The weight and dimensions
of this skid are included above and
may vary from shipment to shipment.

Optional Accessories: XXACC20-40 Adapter k

XXACC20-40 Adapter Kit includes a 20 quart bowl, wire whip, dough hook, flat beater, and bowl adapter to adapt 40 quart mixer to a 20 quart capacity.

Optional Attachments:

XMCA-SS Meat Grinder Assembly (Polished stainless steel cylinder, worm gear, ring, and pan. Includes knife, 3/16" plate, stainless steel pan, and pusher.)

Chopper Plate Sizes Available:

CP02-12	1/16"	(2mm)	
CP04-12	5/32"	(4mm)	
CP05-12	3/16"	(5mm)	
CP06-12	1/4"	(6mm)	
CP08-12	5/16"	(8mm)	
CP10-12	3/8"	(10mm)	
CP12-12	1/2"	(12mm)	
CP14-12	9/16"	(14mm)	
CP16-12	5/8"	(16mm)	
CP18-12	11/16"	(18mm)	
CP00-12	Stuffing	Plate	
XST12 1/2" stuffing tube (sheep)			
XST34 3/4" stuffing tube (hog)			


XVSGH 9" Slicer/Shredder/Grater Housing Only (no plates includedmust select from plates below)

XASP Adjustable slicing plate

XPH Plate holder - *only 1 required

Shredding/Grating Plates:

XSP332*	3/32"	(2.3mm)
XSP316*	3/16"	(4.7mm)
XSP14*	1/4"	(6.3mm)
XSP516*	5/16"	(7.9mm)
XSP12*	1/2"	(12.7mm)
XGP*	Grating plate	

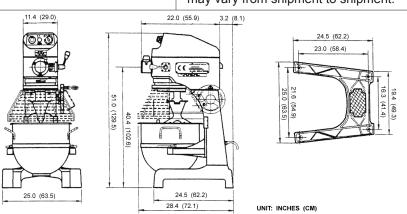



GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd. Dayton, OH 45439 Phone: 937-299-5493 Phone: 800-347-5423 Fax: 937-299-4147