

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Pro	inct	
FIU		

Model #: Item # :

Qty :

Slim Line

Glass Side Panel

Available W/H :

```
Approval :
```

# Horizontal Open Display Cases

### **NO PLUMBING REQUIRED**

## Model : TOM-30S(B) / TOM-30S-SP(-A)



#### LED lighting interior display system

Brighter and longer lasting LED lights provide attractive, enhanced illumination compared to fluorescents. It saves energy by producing less heat, while maximizing the visibility in the display area.

Solid side panels used to ensure durability (TOM-S-SP-A models)

#### Interior materials available in two standards (TOM-S-SP-A models)

Stainless steel interior for sanitary purposes or black coated interior with mirrored sides for maximized display effects.

- Designed to enhance impulsive sales Ideal for eye-catching displays and convenient access with fast service in high traffic area.
- Environmentally friendly, efficient refrigeration system

Turbo Air's refrigerators are designed with oversized and balanced environmentally friendly R-134A (CFC Free) refrigeration. These include

- 300 series stainless steel interior standard including back wall, shelves and deck pans
- Perforated interior back wall and top for improved air flow
- Foamed with polyurethane, high-density cell insulation (CFC free)
- Front air intake and rear air discharge
- Stainless steel front panel available for all model (optional)
- Recommended operating conditions TOM models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product.

large evaporators and condensers temperature throughout the cabine		ng and balanced			C C C C C C C C C C C C C C C C C C C	s Compressor S YEAR Intertek
Model	CU./FT.	# of Bottom Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H (inches)
TOM-30S(B) TOM-30SB-SP(-A)	4.6	3	1/3	7.5	338	28 x 345/8 x 411/2

\* For the 'Stainless Steel Front (SF)' option, please allow 8-10 weeks lead time for shipping.

# Horizontal Open Display Cases

28 (711mm)

FRONT VIEW

28 (711mm)

TRACK

Turbo air

8

(unit : inch)

**PLAN VIEW** 


## Model: TOM-30S(B) / TOM-30S-SP(-A)

ELECTRICAL DATA				
Voltage	115/60/1			
Plug Type	NEMA 5-15P			
Full Load Amperes	7.5			
Compressor HP	1/3			
Refrigerant	R-134A			
DIMENSIONAL DATA				
Net Capacity cu. ft.	4.6			
Ext. Length Overall in.	28 (711mm)			
Ext. Depth Overall in.	345/8 (880mm)			
Ext. Height Overall in.	411/2 (1054mm)			
Int. Length Overall in.	251/2 (648mm)			
Int. Depth Overall in.	24 (610mm)			
Int. Height Overall in.	13 (330mm)			
Net Weight Ibs.	255			
Gross Weight Ibs.	338			
# of Bottom Shelves	3			
Self Size (Top)	251/2 x 7 x 21/2			
Self Size (Middle)	251/2 x 141/8 x 31/4			
Self Size (Low)	251/2 x 93/4 x 3/4			

Design and specifications subject to change without notice. Actual shipping weight may differ due to extra packing materials for product protection.

### WARRANTY: 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

- Top display dry cases (TOMD-H) available in all sizes (optional)
- Simple plug-in installation
- Patented self-contained system, no plumbing required

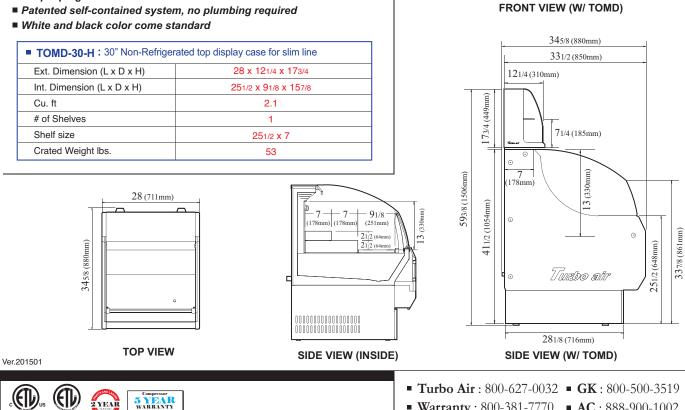

GREEN WORLD Turbo air

■ Warranty: 800-381-7770 ■ AC: 888-900-1002



(GERMAN

KNIFE

Intertek

Interte