




CATREXKIT-CL

INSTALLATION INSTRUCTIONS

Field Installable Rex switch for Command Access CL1 Series Cylindrical Lock. This switch is SPDT (single pull, double throw).

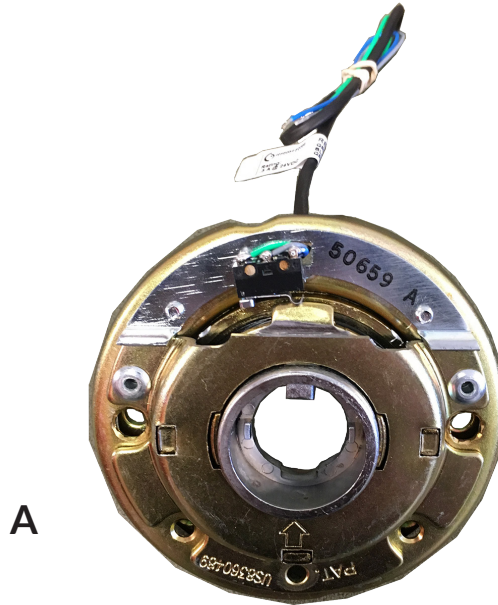

KIT INCLUDES

- A. Inside Spring Cage w/ REX

TOOLS REQUIRED

- None

SPECIFICATIONS

Rating: .25A@ 24VAC/DC

Configuration: Green - Common (C)
Blue - Normally Open (NO)
Grey - Normally Closed (NC)

- Remove lock from door.
- Replace inside spring cage with Rex spring cage.
- Make sure wires are coming out to the inner part of door.
- Assemble spring cage, rose, collar and handle onto chassis.
- Make sure not to over tighten.
- Re-install lock onto door and check for proper operation.

