

600-lb Electromagnetic Locks

E-941SA-600 UL Listed (294, 864, 1034, 10C*)

E-941SA-600PQ with bond sensor, status LED UL listed (10C†)

Features:

- 600-lb Holding force
- UL 10C, USA and Canada, UL 294 (Access Control System Units), UL 1034 (Burglary-Resistant Electric Lock Mechanism), and UL 864 (Fire Alarm Systems), USA
- Anodized aluminum housing (US 28)
- 12/24VDC selectable
- MOV surge protection.
- Adjustable mounting bracket.
- Complete mounting hardware for typical installations.
- "L" bracket and "Z" brackets available for easy mounting.
- Detachable faceplate
- Lifetime Limited Warranty



Identification of: NFPA Standards 70 and 72




E-941SA-600 shown

E-941SA-600PQ

- Built-in dual-colored status LED and bond sensor to indicate locking status

Green	Door is closed and locked
Red	Door is not closed and/or locked
Off	Door in use / No power

- Bond sensor relay rated 3A@12VDC




Specifications:

Model	E-941SA-600	E-941SA-600PQ
Holding force	600-lb (272kg)	
Operating voltage	12/24 VDC±10%	
Current draw	12VDC	500mA@12VDC
	24VDC	250mA@24VDC
Operating temperature	14°~131° F (-10°~55° C)	
Weight	4-lb, 6-oz (2kg)	
Bond sensor relay		✓
Status LED		✓


*The E-941SA-600 is UL 294, UL 1034, UL 864, and UL 10C for the USA, and 10C for Canada.
 †The E-941SA-600PQ is UL 10C for the USA and Canada.

Dimensions:

Electromagnet

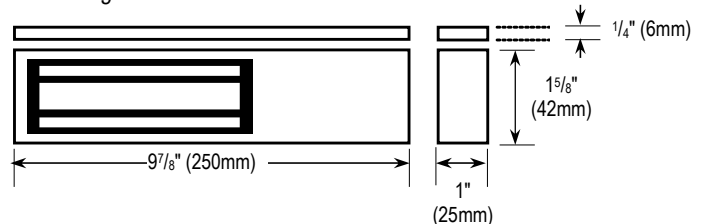

Armature Plate

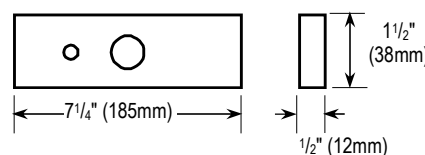

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2020 SECO-LARM U.S.A., Inc. All rights reserved.
 All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
 The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.
SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®