



Heavy Commercial, Grade 1





DC600 SERIES




Surface Applied, Size 1-4 Adjustable

HIGHLIGHTS

Best used for strength and durability for high volume area doors.

AREAS:

- Entry ways
- Passage ways
- Stairwell exits
- Restrooms

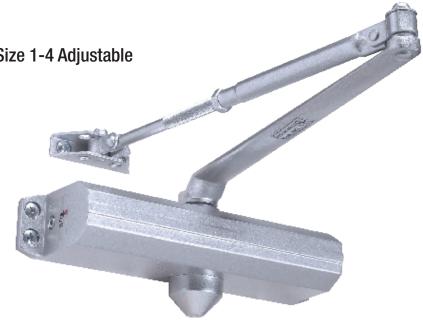





OTANDARD LEATONED	
Performance	Complies with ANSI A156.4, Grade 1, UL/ULC listed up to 3 hours fire rated, 2,000,000 cycles
Chassis	Cast aluminum
Handing	Non-handed
Mounting	Tri-Pack – regular, top jamb and parallel arm applications
Main Arm	Forged steel, accommodates reveals up to 3 1/4", adjustable extension arm
Spring Power	Adjustable sizes 1 – 4
Backcheck	Adjustable, hydraulic - providing cushioning and preventing uncontrolled openings of the door
Valves	Adjustable, independent, non-critical – sweep and latch, consistent closing speeds
Fasteners	Metal screws included for hollow metal and aluminum mounting applications, Wood screws included for wood door mounting applications, Thru-bolts optional
Door Range	Up to 180 degrees
Door Preparation	9-1/16" horizontal and 3/4" vertical mounting hole locations (retrofits traditional closer)
Warranty	Lifetime limited
OPTIONAL FEATURES	S
Cover	High impact plastic and plated kit: cover arm & bracket

Cover High impact plastic and plated kit: cover, arm & bracket **Hold Open Arm** Forged steel with hold open adjustable from 80 to 135 degrees **Sex Nuts** For 1-3/8" or 1-3/4" thick doors



[HEAVY-DUTY | GRADE 1 | 2,000,000 CYCLES | 3 HR - FIRE RATED | ADA COMPLIANT | LIFETIME LIMITED]

ITEM	DESCRIPTION
DC100018	12641 Grade 1 Heavy Duty Adjustable 1-4 – PA US28
DC100045	15641 Grade 1 Heavy Duty Adjustable 1-4 – Duro

COMPARABLE: Cal Royal 300 Series | Design 116 Series | Dorma 7400 | International 9000 | Norton 1601 | Norton 8501 | Sargent 1130 | Yale 3501 | Yale 51 Series