



## CC8WXXXA9

### Constant Current Driver

Model : CC8WXXXA9



| Model     | Output Current | Input Current | Input Power | Output Power Range | PF  | Efficiency | Output Voltage | No load Voltage |
|-----------|----------------|---------------|-------------|--------------------|-----|------------|----------------|-----------------|
| CC8W120A9 | 120mA          | 0.05A         | 7W          | 3.1-4.8W           | 0.9 | 78%        | 26-40V         | 55V             |
| CC8W150A9 | 150mA          | 0.05A         | 9W          | 3.9-6W             | 0.9 | 78%        | 26-40V         | 55V             |
| CC8W180A9 | 180mA          | 0.06A         | 10W         | 4.6-7.2W           | 0.9 | 82%        | 26-40V         | 55V             |
| CC8W200A9 | 200mA          | 0.06A         | 11W         | 5.2-8W             | 0.9 | 82%        | 26-40V         | 55V             |
| CC8W250A9 | 250mA          | 0.05A         | 8W          | 4.5-6.7W           | 0.9 | 80%        | 18-27V         | 40V             |
| CC8W300A9 | 300mA          | 0.06A         | 9W          | 5.4-8.1W           | 0.9 | 83%        | 18-27V         | 40V             |
| CC8W350A9 | 350mA          | 0.06A         | 10W         | 4.6-7.3W           | 0.9 | 80%        | 13-21V         | 35V             |
| CC8W450A9 | 450mA          | 0.06A         | 12W         | 5.8-8.5W           | 0.9 | 82%        | 13-19V         | 35V             |
| CC8W500A9 | 500mA          | 0.06A         | 13W         | 6.5-9.5W           | 0.9 | 82%        | 13-19V         | 35V             |

\* Test result @230V, 50Hz, Full Load.

### 1. Parameters


| Category   | Item                      | Technical Norm                                                                              |
|------------|---------------------------|---------------------------------------------------------------------------------------------|
| Features   | Output Type               | Constant Current                                                                            |
|            | IP Grade                  | IP44                                                                                        |
|            | Insulation Class          | Class II                                                                                    |
| Input      | Rated Input Voltage       | 220-240VAC                                                                                  |
|            | Range of Input Voltage    | 180-264VAC                                                                                  |
|            | Frequency                 | 50/60Hz                                                                                     |
|            | Input Current             | ≤0.06A                                                                                      |
|            | Input Power               | ≤ 13W (230VAC, full load)                                                                   |
|            | Power Factor              | ≥0.9(230VAC, full load)                                                                     |
|            | THD                       | ≤15%(230VAC, full load)                                                                     |
|            | No-load Power Consumption | ≤0.5W @230VAC                                                                               |
|            | Inrush Current            | ≤13A/350us (230VAC, Full-load)                                                              |
| Output     | Current Accuracy          | ±5%(450MA,500MA) ; ±6%(250MA, 300MA,350MA)<br>±7.5%(200MA); ±8%(150MA,180MA)<br>±10%(120MA) |
|            | Max. Output Power         | 9.5W                                                                                        |
|            | Started Delay Time        | ≤0.5S (230VAC, full load)                                                                   |
|            | Current Ripple            | ±5% (Imax-Imin) / (Imax+Imin)                                                               |
|            | PstLM                     | ≤1                                                                                          |
|            | SVM                       | ≤0.4                                                                                        |
| Protection | Short Circuit Protection  | Auto Recovery                                                                               |

|                                                                                                                                                                                                                                                                 |                          |                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                 | Overload Protection      | Auto Recovery                                                                                                                                     |
|                                                                                                                                                                                                                                                                 | No-load Protection       | Auto Recovery                                                                                                                                     |
| Protection                                                                                                                                                                                                                                                      | Insulation voltage       | I/P to O/P , 3.75KVac/1min                                                                                                                        |
|                                                                                                                                                                                                                                                                 | Insulation resistance    | >100M ohm @ 500VDC                                                                                                                                |
|                                                                                                                                                                                                                                                                 | Leakage current          | I/P to O/P < 0.7mA                                                                                                                                |
| Environment                                                                                                                                                                                                                                                     | Ta/Operation Temperature | -25....+50℃                                                                                                                                       |
|                                                                                                                                                                                                                                                                 | Ts/Storage Temperature   | -20....+80℃                                                                                                                                       |
|                                                                                                                                                                                                                                                                 | Tc/Enclosure Temperature | 80℃                                                                                                                                               |
|                                                                                                                                                                                                                                                                 | Humidity                 | 10%....90%RH                                                                                                                                      |
|                                                                                                                                                                                                                                                                 | Atmosphere               | 86-108KPa                                                                                                                                         |
| Construction                                                                                                                                                                                                                                                    | Connection Method        | Direct Lead                                                                                                                                       |
|                                                                                                                                                                                                                                                                 | Installation             | Built-in                                                                                                                                          |
|                                                                                                                                                                                                                                                                 | PRI Wire preparation     | 0.5-1.5 <sup>□</sup>                                                                                                                              |
|                                                                                                                                                                                                                                                                 | SEC Wire preparation     | 0.5-1.5 <sup>□</sup>                                                                                                                              |
|                                                                                                                                                                                                                                                                 | Dimension                | 48.2X30X20mm (L*W*H)                                                                                                                              |
| Standards                                                                                                                                                                                                                                                       | Certification            | CE/TUV/SAA/CCC/CB                                                                                                                                 |
|                                                                                                                                                                                                                                                                 | Safety Standards         | EN61347-2-13:2014/A1:2017<br>EN62384:2006/A1:2009<br>EN 61347-1:2015/A1:2021,AS61347.2.13:2018,<br>AS/NZS61347.1:2016 Inc A1                      |
|                                                                                                                                                                                                                                                                 | EMC Standards            | EN IEC 55015:2019,EN IEC 55015:2019/A11:2019,<br>EN IEC 61000-3-2:2019,EN 61000-3-<br>3:2013/A1:2019, EN61547:2009 ,EN IEC<br>55015:2019/A11:2020 |
|                                                                                                                                                                                                                                                                 | Performance              | EN62384                                                                                                                                           |
|                                                                                                                                                                                                                                                                 | Surge                    | L-N/1KV                                                                                                                                           |
|                                                                                                                                                                                                                                                                 |                          |                                                                                                                                                   |
| Others                                                                                                                                                                                                                                                          | RoHS                     | complied to 2011/65/EU                                                                                                                            |
|                                                                                                                                                                                                                                                                 | Life Time                | 50,000h @ Ta                                                                                                                                      |
|                                                                                                                                                                                                                                                                 | Warranty                 | 5years , F.R. < 10000ppm                                                                                                                          |
| <b>Remark</b><br>1. All Parameters, if not specified, are measured at 230VAC/50Hz and 25℃ ambient temperature.<br>2. LED Driver is a component of the luminaires ,Luminaires and wire layout will affect the EMC, please check the EMC with end products again. |                          |                                                                                                                                                   |



2. Connected quantities of different current Break


| TYPE   | Connected quantities of different current Break |        |        |        |      |      | Input Voltage | Inrush Current | Time  |
|--------|-------------------------------------------------|--------|--------|--------|------|------|---------------|----------------|-------|
|        | current (A)                                     | 10     | 13     | 16     | 20   | 25   |               |                |       |
|        | Installation wire diameter                      | 1.5mm² | 2.5mm² | 2.5mm² | 4mm² | 4mm² |               |                |       |
| TYPE B |                                                 | 40     | 52     | 64     | 80   | 100  | @230VAC       | 15             | 350us |
| TYPE C |                                                 | 64     | 83     | 102    | 128  | 160  |               |                |       |
| TYPE D |                                                 | 102    | 133    | 164    | 205  | 256  |               |                |       |

3. Label

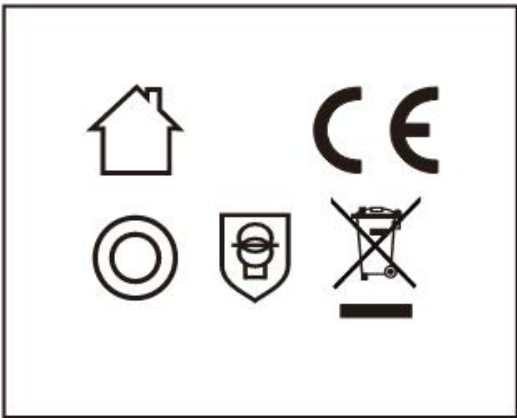


4. Electrical values

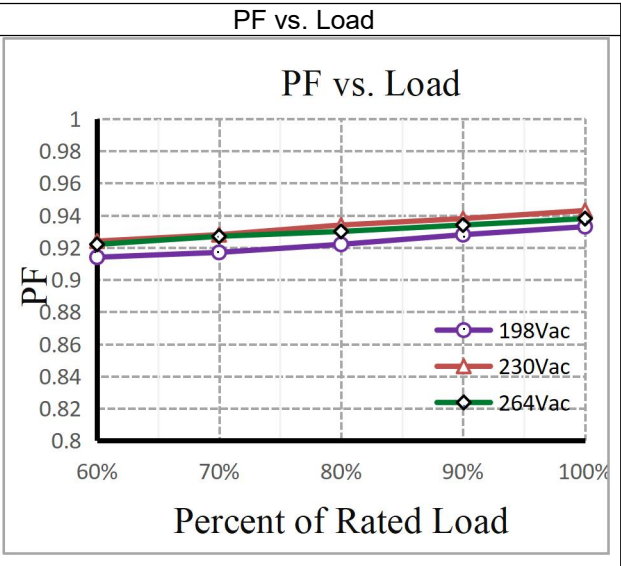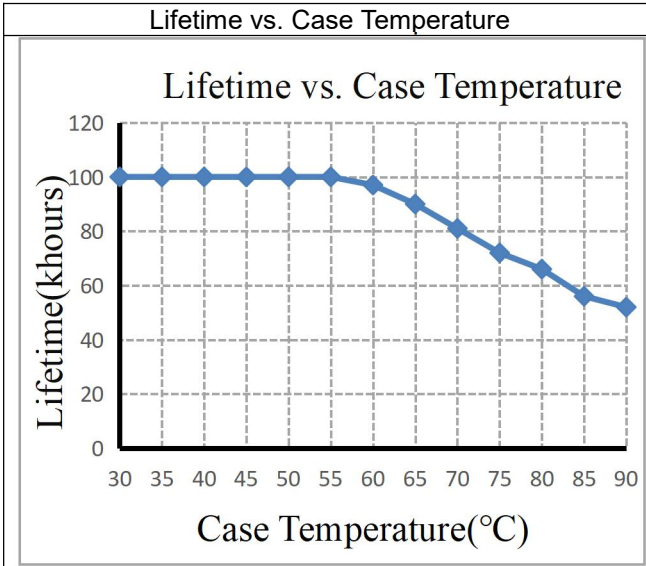

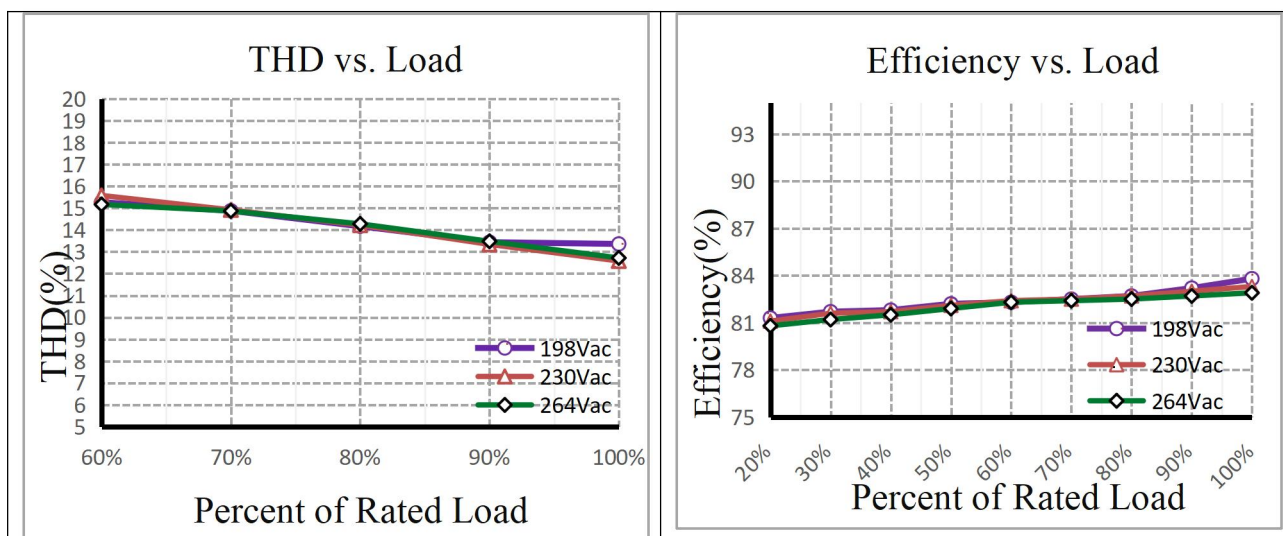


## 5. Dimension (Unit: mm)

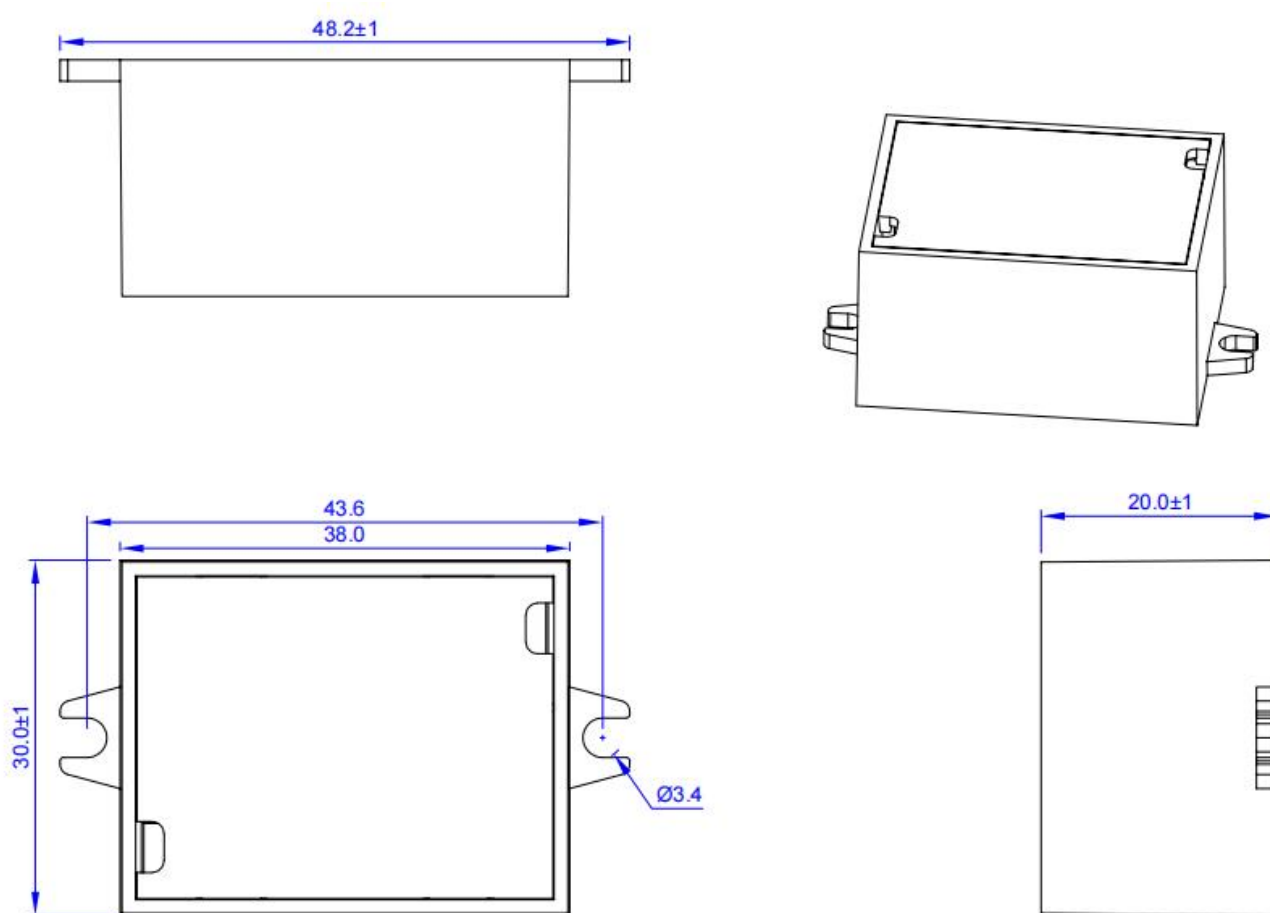

### 6. Packing information

| Packing way                     | Model     | Carton<br>L*W*H(mm) | Pcs/<br>Carton | Net<br>weight/<br>Pcs(kg) | Net<br>weight/<br>Carton(kg) | Gross<br>weight/<br>Carton(kg) |
|---------------------------------|-----------|---------------------|----------------|---------------------------|------------------------------|--------------------------------|
| Without white box<br>and manual | CC8WXXXA9 | 410*270*160         | 240            | 0.034                     | 8.16                         | 8.4                            |

### 7. Wiring Diagram

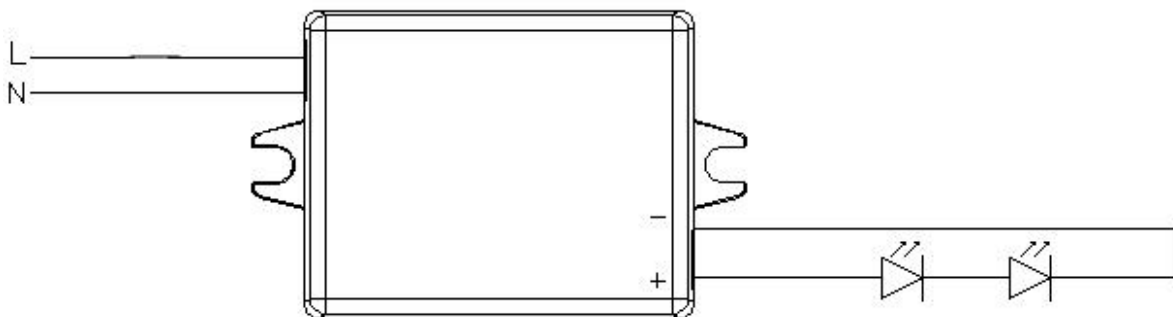

Wiring type and cross section

Length of exposed wire at input: Brown-blue wire,  $180\text{mm} \pm 5\%$ ,  $0.5\text{mm}^2$

Length of exposed wire at output: Red-black wire,  $175\text{mm} \pm 5\%$ ,  $0.3\text{mm}^2$

### 8. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)

### 9. REVISION HISTORY

| DATE      | VER  | REMARK                               |
|-----------|------|--------------------------------------|
| 2024-6-19 | V1.0 | Initial release.                     |
| 2025-4-16 | V1.1 | Updated labels to include IP44 logos |
| 2025-5-26 | V1.2 | Update inrush current parameters     |
|           |      |                                      |
|           |      |                                      |
|           |      |                                      |
|           |      |                                      |