

# SUKKAH ROOF ASSEMBLY INSTRUCTIONS

## STAGE 1


Once your sukkah is standing, place the L shaped bracket **inside** the upright poles of your sukkah.



*(If you have rubbers in the top of the pole remove them with pliers)*

## STAGE 2

Now insert the square long bars into the brackets with the protruding squares facing inwards.



Please note the width of the bars is adjustable. If necessary loosen the bolt & adjust to fit the width.

## STAGE 3

You will now place the arched bars on top of your sukkah. For all sizes except 2x2 you will need to first connect the two halves of the arched bars. Place the male side into the female side and press together firmly. As with the square bars, the arched bars are also adjustable. Adjust as necessary. Also place the roof material with the rings facing up on top of the sukkah and slide the corresponding rings through the arched bars.




Then place the corners of the arched bars into the corners of the cross bar.

## STAGE 4

On one end of the material you will find string. Unravel the string and pass one end through the nearest pulley and the other end over the roof material through the other pulley.

Now, attach the other end of the material to the square cross pole by pushing the last rings over the end of the arched poles.

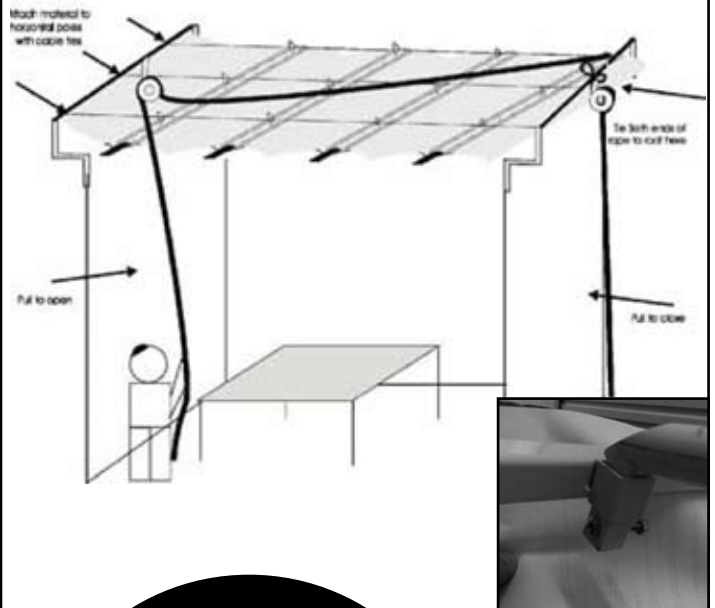

### PLEASE NOTE:

**This sukkah roof will make your sukkah top-heavy. Make sure your Sukkah is secured tightly to a wall or the ground and is protected from strong winds.**