


PARKING LOT LIGHT

LED-FL34A

PHOTOMETRIC

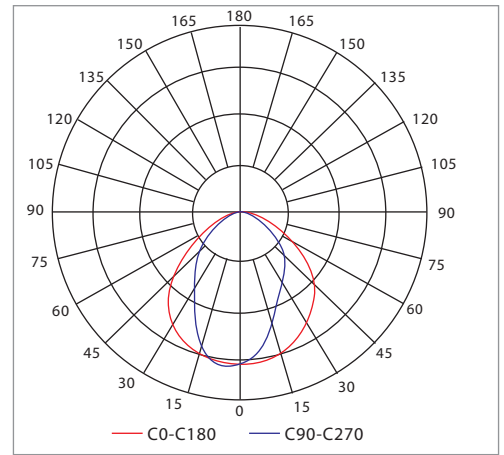


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT (W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE	REPLACE	DIMMING	CR I	POWER FACTOR	AVAILABLE CCT (K)
FL34A-150	120-277	153.1	118.5	18146.9	TYPEIII	400-600W HID	Available	>75	>0.92	4000 5000
FL34A-150	347-480	150	118	17700	TYPEIII	400-600W HID	Available			
FL34A-200	120-277	195.2	117.18	22873	TYPEIII	400-750W HID	Available			
FL34A-200	347-480	200	117	23400	TYPEIII	400-750W HID	Available			

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)

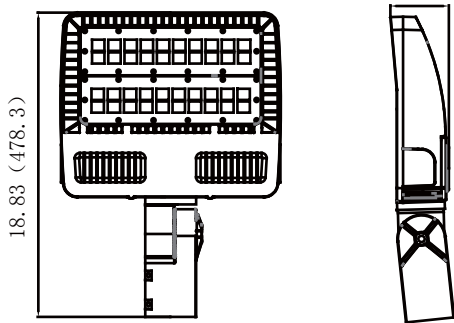


INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT (KG)	GROSS WEIGHT (KG)	CUBIC METER
FL34A-150	N/A	495*395*145	1	7.7	8.9	0.028
FL34A-200	N/A	495*395*145	1	7.8	9	0.028

OPTIONAL ACCESSORIES



10KV SPD
120-277V



PHOTOCELL WITH
RECEPTACLE
120-277V



BUTTON STYLE
PHOTOCELL
120-277V



DIMMABLE MOTION
SENSOR
120-277V