

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED LOC-##BLRD Bollard Family Series

CONSTRUCTION:

Polycarbonate lens and die-cast Aluminum housing. Bronze color.

OPTICAL SYSTEM:

2835 LED chips. Beam angle Type V.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input.

-30°C to 45°C, -22°F to 113°F

INSTALLATION & MOUNTING:

Anchor bolts.

CONTROLS & DIMMING:

0-10V dimming comes standard.
Photocell included.

FEATURES

- Default Wattages:
 - 24W
- Default CCT: 5,000K
- IP65 rated
- Surge Protection: L-N: 4KV
- IK10
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Pathways and walkways
- Area lighting
- Security
- Landscape
- Entryways
- Perimeter lighting

DLC Product ID:

- LOC-24BLRD-MW(12/18/24)MCCT(30/40/50) – S-JRQHKD
- LOC-42BLRD-MW(12/18/24)MCCT(30/40/50) – S-L0B7YR



SIZE	BUG RATING
24"	B1-U2-G1
42"	B1-U2-G1




LOC-24BLRD-MW(12/18/24)MCCT(30/40/50)								
WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
12W	3000K / 4000K / 5000K	1,450.8LM	120.9lm/W	120-277V	74	0.9	22.5%	
18W	3000K / 4000K / 5000K	2,176.2LM	120.9lm/W	120-277V	74	0.9	22.5%	
24W	3000K / 4000K / 5000K	2,901.6LM	120.9lm/W	120-277V	74	0.9	22.5%	


LOC-42BLRD-MW(12/18/24)MCCT(30/40/50)								
WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
12W	3000K / 4000K / 5000K	1,450.8LM	120.9lm/W	120-277V	74	0.9	22.5%	
18W	3000K / 4000K / 5000K	2,176.2LM	120.9lm/W	120-277V	74	0.9	22.5%	
24W	3000K / 4000K / 5000K	2,901.6LM	120.9lm/W	120-277V	74	0.9	22.5%	

MEASUREMENTS

LOC-24BLRD-MW(12/18/24)MCCT(30/40/50)

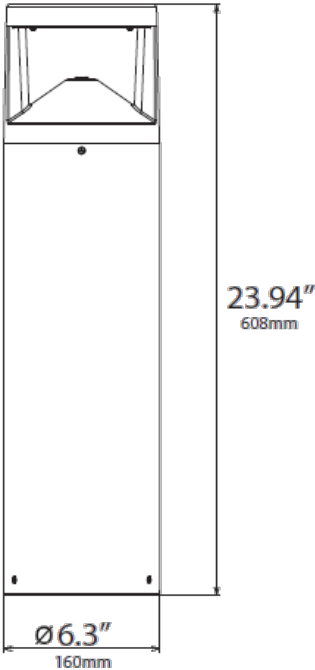

LOC-42BLRD-MW(12/18/24)MCCT(30/40/50)

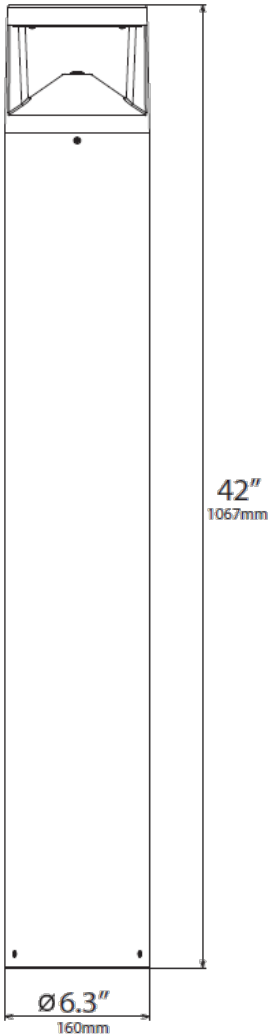

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-24BLRD-MW(12/18/24)MCCT(30/40/50)	1	9.3lbs	8.27" x 8.27" x 26.18"	12.43lbs	1	00810050947909
LOC-42BLRD-MW(12/18/24)MCCT(30/40/50)	1	13.49lbs	8.66" x 8.66" x 44.49"	16.6lbs	1	00810050947916

