

Date:	Location:
Product:	Project:
Quantity:	Catalog #:

## LED 5/6" 12W Multi CCT Down Light





#### **FEATURES**

- Default CCT: 5,000K
  - 2,700K / 3,000K / 3,500K / 4,000K / 5,000K
- Commercial grade
- IP rating of 20
- 50,000 hours lifetime

## **SUITABLE APPLICATIONS**

- Kitchens
- Bedrooms
- Bathrooms
- Corridors
- Hallways
- Museums

### **CONSTRUCTION:**

Downlight body and endcaps are both fabricated from aluminum for maximum rigidity. Spring clips for easy installation.

### **OPTICAL SYSTEM:**

Frosted lens. 120° beam angle

#### **WARRANTY:**

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

#### **ELECTRICAL:**

Uses a -20°C to 40°C case temperature drive. Available as 120V input.

## **INSTALLATION & MOUNTING:**

Use torsion spring clips to install in place.

## **DIMMING:**

Triac Dimming.







MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	REPLACES
LOC-56DL-12WMCCT(27/30/35/40/50)	12W	950LM	79.2LM/W	92	1.0	W

## **Energy Star ID:**


LOC-56DL-12WMCCT(27/30/35/40/50) - 2370228

## LED 5/6" 12W Multi CCT Down Light



Series	Size	Wattage Options	CCT Options	
LOC-56DL	5/6"	12W	2,700K	
			3,000K	
			3,500K	
			4,000K	
			5,000K	

# **MEASUREMENTS**

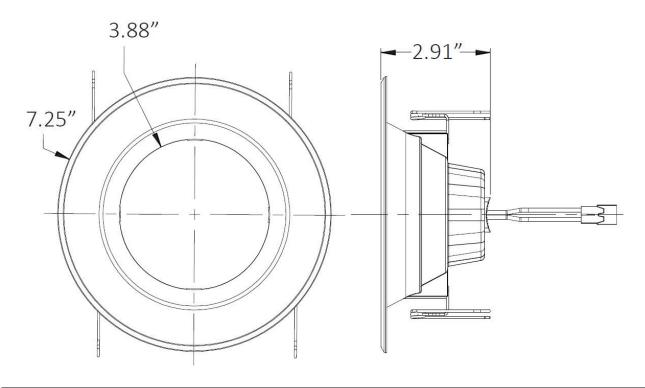

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-56DL-12WMCCT(27/30/35/40/50)	1	0.61 lbs	00810050940450