



LED LOC-CL-MWMCCT Corn Light Series

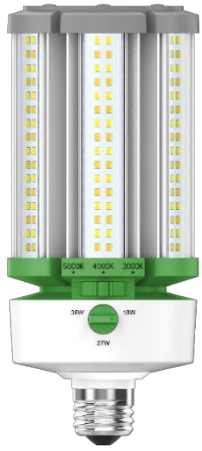

18W / 27W / 36W

E26 base

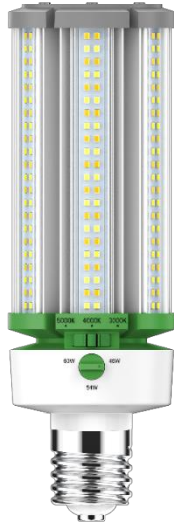

45W / 54W / 63W

E39 base



63W / 80W / 100W

E39 base

FEATURES

- Default Wattage is the highest wattage
 - 36W
 - 63W
 - 100W
- Default CCT: 5,000K
- IP42 rated
- No fans or moving parts providing increased reliability
- No lead or mercury
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Parking decks
- Auto dealerships
- High masts
- Housing complexes
- Shopping malls
- Parks and Recreational areas

CONSTRUCTION:

Extruded aluminum alloy to be more conductive to heat dissipation with PC cover. Temperature sensor.

OPTICAL SYSTEM:

Lumileds 2835 LED chips. 360° beam angle. High quality tempered glass optics.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 100-277V input. -40°C to 60°C, -40°F to 140°F

DIMMING:

Continuous dimming.

INSTALLATION & MOUNTING:

E39 screw in base. No ballast required. Suitable for enclosed fixtures.



MODEL NUMBER – 3,000K / 4,000K / 5,000K	BASE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-CL-MW(18/27/36)MCCT(30/40/50)D**	E26	18W	1,931.4LM	107.3LM/W	85	0.9	13.8%	150W HID
LOC-CL-MW(18/27/36)MCCT(30/40/50)D**	E26	27W	2,897.1LM	107.3LM/W	85	0.9	13.8%	150W HID
LOC-CL-MW(18/27/36)MCCT(30/40/50)D**	E26	36W	3,862.8LM	107.3LM/W	85	0.9	13.8%	150W HID

MODEL NUMBER – 3,000K / 4,000K / 5,000K	BASE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-CL-MW(45/54/63)MCCT(30/40/50)D	E39	45W	4,828.5LM	107.3LM/W	85	0.9	13.8%	250W HID
LOC-CL-MW(45/54/63)MCCT(30/40/50)D	E39	54W	5,794.2LM	107.3LM/W	85	0.9	13.8%	250W HID
LOC-CL-MW(45/54/63)MCCT(30/40/50)D	E39	63W	6,759.9LM	107.3LM/W	85	0.9	13.8%	250W HID

MODEL NUMBER – 3,000K / 4,000K / 5,000K	BASE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-CL-MW(63/80/100)MCCT(30/40/50)D	E39	63W	6,955.2LM	110.4LM/W	85	0.8	15.8%	600W HID
LOC-CL-MW(63/80/100)MCCT(30/40/50)D	E39	80W	8,832LM	110.4LM/W	85	0.8	15.8%	600W HID
LOC-CL-MW(63/80/100)MCCT(30/40/50)D	E39	100W	11,040LM	110.4LM/W	85	0.8	15.8%	600W HID


DLC Product ID:

- LOC-CL-MW(45/54/63)MCCT(30/40/50)D – PLUXFA2PUYJ
- LOC-CL-MW(63/80/100)MCCT(30/40/50)D – PLFVW8SMYH6A

NOTES: ** Not DLC listed

Series	Wattage Options	Wattage Options	Wattage Options	Color Temperature Options	Dimming
LOC-CL	18W 27W 36W	45W 54W 63W	60W 80W 100W	3000K 4000K 5000K	D = Continuous Dimming

MEASUREMENTS

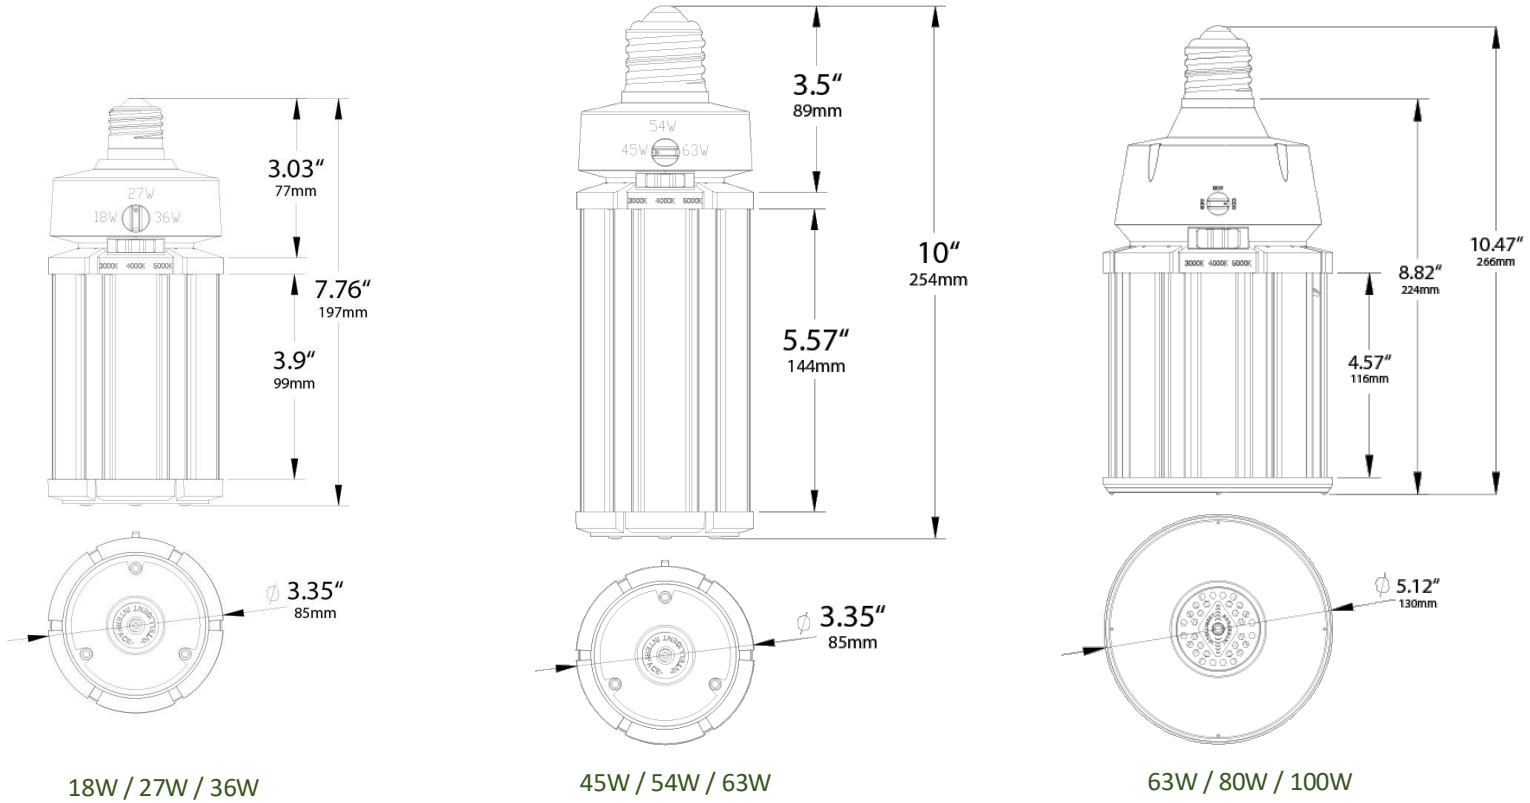


MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-CL-MW(18/27/36)MCCT(30/40/50)D	1	1.48lbs	00810050941501
LOC-CL-MW(45/54/63)MCCT(30/40/50)D	1	1.81lbs	00810050941518
LOC-CL-MW(63/80/100)MCCT(30/40/50)D	1	3.2 lbs	00810050941525

SELECTABLE COLOR TEMPERATURE OPTIONS



18W / 27W / 36W

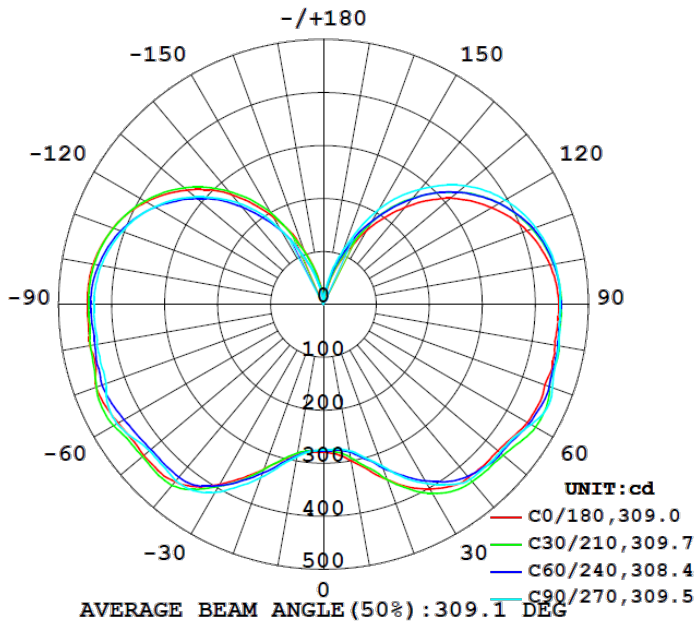


Flux out: 708.5 lm

Height	Eavg, Emax	Angle: 90.00deg	Diameter
1m	225.5, 293.5lx		200.00cm
2m	56.38, 73.39lx		400.00cm
3m	25.06, 32.62lx		600.00cm
4m	14.10, 18.35lx		800.00cm
5m	9.021, 11.74lx		1000.00cm
6m	6.265, 8.154lx		1200.00cm
7m	4.603, 5.991lx		1400.00cm
8m	3.524, 4.587lx		1600.00cm
9m	2.784, 3.624lx		1800.00cm
10m	2.255, 2.935lx		2000.00cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

45W / 54W / 63W

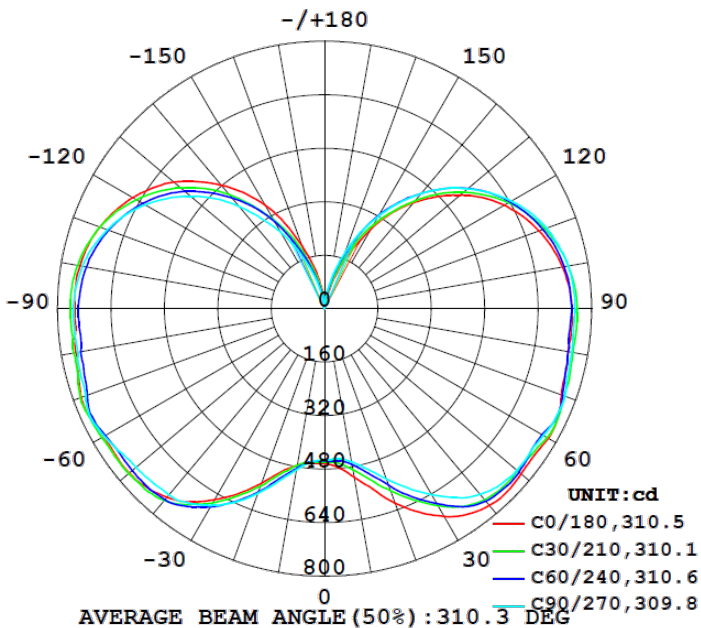


Flux out: 1205 lm

Height	Eavg, Emax	Angle: 90.00deg	Diameter
1m	383.7, 513.8lx		200.00cm
2m	95.92, 128.5lx		400.00cm
3m	42.63, 57.09lx		600.00cm
4m	23.98, 32.11lx		800.00cm
5m	15.35, 20.55lx		1000.00cm
6m	10.66, 14.27lx		1200.00cm
7m	7.830, 10.49lx		1400.00cm
8m	5.995, 8.028lx		1600.00cm
9m	4.737, 6.343lx		1800.00cm
10m	3.837, 5.138lx		2000.00cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

63W / 80W / 100W

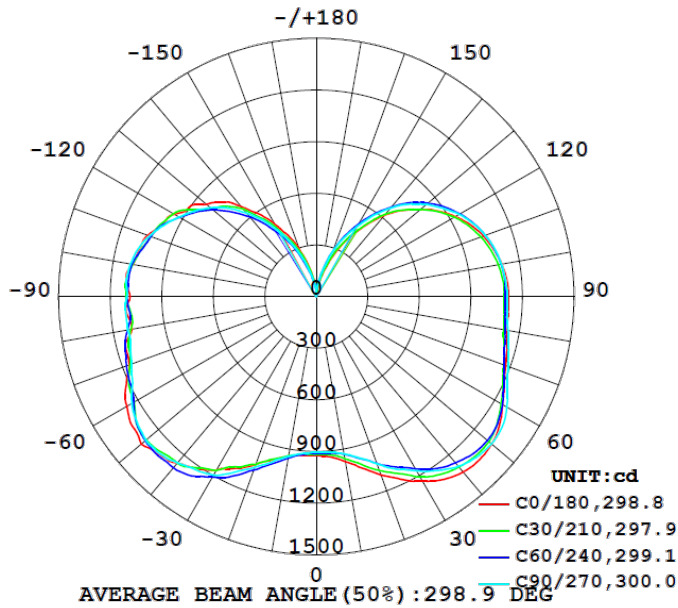

Flux out: 2139 lm

Height	Eavg, Emax	Angle: 90.00deg	Diameter
1m	680.8, 930.51x		200.00cm
2m	170.2, 232.61x		400.00cm
3m	75.65, 103.41x		600.00cm
4m	42.55, 58.161x		800.00cm
5m	27.23, 37.221x		1000.00cm
6m	18.91, 25.851x		1200.00cm
7m	13.89, 18.991x		1400.00cm
8m	10.64, 14.541x		1600.00cm
9m	8.405, 11.491x		1800.00cm
10m	6.808, 9.3051x		2000.00cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

OPTIONAL ACCESSORIES




LOC-L11-01
Daylight Sensor



LOC-L12-01
Microwave Sensor



LOC-L10-01
WiFi Smart Sensor



LOC-L07-01
3 in 1 Dimming

