

PRODUCT DESCRIPTION:

T8 linear tube retrofits are usually but not specifically used in commercial buildings such as hotels, conference rooms, schools, supermarkets, factory, parking garages, hospitals, airport, metro stations, bus stations, office buildings and any other sites where request long-time and hi-output lighting.

FEATURES:

- Double ended Type A
- Double ended Type B
- Input voltage is AC110V-277V
- Low thermal decay
- Low maintenance
- No mercury, lead-free
- No UV


26W 6FT Plug & Play Tube

LOD-6FT26W-40K


LOD-6FT26W-50K




Scenario 1: Magnetic Ballast Circuit

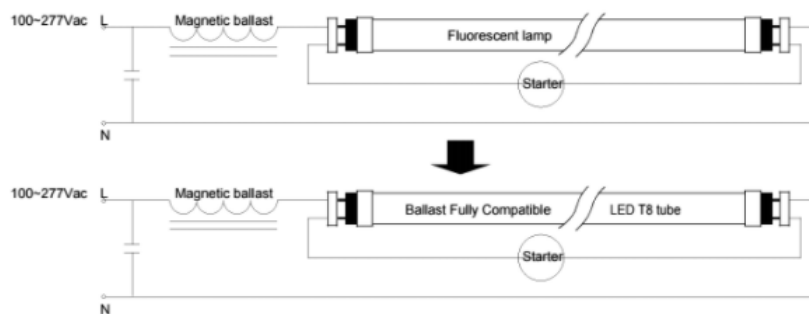

Scenario 2: Electronics Ballast Circuit

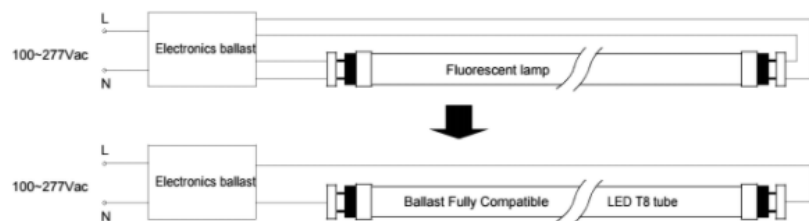

Scenario 3: By pass existing ballast in the circuit

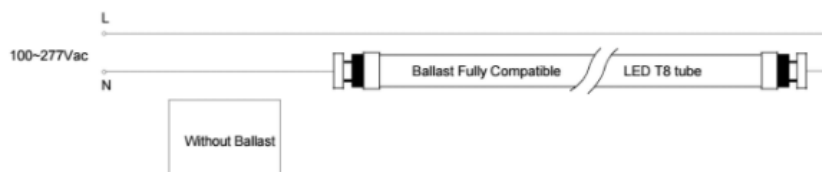

26W 6FT Plug & Play Tube

SPECIFICATIONS:

SPECIFICATION	Details	
Model	LOD-6FT26W-40K	LOD-6FT26W-50K
Input Wattage (W)	26W	
Lumens Delivered (LM)	2,600LM	2,860LM
Efficacy (LM/W)	100LM/W	110LM/W
CRI	82.1	83.1
Lifespan	50,000 hours	
Color Temperature	4,000K	5,000K
Wattage Equivalent	46W – 50W	
Dimmable	No	
IP Rating	IP40	
Beam Angle	120	
Input Voltage	AC110-277V	
Power Factor	0.95	0.95
Housing	Aluminum	
Lens	Frosted	
Mounting	G13	
Size	6FT	
THD		
Certification	UL	
Operating Temperature	-20°C to 50°C (-4°F to 122°F)	
Environment	Indoor	
Warranty	5 years limited	

