



## LED Multi Watt Multi CCT Tri-Proof Vapor Tight

### FEATURES

- Default Wattage:
  - 8FT – 100W
  - 4FT – 50W
  - 2FT – 30W
- Default CCT: 5,000K
- IP65 rated
- NSF rated for splash zone and nonfood zone
- UL 1598 suitable for wet location
- 50,000 hours lifetime

### SUITABLE APPLICATIONS

- Warehouses
- Factories
- Garage
- Parking lot

#### CONSTRUCTION:

PC housing and white cover.

#### OPTICAL SYSTEM:

Seoul 2835 LED chips. 110° beam angle.

#### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

#### ELECTRICAL:

120-277V input standard.  
-20°C to 40°C, -4°F to 104°F

#### INSTALLATION & MOUNTING:

Surface mount.

#### CONTROLS & DIMMING:

0-10V dimming.



MODEL NUMBER – 3,500K, 4,000K and 5,000K	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D	2FT	20W	2,264LM	113.2LM/W	80	0.9	20%	
LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D	2FT	25W	2,830LM	113.2LM/W	80	0.9	20%	
LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D	2FT	30W	3,396LM	113.2LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D	4FT	30W	3,429LM	114.3LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D	4FT	40W	4,572LM	114.3LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D	4FT	50W	5,715LM	114.3LM/W	80	0.9	20%	
LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D	8FT	60W	6,865.2LM	114.42LM/W	80	0.9	20%	
LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D	8FT	80W	9,153.6LM	114.42LM/W	80	0.9	20%	
LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D	8FT	100W	11,442LM	114.42LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D-MS	4FT	30W	3,429LM	114.3LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D-MS	4FT	40W	4,572LM	114.3LM/W	80	0.9	20%	
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D-MS	4FT	50W	5,715LM	114.3LM/W	80	0.9	20%	


#### DLC Product ID:

- LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D – S-4MR6EI
- LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D – S-RDA08F
- LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D – S-V4ZNI


Series	Size	2FT Wattage	4FT Wattage	8FT Wattage	Color Temperature	Dimming	Features
LOC-#FTTPVT	2FT = 2 foot 4FT = 4 foot 8FT = 8 foot	20W 25W 30W	30W 40W 50W	60W 80W 100W	3500K 4000K 5000K	D = Dimmable	MS = Motion Sensor

## MEASUREMENTS


2FT

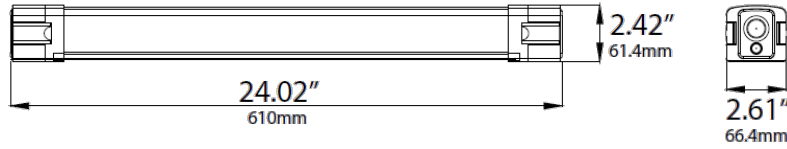

4FT

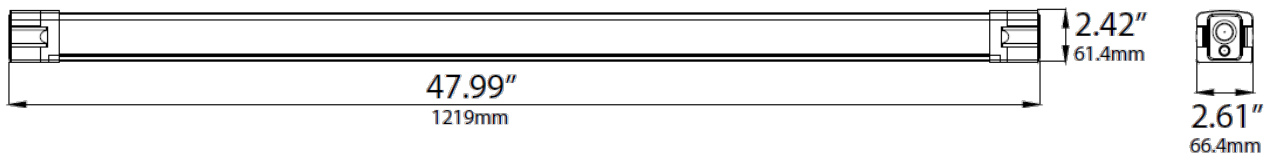

8FT

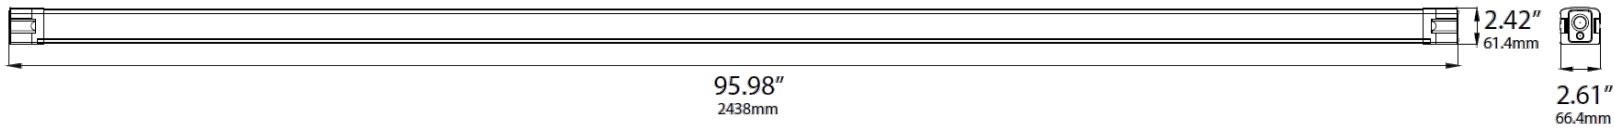

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-2FTTPVT-MW(20/25/30)MCCT(35/40/50)D	1	lbs	00810050942201
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D	1	lbs	00810050942218
LOC-8FTTPVT-MW(60/80/100)MCCT(35/40/50)D	1	lbs	00810050942225
LOC-4FTTPVT-MW(30/40/50)MCCT(35/40/50)D-MS	1	lbs	00810050942232

## OPTIONAL ACCESSORIES



Emergency Back-up




Sensor




## 2 FOOT


### 20W 3,500K

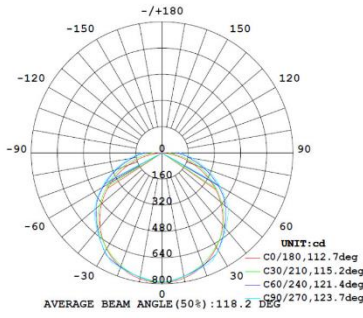

### 20W 4,000K

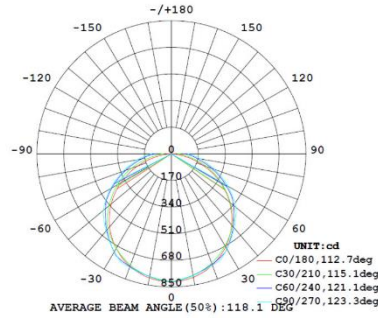


### 20W 5,000K

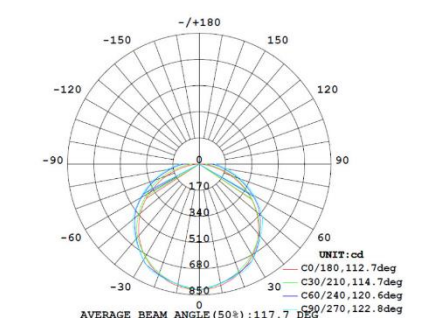


## 2 FOOT


### 25W 3,500K

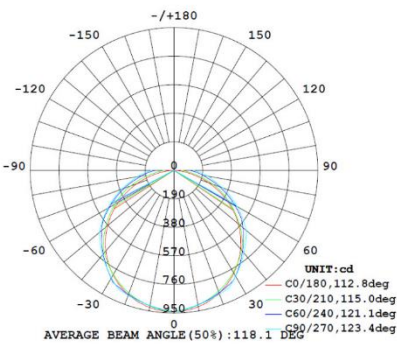

### 25W 4,000K

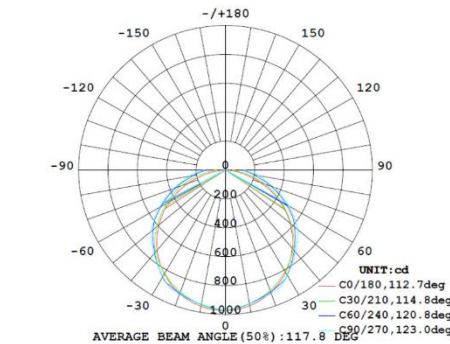


### 25W 5,000K

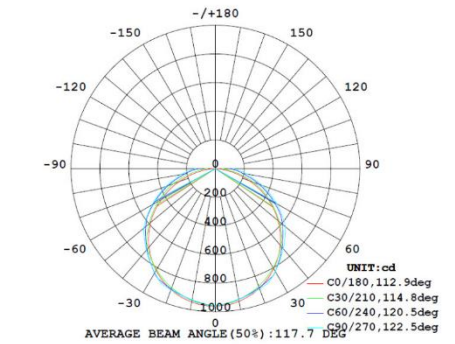


# PHOTOMETRIC

## 2 FOOT


30W 3,500K

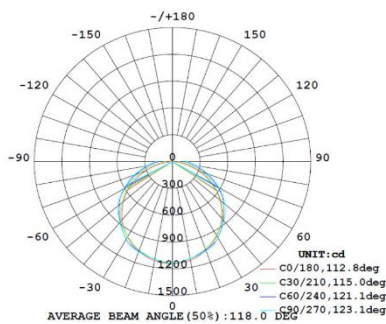

30W 4,000K

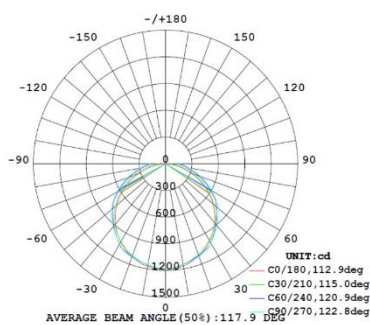


30W 5,000K

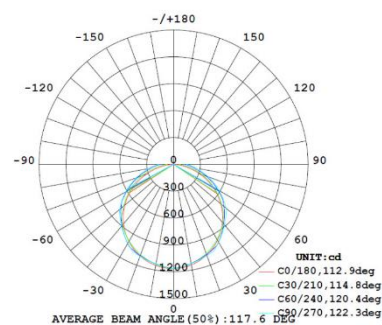


## 4 FOOT


30W 3,500K

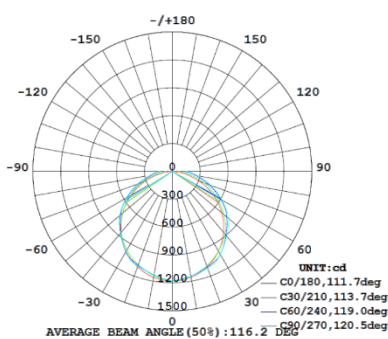

30W 4,000K

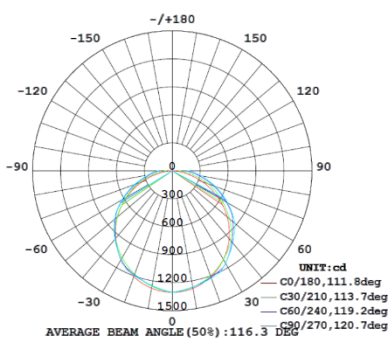

30W 5,000K

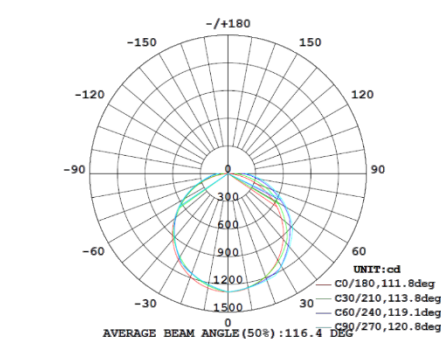





# PHOTOMETRIC

## 4 FOOT



40W 3,500K

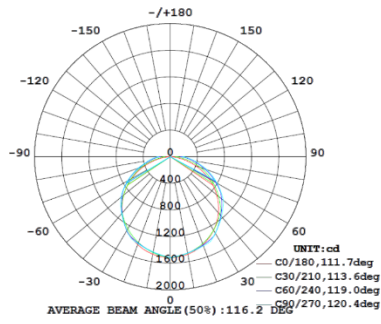


40W 4,000K

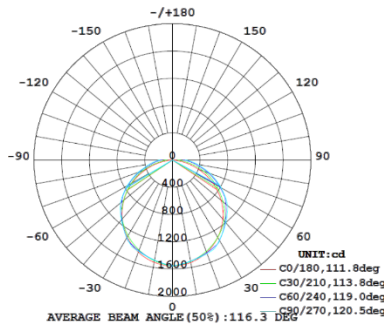


40W 5,000K

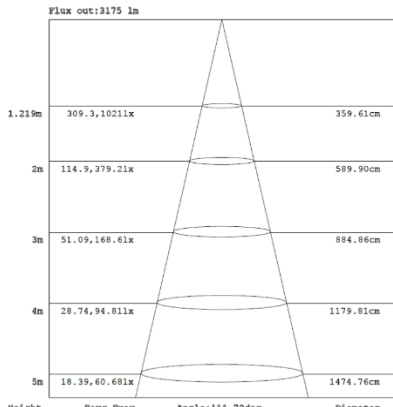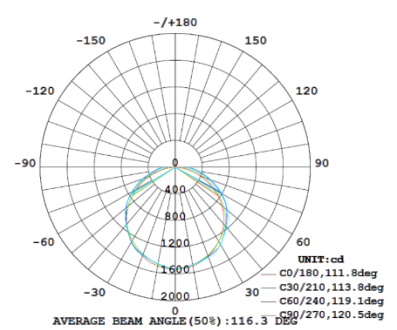

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

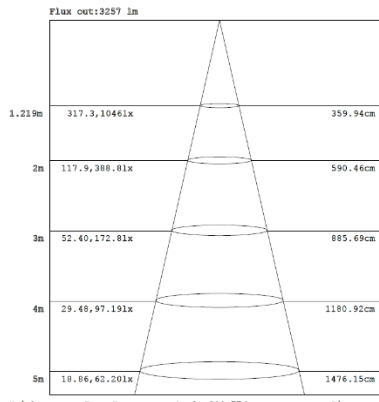


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

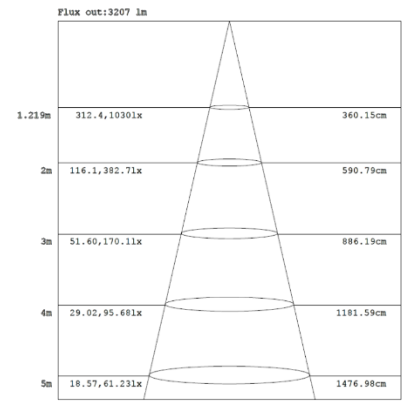


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

## 4 FOOT



50W 3,500K

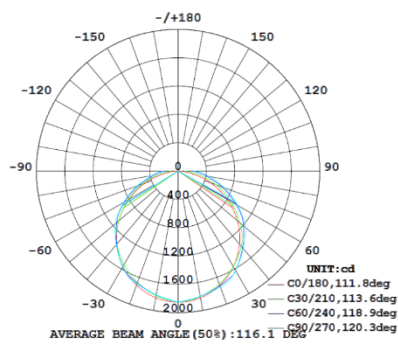


50W 4,000K

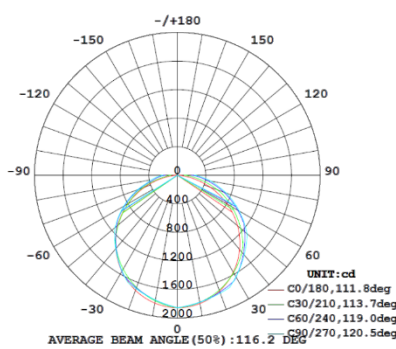


50W 5,000K

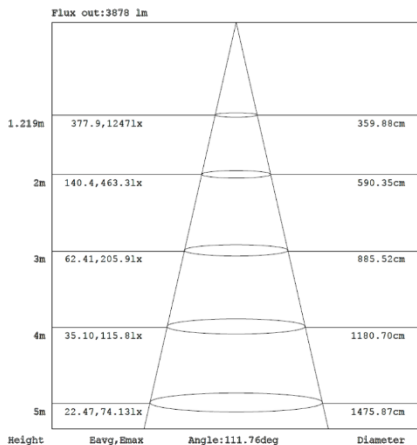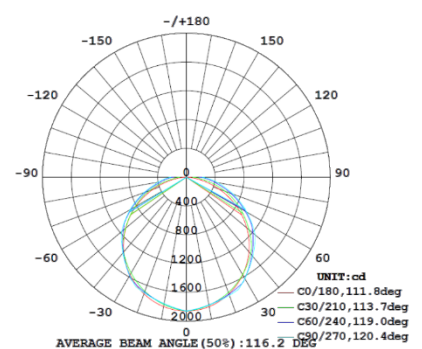

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

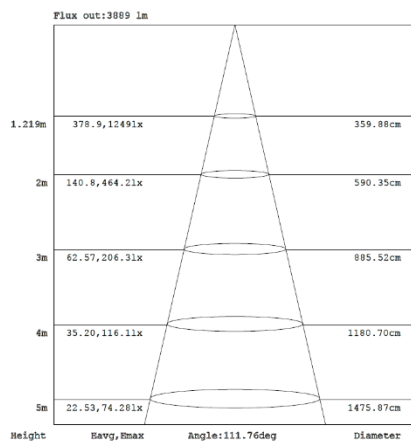



Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

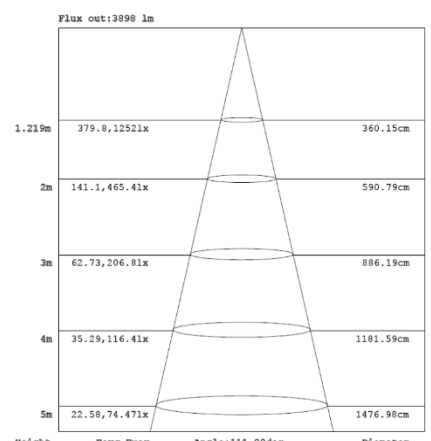

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



## 8 FOOT

60W 3,500K

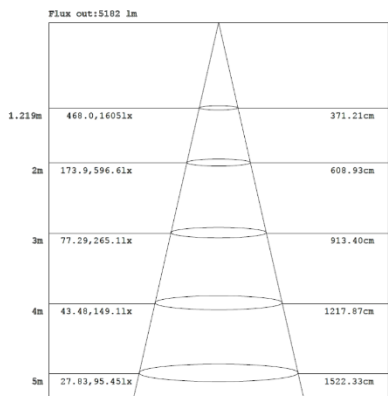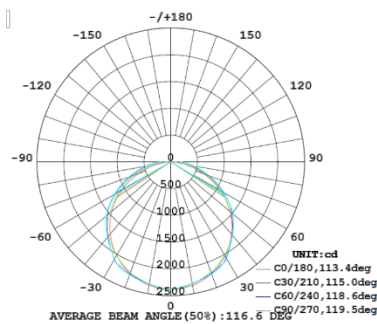



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

60W 4,000K

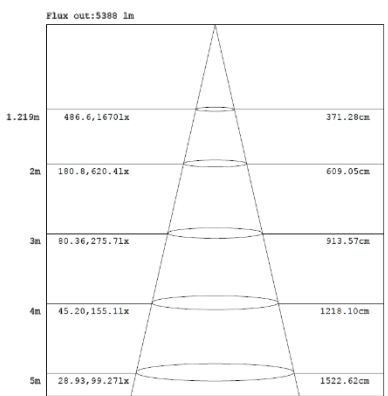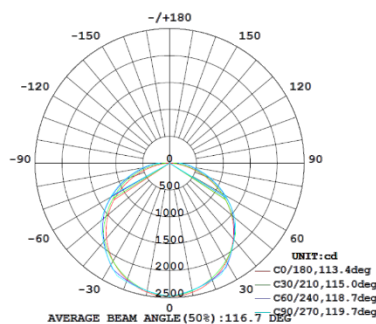

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



60W 5,000K

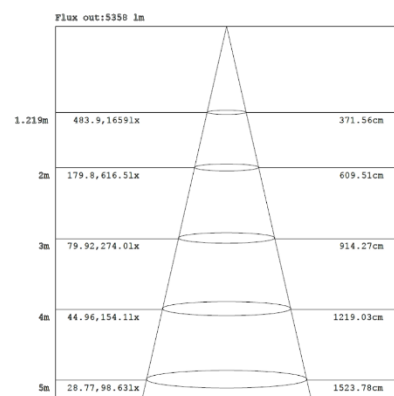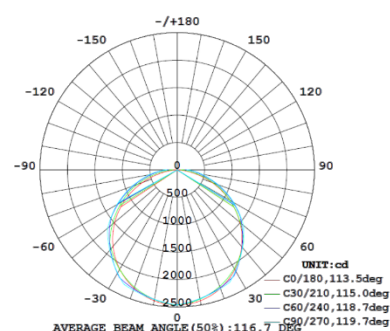

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



## 8 FOOT

80W 3,500K

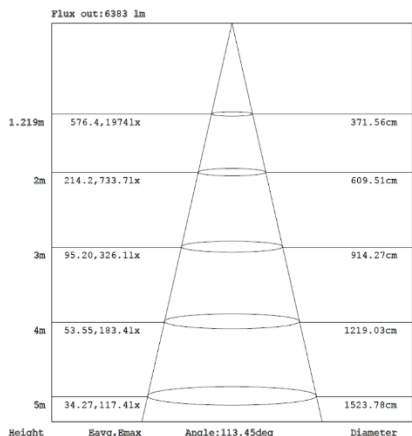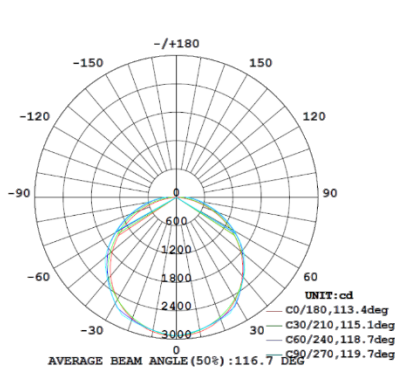



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

80W 4,000K

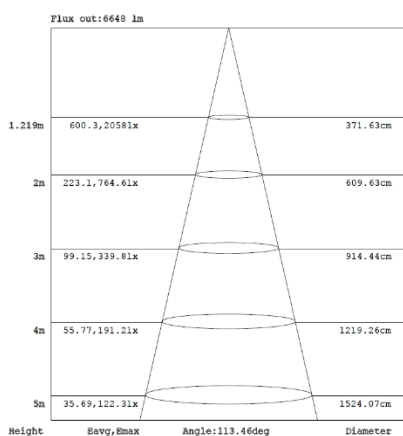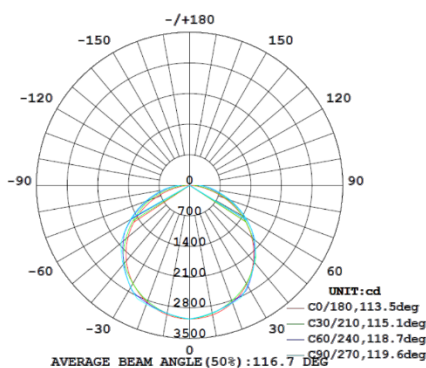

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



80W 5,000K

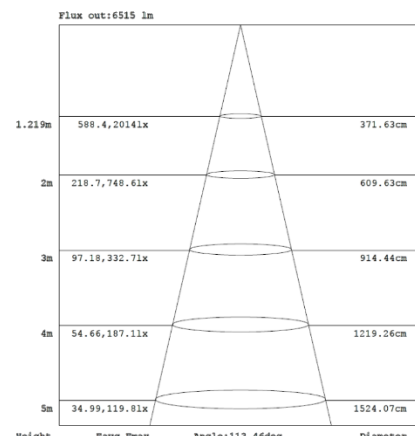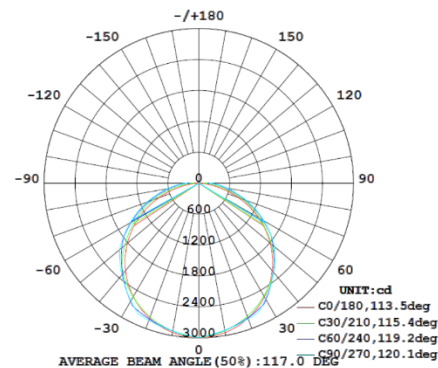

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



## 8 FOOT

100W 3,500K

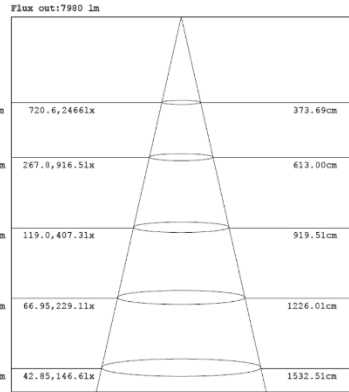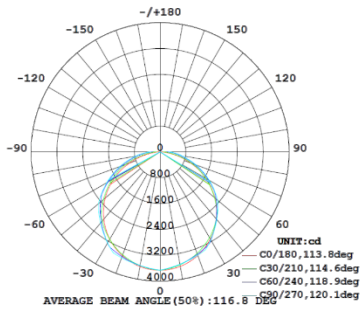



Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

100W 4,000K

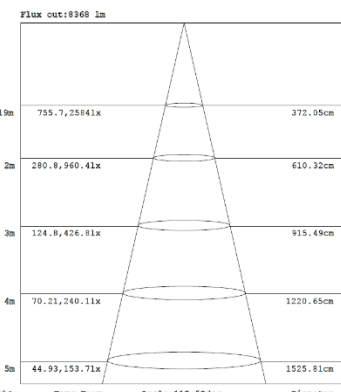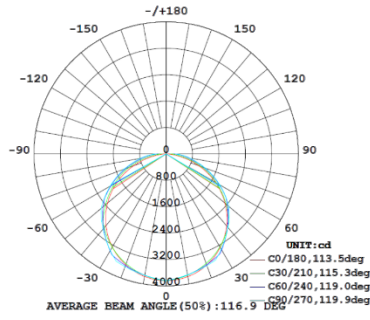

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

100W 5,000K

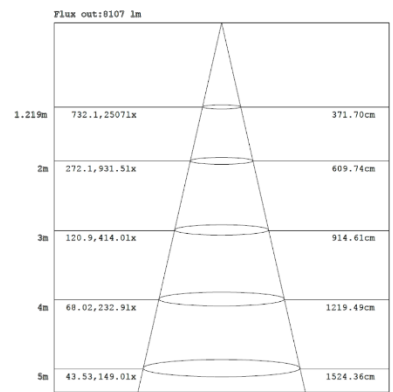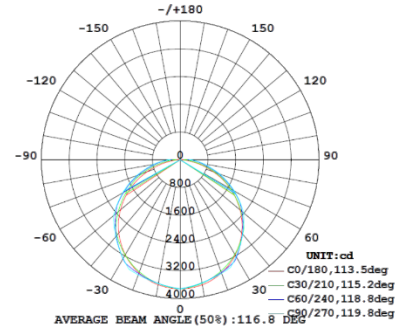

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

