

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED Multi Watt Multi CCT Adjustable Wall Pack Light Family Series

CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish. Integral secondary heat sink to optimize thermal transfer and maximize performance of the LEDs.

OPTICAL SYSTEM:

Philips Lumiled 3030 LED chips. High quality tempered glass optics. 100° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-347V input. -40°C to 40°C, -40°F to 104°F

INSTALLATION & MOUNTING:

Wall mount.

CONTROLS & DIMMING:


0-10V dimming comes standard.

FEATURES


- Default Wattage:
 - 50W
 - 100W
- Default CCT: 5,000K
- Photocell included
- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Residential Complexes
- Parking Decks
- Shopping Malls
- Sporting Complexes
- Logistic Centers
- Auto dealerships
- Municipal Lots

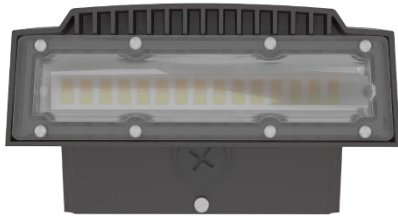

20W / 30W / 40W / 50W

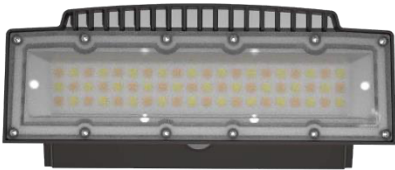

50W / 60W / 80W / 100W

DLC Product ID:

- LOC-AWP-MW(20/30/40/50)MCCT(30/40/50)D – S-YEV8RK
- LOC-AWP-MW(50/60/80/100)MCCT(30/40/50)D – S-G9FOKC

TAA Compliant Option Available.

Contact your Sales Representative for more information.



Intertek

WATTAGE	BUG RATING
50W	B3-U1-G1
100W	B3-U1-G1





LED Multi Watt Multi CCT Adjustable Wall Pack Light Family Series





LOC-AWP-MW(20/30/40/50)MCCT(30/40/50)D								
WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
20W	3000K / 4000K / 5000K	2,400LM	120lm/W	120-347V	70	0.9	20%	100W
30W	3000K / 4000K / 5000K	3,600LM	120lm/W	120-347V	70	0.9	20%	100W
40W	3000K / 4000K / 5000K	4,800LM	120lm/W	120-347V	70	0.9	20%	100W
50W	3000K / 4000K / 5000K	6,000LM	120lm/W	120-347V	70	0.9	20%	100W
LOC-AWP-MW(50/60/80/100)MCCT(30/40/50)D								
WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
50W	3000K / 4000K / 5000K	6,500LM	130lm/W	120-347V	70	0.9	20%	100W
60W	3000K / 4000K / 5000K	7,800LM	130lm/W	120-347V	70	0.9	20%	150W
80W	3000K / 4000K / 5000K	10,400LM	130lm/W	120-347V	70	0.9	20%	200W
100W	3000K / 4000K / 5000K	13,000LM	130lm/W	120-347V	70	0.9	20%	200W

MEASUREMENTS

20W / 30W / 40W / 50W

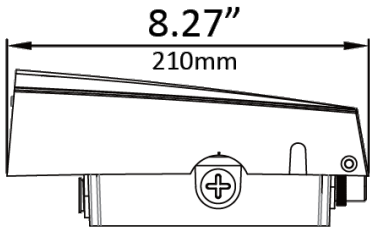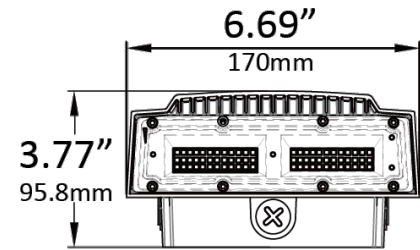

50W / 60W / 80W / 100W

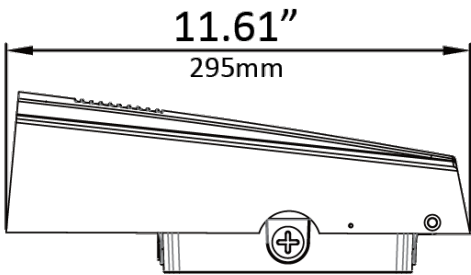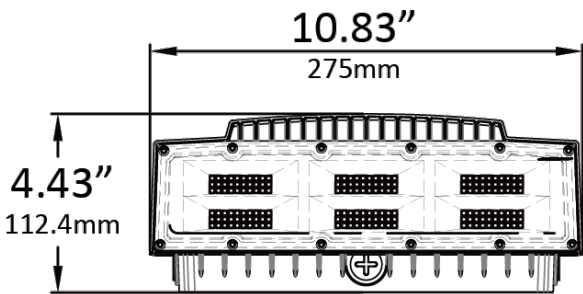

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-AWP-MW(20/30/40/50)MCCT(30/40/50)D	1	5.51lbs	16.14" x 9.84" x 15.75"	35.27lbs	6	00810050942737
LOC-AWP-MW(50/60/80/100)MCCT(30/40/50)D	1	8.6lbs	23.23" x 12.2" x 18.9"	56.44lbs	6	00810050942744

