

Tools Required:

-Trim removal tools (metal screwdrivers can damage the interior)

-4x Radio Removal Keys

-Small Metal File

-Pliers (optional)

Before Beginning:

Disconnect the negative terminal of your battery as a pre-caution


02- Begin prying the bottom of the radio's bezel using soft trim pry tools, or by using the tips of your fingers as shown.

If this panel has a tough time budging, then first remove the top of the climate control panel by pulling it towards you.

03- Begin prying the bezel from the top using a soft pry trim tool. Work your way around the trim piece slowly and carefully, to not damage the trim piece, vent and clips.

04- Gently pull the trim out towards you. There are two connectors on the top of the bezel which connect to the hazard button/airbag light. These will need to be disassembled and installed onto the new bezel.


Pro tip- use a hook tool in the hazard light compartment and pull outwards to help pull the vent and bezel out of the dash. The vent and bezel will come out as one piece.

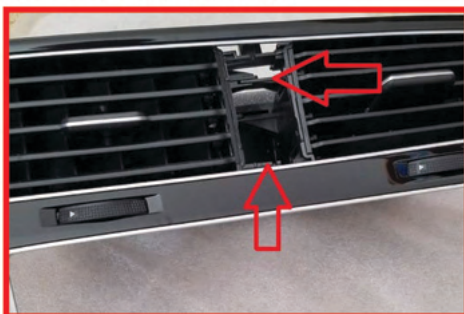

05- Place 4x radio removal keys in each of the indicated four locations. Once all four keys are locked into place, pull out existing screen



06- Remove two plugs from old screen and install into new LCD screen. Note, a small part of the white connector may need to be filed to fit into the 8" LCD housing, depending on the vehicle.

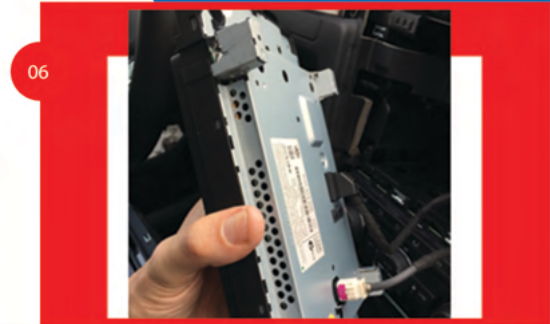

07- Install the new 8" display into the stock location until it audibly clips into place. Reassembly of the trim and vent is the reverse of disassembly. Simply install the hazard trim into the bezel and install the bezel/trim piece until everything clicks into place. Reinstall climate control panel if it was removed earlier.



Reconnect the negative battery terminal and test your new OEM EZT 8" Display. Also use this time to ensure all hazard lights/airbag lights are working properly.

Enjoy your new stereo hardware! Thanks for shopping with Eurozone Tuning!