

Type:

Model:

**BILTMORE Brass LED Mini Flood Light With Shroud**

**SPECIFICATIONS**

**VOLTAGE:**  
12 volts AC/DC.

**HOUSING:**  
Cast Brass.

**FINISH:**  
Weathered brass. Custom powder coated colors available.

**MOUNTING:**  
Threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories



**WIRING:**  
Pre-wired with a 5' 18/2 cable.

**WARRANTY:**  
Ten Years.



Ideal for applications such as landscape lighting, sign lighting, and building accent lighting. 150° (7H x 7V) beam.

**DIMENSIONS:**

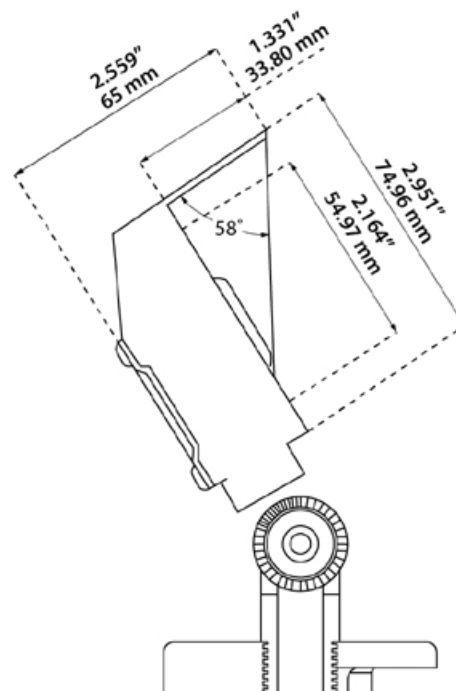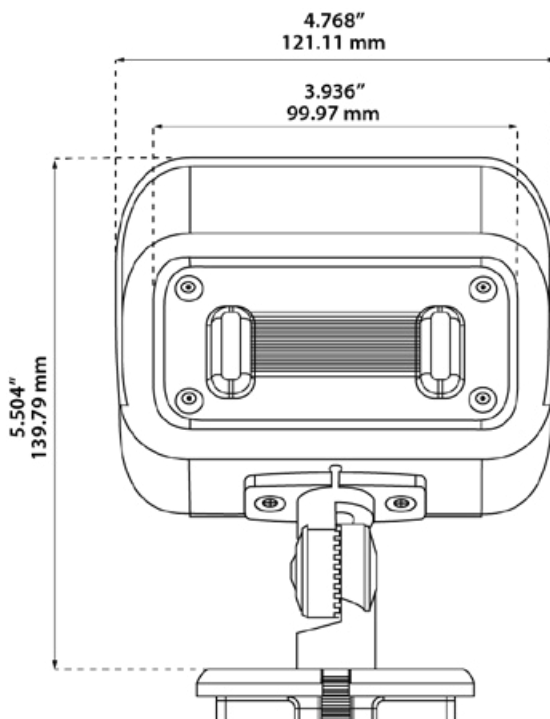

LED LAMP SPECIFICATIONS

**LAMP TYPE:**  
Integrated LED.

**OPTICS:**  
Integral optics providing available beam spread of 150° (7H x 7V).

**COLOR TEMPERATURES:**  
Color temperature options provide the following qualities: 2700K or 3000K.

**FIXTURE ORDERING INFORMATION**  
To order a fixture, select the appropriate choice from each column as in the following example:

EXAMPLE: 489940-MS



Model	489960	489961	489940	489941	489943	489944	489946	489947	Mounting
<b>Description</b>	BRASS MINI FLOOD 12V 4W 2700K	BRASS MINI FLOOD 12V 4W 3000K	LED-MF-BR-7W-2700K-12V	LED-MF-BR-7W-3000K-12V	LED-MF-BR-12W-2700K-12V	LED-MF-BR-12W-3000K-12V	BRASS MINI FLOOD 12V 20W 2700K	BRASS MINI FLOOD 12V 20W 3000K	<b>MS</b> Composite stake (incl.) 490034 <b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036 <b>PM</b> Round pier mount 490057 <b>MR</b> Round tapered 3-hole surface mount 490048 <b>MP</b> PVC/Brass post stake 490037
<b>Wattage</b>	4W	4W	7W	7W	12W	12W	20W	20W	
<b>Lumens</b>	312lm	356lm	544lm	626lm	918lm	1044lm	1720lm	1780lm	
<b>Efficacy</b>	78lm/W	89lm/W	77.71 lm/W	89.41 lm/W	76.53 lm/W	87lm/W	86lm/W	89lm/W	
<b>Volt Amps</b>	-	3.89VA	6.98VA	6.94VA	12.98VA	13.61VA	22.60VA	22.43VA	
<b>Color Temperature</b>	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	
<b>CRI</b>	80	80	80	80	80	80	80	80	