

BRYCE PERFORATED

Hanging Down Light for AR11 or MR16



DESCRIPTION

In a longer footprint than the original Bryce Hanging Down Light, the Bryce Perforated Hanging Down Light keeps the same one-piece construction and adds ambiance with its precision machined perforations.

BRYCE PERFORATED HANGING DOWN LIGHT

Use	Downlighting Techniques in Trees or Architecture by Hanging on a Chain or Cable	
Finish	Brass, Copper, or Brass w/ Black Cerakote®	
Includes	LightingShrink Professional Crimp and Heat Shrink Cable Connector	
Order With Lamp	AR11, 2W, 2700K, 60°	BRYCE-HDL-AR11-PERF-CU BRYCE-HDL-AR11-PERF-BR BRYCE-HDL-AR11-PERF-BR-BLK
	MR16, 4W, 2700K, 60°	BRYCE-HDL-MR16-PERF-CU BRYCE-HDL-MR16-PERF-BR BRYCE-HDL-MR16-PERF-BR-BLK
Order Without Lamp	Fits AR11	BRYCE-HDL-AR11-PERF-CU-NL BRYCE-HDL-AR11-PERF-BR-NL BRYCE-HDL-AR11-PERF-BR-BLK-NL
	Fits Chameleon MR16, MR16	BRYCE-HDL-MR16-PERF-CU-NL BRYCE-HDL-MR16-PERF-BR-NL BRYCE-HDL-MR16-PERF-BR-BLK-NL




Brass (BR)



Copper (CU)



Brass + Black Cerakote®
(BR-BLK)

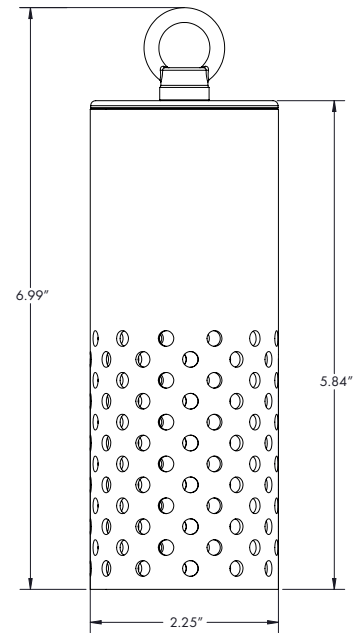



BRYCE-HDL-MR16-PERF-BR

INSTALLING THE LAMP

1. Unscrew the fixture body from the base.
2. Install the lamp in the socket.
3. Reinstall the fixture body.

HANGING THE FIXTURE

IMPORTANT: DO NOT INSTALL ON OR NEAR ANY HIGH VOLTAGE POWER LINES

1. Hang the fixture from a secure stainless steel eye bolt, with or without a chain.
2. Create a drip loop with the wire by bending the wire to a slope one inch below the fixture cap.