

SDECIEICATION SHEET

1633 Staunton Ave Los Angeles, CA 90021 FAX. TEL. (800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

1

Fixture Specifications: Housing: Corrosion resistant Solid Brass 1's shaped design: Fixture is prewired with a 30, 18-2 direct burial cord Wire connector sold separately. Stem: Solid brass pipe with ½' NPT on bottom Fixture is prewired with a 30, 18-2 direct burial cord Wire connector sold separately. Finist: Ad-Antique Brows: Natural toring process. Ad-Antique Brows: Natural toring process. High impact, sandblasted, had ned linear lenses Earn: High impact, sandblasted, had ned Stinishes. Mire and Stinishes Mire and Stinishes Lam: Designed to use a 12V, T3 LED lamp only. Mire and Stinishes Aremoty and Stinishes Lam: Designed to use a 12V, T3 LED lamp only. Wire and Stinishes Mire and Stinishes Not to be used with halogen/xenon lamps. Warranty: Limited lefterine warranty on fixture housing against manufacturer's defects. Warranty: Limited lefterine warranty on fixture housing expenditure is used with halogen/xenon lamps. Starter is antigate from Corona Lighting. Voltable LED LAMPS (corose LEP lamps take the type lambus the warrant warrant on fixture housing expenditure is defects. Mire and antigation process. Warranty: Warranty: Limited lefterine warranty on fixture housing expenditure is defects. Warranty: Limited lefterine warranty on fixture housi								
Hussing: Corrosion resistant Solid Brass 'L' shaped design Find and the state provide with 37, 18-2 direct build cord Wire connector (CX 389, silcone filled wire nu. (CX	PROD	UCT # : C	L-7171	B-AB		•Path L	.ights	Solid Brass
Stem: Solid brase pipe with ½* NPT on bottom Finish: AF - Antique Bronze. Natural loning process. AB available in GM, and SI finishes. Wite connector (CX-339), silicone filled wire nu (CX-3854) or quick koding wire connector (CX-302) are available from Corona Lighting. Lons: High impact, sandblasted, hear tesistant clear glass. Exit frosted and linear lenses include. Mounting Spike: Standard injection molded spike with ½' NPT threac diame hub. Socket: Top grade fixed ceramic bi-pin socket. Easy tool-free imm access. Call biologic form Corona Lighting. Lamp: Designed to use a 12V, T3 LED lamp only Available with no lamp or in LED (2W or 2.5W). See the Lamp Guide blow for more information. Not to be used with halogen/xenon lamps. Warranty: Limited lifetime warranty on fiture housing against manufacturer's defects. WarkLABLE LED LAMPS (Conset LED lamps have a five (9) year biology on the targe of the biol form one information. Not to be used with halogen/xenon lamps. Varianty: Limited lifetime warranty on fiture housing against manufacturer's defects. WMLABLE LED LAMPS (Conset LED lamps have a five (9) year biology on the year biology on the trans of the targe of the targ	Fixture	Specificatio	ons:					
Stom: Solid brass pipe with ½! NPT on bottom Finish: AB-Antique Broze. Natural toring process. Also available in GM, and & Intishes. Universal connector (CX-339), silicone filled wire nu (CX-486) or quick locking wire connector (CX-LOC) are available from Corona Lighting. Socket: Top grade fixed ceramic bi-pin socket. Easy tool-free lamp access. Mounting Spike: Standard injection moled spike with ½? NPT threat formation. Socket: Top grade fixed ceramic bi-pin socket. Easy tool-free lamp access. A remote 12V transformer is required. Options are available from Corona Lighting. Socket: Top grade fixed ceramic bi-pin socket. Easy tool-free lamp access. A remote 12V transformer is required. Options are available from Corona Lighting. Munting Spike: Top grade fixed ceramic bi-pin socket. Easy tool-free lamps. Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects. Lamp: Designed to use a 12V, T3 LED lamp only. Available with natogen/xenon lamps. Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects. Wart to be used with halogen/xenon lamps. Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects. VALLABLE LED LAMPS (corona Light mark to the prove store at the fixed arean fixed to react the fixed arean to the prove store at the fixed arean to the prove store at the prove store at the fixed arean to the prove store at the prove store at the fixed arean to the prove	Housing:	ousing: Corrosion resistant Solid Brass "L" shaped design				Wiring:		Fixture is prewired with a 3ft, 18-2 direct burial cord
Finish: AB-Antique Bronze. Natural toning process. AB finish will vary due to artistic process. Ab finish will vary due to artistic process. Ab finish will vary due to artistic process. Extra forsted and linear lenses included. Mounting Spike: Standard injection molded spike with ½' NPT thread female hub. Lens: High inpact, sandblasted, hear resistant clear glass. Extra forsted and linear lenses included. Mounting Spike: Standard injection molded spike with ½' NPT thread female hub. Socket: Top grade fixed ceramic bi-pin socket. Easy tool-free lamp access. Are mole 12V transformer is required. Options are available from Corona Lighting. Lamp: Designed to use a 12V, T3 LED lamp only. As to be used with halogen/xenon lamps. Warranty: Linead first process. Warranty: Linead first process. Warranty: Linead first process. Warranty: Linead with halogen/xenon lamps. Warranty: Linead process. Warranty: Linead process. Warranty: Linead process. WAILABLE LED LAMPS (corona LED lamos have a five (6) year intend warrary against manufacturer's defects. MALOGEN MALOGEN Amp Number Wartty Street Active 2 3800 2000 27000 25.000 20 watt HALOGEN For rore additional Lamps, and accessories wid Coornaligning cort Coornaligning cort MALOGEN DOIE IFF: Coornaligning	Stem:							Wire connector sold seperately. Universal connector (CX-839), silicone filled wire nu
Lons: High impact, sandblasted, heat resistant clear glass. Extra frosted and linear lenses included. Socket: Top grade fixed ceramic bi-pin socket. Easy tool-free impacess. Lamp: Designed to use a 12V, T3 LED lamp only. Available with no lamp or in LED (2W or 2.5W). See the Lamp Ciuck below for more information. Not to be used with halogen/xenon lamps. Warranty: United littlere warranty on fixture housing against mudacturer's defects. Warranty: United littlere warranty against mudacturer's defects. Warranty: United littlere warranty against mudacturer's defects. Warranty: United littlere warranty against Marranty against Marr	Finish:	AB finish will vary o	due to artistic	process.	ess.		0	(CX-854) or quick locking wire connector (CX-LOC) are available from Corona Lighting.
Secker: Top grade fixed ceramic bi-pin socket. Easy tool-free Hamp: Designed to use a 12V, T3 LED lamp only. Secker: Top grade fixed ceramic bi-pin socket. Easy tool-free Hamp: Designed to use a 12V, T3 LED lamp only. See the Lamp Guide below for more information. Warranty: Not to be used with halogen/xenon lamps. Warranty: Warranty: Use of the comparison of the compariso	Lens:	High impact, sandb	plasted, heat	resistant cle	ear glass.			female hub.
Lamp: Designed to use a 12V, T3 LED tamp only. Available with notamp or in LED (2W or 2.5W). See the Lamp Oulde below for more information. Not to be used with halogen/xenon tamps. Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects. Limited lifetime warranty against manufacturer's defects. Limited l	Socket:		ramic bi-pin s	ocket. Easy	tool-free			available from Corona Lighting. Voltage range for LED lamps are 8V-21V.
See the Lamp Guide below for more information. Not to be used with halogent/xenon lamps.	Lamp:							
AVA Amber color For Amage additional Langos, and accessories visit Coronelighting con		See the Lamp Guid	de below for i	more inform		Warran	ty:	
AMP NUMBERWATTSSPREADLUMENTEMP.HOURSEQUIVALENTTYPE:DATE:-EDT3-2W2360°2002700K25,00020 WattJOB NAME & ADDRESS:-EDT3-2.5W2.5180°2402700K25,00035 WattJOB NAME & ADDRESS:-EDT3-2W-3K2360°2103000K25,00035 WattJOB NAME & ADDRESS:-EDT3-2.5W-3K2.5180°2503000K25,00035 WattPRODUCT #:-EDT3-AM*2360°1702000K25,00020 WattPRODUCT #:-EDT3-AM*2360°1702000K25,00020 WattTOTAL QUANTITY:-AM- Amber color								
-EDT3-2W 2 360° 200 2700K 25,000 20 Watt -EDT3-2.5W 2.5 180° 240 2700K 25,000 35 Watt -EDT3-2W-3K 2 360° 210 3000K 25,000 20 Watt JOB NAME & ADDRESS: -EDT3-2W-3K 2 360° 210 3000K 25,000 35 Watt JOB NAME & ADDRESS: -EDT3-2.5W-3K 2.5 180° 250 3000K 25,000 35 Watt PRODUCT #: -EDT3-AM* 2 360° 170 2000K 25,000 20 Watt PRODUCT #: * AM- Amber color For more additional Lamps, and accessories visit Coronalighting.com X <th></th> <th>E LED LAMPS (Core</th> <th>ona LED lamps h</th> <th>ave a five (5) ye</th> <th>2W &</th> <th>2.5W</th> <th></th> <th></th>		E LED LAMPS (Core	ona LED lamps h	ave a five (5) ye	2W &	2.5W		
LD 13-2_3W 2.3 160 240 2700K 23,000 30 wait EDT3-2W-3K 2 360° 210 3000K 25,000 20 Watt EDT3-2.5W-3K 2.5 180° 250 3000K 25,000 35 Watt EDT3-AM* 2 360° 170 2000K 25,000 20 Watt * AM- Amber color * * TOTAL QUANTITY: LAMP TYPE & WATTAGE: For more additional Lamps, and accessories visit Coronalighting.com * Katter in the second		-	BE	AM	2W & ear limited warrar COLOR &	2.5W hty against man RATED	ufacturer's defect HALOGEN	
-EDT3-2.5W-3K 2.5 180° 250 3000K 25,000 35 Watt -EDT3-AM* 2 360° 170 2000K 25,000 20 Watt PRODUCT #: PAM- Amber color	AMP NUMBE	R WATTS	BE SPREAD 360°	LUMEN 200	2W & ear limited warrar _ COLOR & TEMP. 2700K	2.5W any against manu RATED HOURS 25,000	ufacturer's defec HALOGEN EQUIVALEN 20 Watt	(s) TYPE: DATE:
DDTS-ANI* 2 360 170 2000K 23,000 20 wait * AM- Amber color TOTAL QUANTITY: LAMP TYPE & WATTAGE: For more additional Lamps, and accessories visit Coronalighting.com TRANSFORMER: CONTRACTOR:	AMP NUMBE -EDT3-2W -EDT3-2.5W	R WATTS	BE SPREAD 360° 180°	200 240	2W & ear limited warran COLOR & TEMP. 2700K 2700K	2.5W hty against manu RATED HOURS 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt	(s) TYPE: DATE:
For more additional Lamps, and accessories visit Coronalighting.com LAMP TYPE & WATTAGE: TRANSFORMER: CONTRACTOR:	AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W	R WATTS	BE SPREAD 360° 180° 360° 180°	AM LUMEN 200 240 210 250	2W & ear limited warrar COLOR & TEMP. 2700K 2700K 2700K 3000K 3000K	2.5W ty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	(s) TYPE: DATE: JOB NAME & ADDRESS:
LAMP TYPE & WATTAGE: TRANSFORMER: CONTRACTOR:	AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2W-3 -EDT3-AM*	WATTS 2 2.5 K 2 -3K 2.5 2 2	BE SPREAD 360° 180° 360° 180°	AM LUMEN 200 240 210 250	2W & ear limited warrar COLOR & TEMP. 2700K 2700K 2700K 3000K 3000K	2.5W ty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	(5) JOB INFORMATION TYPE: DATE: JOB NAME & ADDRESS: PRODUCT #:
CONTRACTOR:	AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	WATTS 2 2.5 K 2 -3K 2.5 2 2 or 2	BE SPREAD 360° 180° 360° 180° 360°	AM LUMEN 200 240 210 250 170	2W & ear limited warrar COLOR & TEMP. 2700K 2700K 2700K 3000K 3000K	2.5W ty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	(2) (2) (5) (5) (7) (7) (7) (7) (7) (7) (7) (7
	AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	WATTS 2 2.5 K 2 -3K 2.5 2 2 or 2	BE SPREAD 360° 180° 360° 180° 360°	AM LUMEN 200 240 210 250 170	2W & ear limited warrar COLOR & TEMP. 2700K 2700K 2700K 3000K 3000K	2.5W ty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	2" JOB INFORMATION TYPE: DATE: JOB NAME & ADDRESS: PRODUCT #: TOTAL QUANTITY: LAMP TYPE & WATTAGE:
SPECIFIER:	AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	WATTS 2 2.5 K 2 -3K 2.5 2 2 or 2	BE SPREAD 360° 180° 360° 180° 360° 360°	AM LUMEN 200 240 210 250 170	2W & ear limited warrar COLOR & TEMP. 2700K 2700K 2700K 3000K 3000K	2.5W ty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	(5) JOB INFORMATION T TYPE: DATE: JOB NAME & ADDRESS: PRODUCT #: TOTAL QUANTITY: LAMP TYPE & WATTAGE: TRANSFORMER:
	AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	WATTS 2 2.5 K 2 -3K 2.5 2 2 or 2	BE SPREAD 360° 180° 360° 180° 360° 360°	AM LUMEN 200 240 210 250 170	2W & ear limited warrar COLOR & TEMP. 2700K 2700K 2700K 3000K 3000K	2.5W ty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	(5) JOB INFORMATION T TYPE: DATE: JOB NAME & ADDRESS: PRODUCT #: TOTAL QUANTITY: LAMP TYPE & WATTAGE: TRANSFORMER:
	AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	WATTS 2 2.5 K 2 -3K 2.5 2 2 or 2	BE SPREAD 360° 180° 360° 180° 360° 360°	AM LUMEN 200 240 210 250 170	2W & ear limited warrar COLOR & TEMP. 2700K 2700K 2700K 3000K 3000K	2.5W ty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	2" JOB INFORMATION TYPE: DATE: JOB NAME & ADDRESS: PRODUCT #: TOTAL QUANTITY: LAMP TYPE & WATTAGE: TRANSFORMER: CONTRACTOR:

Example: CL-717B-AB-L-EDT3-2W-3K


CL - 717B-AB - L-EDT3 - 2W-3K • Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.



ACCESSORIES SHEET

1633 Staunton Ave Los Angeles, CA 90021 FAX. TEL. (800) 727-9957 (800) 727-9262 (213) 747-3234 (213) 747-4500

E-Mail: sales@coronalighting.com

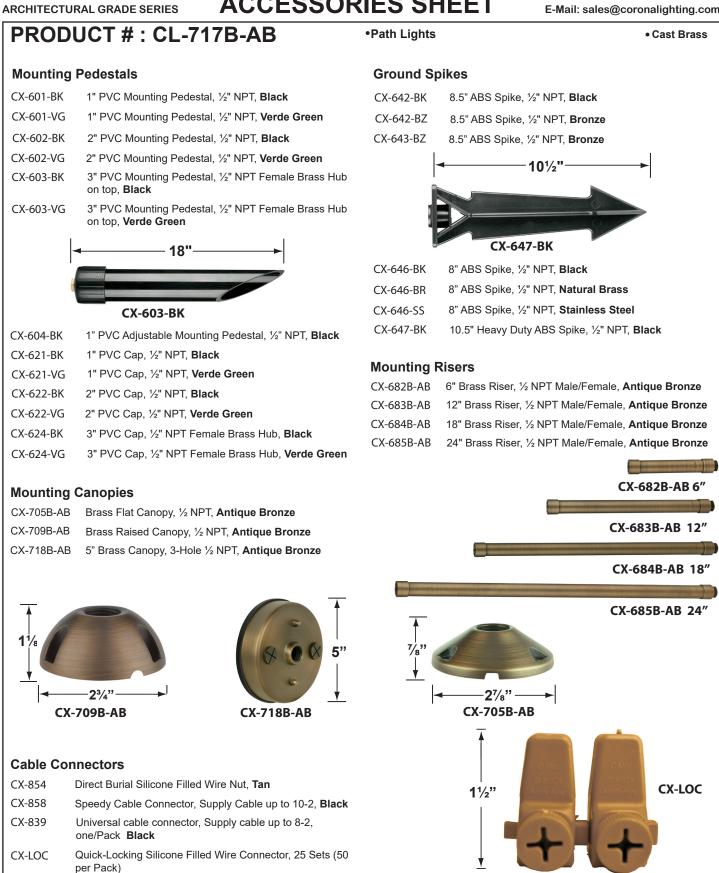

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.

|←⁵/₈"**→**|