






PRODUCT SPECIFICATIONS

PROJECT:	
MODEL #: LAMP(S):	
NOTES:	



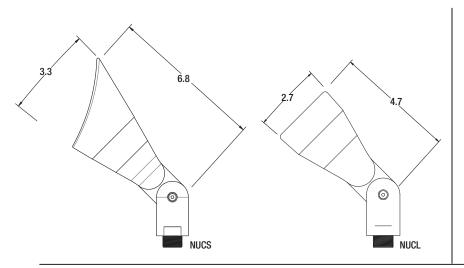

Specifications:

- Marine grade A360 alloy construction
- · High temperature silicone o-rings
- 1' FLEX™ Auxiliary wire lead
- 15' direct burial cable
- AMC Anti-Moisture Connections
- · Available in shrouded and non-shrouded version
- 8W max. LED lamp / 35W max. halogen
- Bronze finish
- E-Shield[™] coating process
- · Composite stake with brass threaded insert
- · Limited 10 year warranty

Light Distribution Cones:

LED-8W-CM6FL27K

Illuminance at a Distance				
Center Beam fc		Beam Width		th
4.3R	81.8 fc		3.0 ft	3.1 ft
8.7ft -	20.0 fc		6.2 ft	6.2 ft
13.0ft -	8.95 fc		9.2 ft	9.2 ft
17.3R	5.06 fc		12.3 ft	12.3 ft
21.7ft -	3.21 fc		15.4 ft	15.4 ft
26.0R	2.24 fc		18.4 ft	18.4 ft
Vert. Spread: 39.0° Horiz. Spread: 39.1°				

LED-8W-CM6FL30K

	Illuminance at a Center Beam fc	Dis	Beam Width	
4.3ft	86.1 fc		3.0 ft	3.0 ft
8.7ft	21.0 fc		6.1 ft	6.0 ft
13.0R	9.42 fc		9.1 ft	9.0 ft
17.3R	5.32 fc		12.1 ft	12.0 ft
21.7R	3.38 fc		15.2 ft	15.0 ft
26.0R	2.35 fc		18.2 ft	18.0 ft
	Vert. Spread: 38.5° Horiz. Spread: 38.2°			



Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.

UNIQUE LIGHTING SYSTEMS®





Fixtures Part Number Description NUCL-NL-BK NUCLEUS, ALLOY, NL, BK NUCL-NL-BZ NUCLEUS, ALLOY, NL, BZ NUCL-NL-TT NUCLEUS, ALLOY, NL, TT NUCL-L427-BK NUCLEUS, ALLOY, LED427K, BK NUCL-L427-BZ NUCLEUS, ALLOY, LED427K, BZ NUCL-L427-TT NUCLEUS, ALLOY, LED427K, TT NUCS-NL-BK NUCLEUS, SHROUD, ALLOY, NL, BK NUCS-NL-BZ NUCLEUS, SHROUD, ALLOY, NL, BZ NUCLEUS, SHROUD, ALLOY, NL, TT NUCS-NL-TT NUCS-L427-BK NUCLEUS, SHROUD, ALLOY, 12V, LED, 4W, 27K, BK NUCS-L427-BZ NUCLEUS, SHROUD, ALLOY, 12V, LED, 4W, 27K, BZ NUCS-L427-TT NUCLEUS, SHROUD, ALLOY, LED427K, TK

	Finishes
Description Particle Dome Mounting Base	Finishes Standard Finish BZ - Bronze BK - Black TT - Tucson Tan