



RADII™ FOUNTAIN

F140R

Suggested Specification

Model F140R shall include a vandal resistant button to activate the water flow. Fountain shall be designed to eliminate splashing and standing water. Bubbler shall have flexible guard and operate between 20 and 120 PSI. Drinking water coolers shall comply with ANSI A117.1-1992 and ADA frontal approach requirements. Listed by Underwriters' Laboratories to U.S. and Canadian standards. Shall comply with the Safe Drinking Water Act and Lead Contamination Control Act. Shall comply with ANSI/NSF 61. RADII™ Modular Fountain meets the needs of the physically challenged and the able-bodied.

Model F140R

A light press of the button activates the water flow

Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Bottom panel includes vandal resistant screws
- > Flexible vandal resistant bubbler guard
- > Waterways are Lead-Free in Materials & Construction
- > Brushed Stainless Steel Finish
- > Limited 1-Year Warranty

Finishes

- > Standard Cabinet Finish: Stainless Steel
- > Optional Cabinet Finish (at additional cost): Regency Bronze

Installation

- > Prior to roughing-in, consult local, state and federal codes for proper mounting height.

Weight

- > Net weight approximately 19 lbs.



Options (at additional cost)

- Stainless Steel Bubbler
- Vandal Resistant screw kit (036704-002)

Limited 1-Year Warranty (Continental limits of the United States and Canada): One year from date of installation on parts only. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Export Warranty: One year on component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Models covered by this specification comply with all known Plumbing Codes. Drinking water coolers shall comply with ANSI A117.1-1992 and ADA frontal approach requirements. Listed by Underwriters' Laboratories to U.S. and Canadian standards.

Water Coolers are classified by Underwriters Laboratories Inc. in accordance with ANSI/NSF 61.


Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

ADA Compliant when installed in an alcove or with right and left wing walls.




Oasis International Product
Certified by NSF to
NSF/ANSI Standard 61, G

**OASIS® RADII™ FOUNTAIN MODEL F140R, F140REE
SUNROC® DF-2601, DF-2601HF**

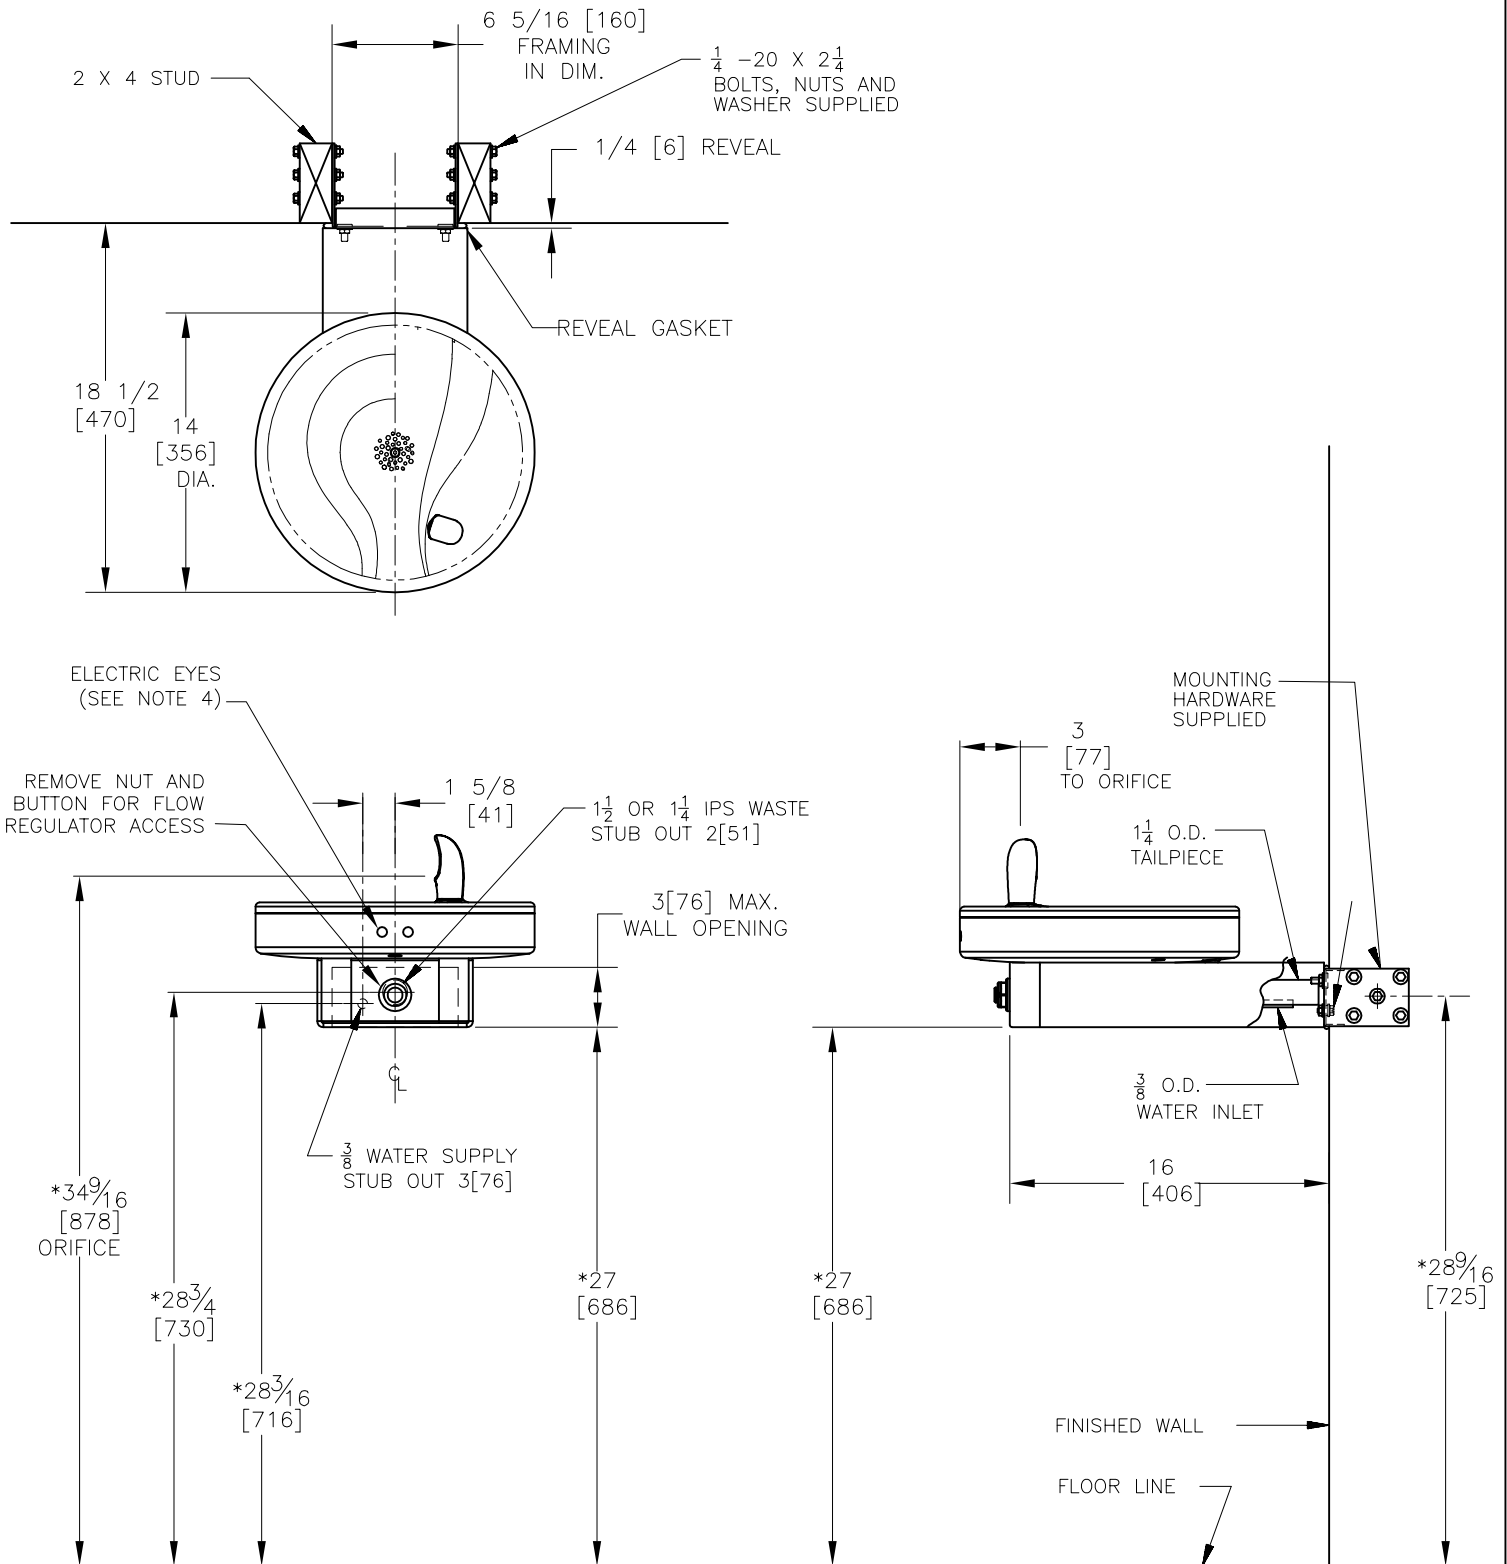

NOTES:

1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE AND 3/8 COMP. FITTING NOT PROVIDED.
3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.
4. ELECTRIC EYE MODEL HAS NO MANUAL ACTIVATION



ROUGHING-IN
AND
DIMENSIONAL DRAWING