

# Graphite Lubricant

Product # 336

## High-temperature dry lubricant

This high-grade, dry graphite liquid is designed to eliminate friction and protect high-use equipment. It's a durable, heavy-duty lubricant that can endure extreme temperatures up to 900°F. It dries quickly and sheds moisture to prolong the working life of equipment and machinery.

### Use on:

- Cast Iron
- Steel Alloys
- Conveyors and Rollers
- Copper
- Brass
- Titanium
- NOTE: May harm painted or waxed surfaces.

### Features and Benefits

- Offers long-term protection, even when exposed to steam, damp atmospheres and salt spray.
- Protects metal parts under sustained temperatures up to 2100°F.
- Acts as a sealant, reduces friction and makes tighter, firmer joints.

### Properties

Appearance.....	Black liquid
Fragrance.....	Solvent
Ready to use.....	Yes
Specific gravity.....	0.85
Flash point.....	130°F
Stability.....	1 year

### Directions

Complete directions on product label  
Clean surface of oil, grease and soils. Use with grease or gun pressure pump.

NOTE: May harm painted or waxed surfaces. Always test in an inconspicuous area before using.

### Ingredients

	CAS Number
Solvent Naphtha, Medium Aliphatic.....	64742-88-7
Distillates (Petroleum), Hydrotreated Light.....	64742-47-8
Alkanes, C14-16.....	90622-46-1
Distillates (Petroleum) Hydrotreated Heavy Naphthenic.....	64742-52-5
Graphite.....	7782-42-5


### Safety

DANGER: Flammable liquid and vapor. May be fatal if swallowed and enter airways. May cause cancer.

### DOT Shipping (ground transportation)

Proper Shipping Name:	Flammable liquids, n.o.s.
Class:	3
ID Number:	UN1993
Package Group:	III

### NFPA® RATINGS

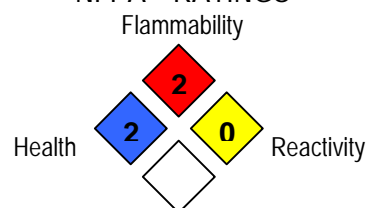

### Quantities

30, 35 & 55 gallon  
5 or 6 gallon  
6x1 gallon  
4x1 gallon

