

Tank Saver

Product # 627

Silicate protect against rust and corrosion

This product inhibits rust and corrosion formation in all metal water tanks. Designed for fire departments, utility, industrial and municipal storage tanks, laundry and hotel water storage systems and emergency water supply facilities. It forms a thin protective film on exposed metal surfaces. This non-toxic, odorless and tasteless inhibitor protects all metals including iron, steel, galvanized, brass, bronze, copper and alloys. It leaves no toxic residue, so treated tanks may be used for potable water without cleaning or rinsing.

Use in metal water-storage tanks:

- Fire departments
- Utilities
- Laundry /Hotel water storage systems
- Emergency water supplies
- Industrial/ Municipal storage tanks
- Potable water tanks

Effective Against:

- Rust
- Corrosion

Features and Benefits

- Forms a thin, protective film on all exposed metal surfaces.
- Designed for utility, industrial and municipal storage tanks in fire departments, laundry and hotel water storage systems.
- Non-toxic, odorless and tasteless formula.
- Protects all metals including iron, steel, galvanized steel, brass, bronze, copper and alloys.
- May be used for potable water without rinsing.

Properties

Appearance.....	Slightly hazy
Fragrance.....	None
Concentrate.....	Yes
Specific gravity.....	1.1
Flash point.....	None
pH.....	11.0-14.0

Directions Complete directions on product label

For Storage Tanks: Add 1 gallon for each 1,000 gallons of water each time tank is filled.

In Flowing Systems: Inject 3 gallons 10,000 gallons water. After 6-8 weeks, initial treatment, maintain system with 1 gallon per 10,000 gallons of water.

For Potable Water Systems: Inject 10 ½ to 13 gallons with 100,000 gallons of water. Then 6-8 weeks after the initial treatment period, feed at a rate of 5 ¼ - 6¾ gallons with 100,000 gallons potable water.

Ingredients

Water.....	7732-18-5
Sodium Silicate.....	1344-09-8

CAS Number


Safety

DANGER: Causes skin irritation. Causes serious eye damage. Keep out of the reach of children.

DOT Shipping (ground transportation)

Proper Shipping Name:	None
Class:	None
ID Number:	None
Packing Group:	None

NFPA® RATINGS

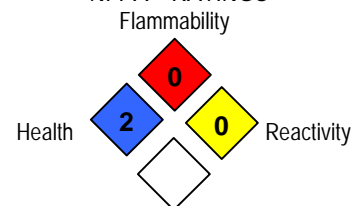

Quantities

- 30, 35 & 55 gallon
- 5 or 6 gallon
- 6x1 gallon
- 4x1 gallon