

INSTALLATION INSTRUCTIONS

COMPOSITE OR VINYL SLEEVED WOOD POSTS


End posts must be braced top and bottom and be sized to support 10 or 11 cable runs at 200 lbs each (2,000–2,200 lbs overall). Intermediate support posts should be spaced no more than 42" apart. End posts should be spaced no more than 20' apart. Cable runs should be spaced no more than 3" apart.

Angled Sections:

Follow the same instructions as for straight runs. Cable will flex as it exits the Bullet.

Be sure to align Bullets so the set screw is accessible relative to the angled cable.

If stair treads or handrails make it difficult to install Bullets, install them prior to setting the posts.

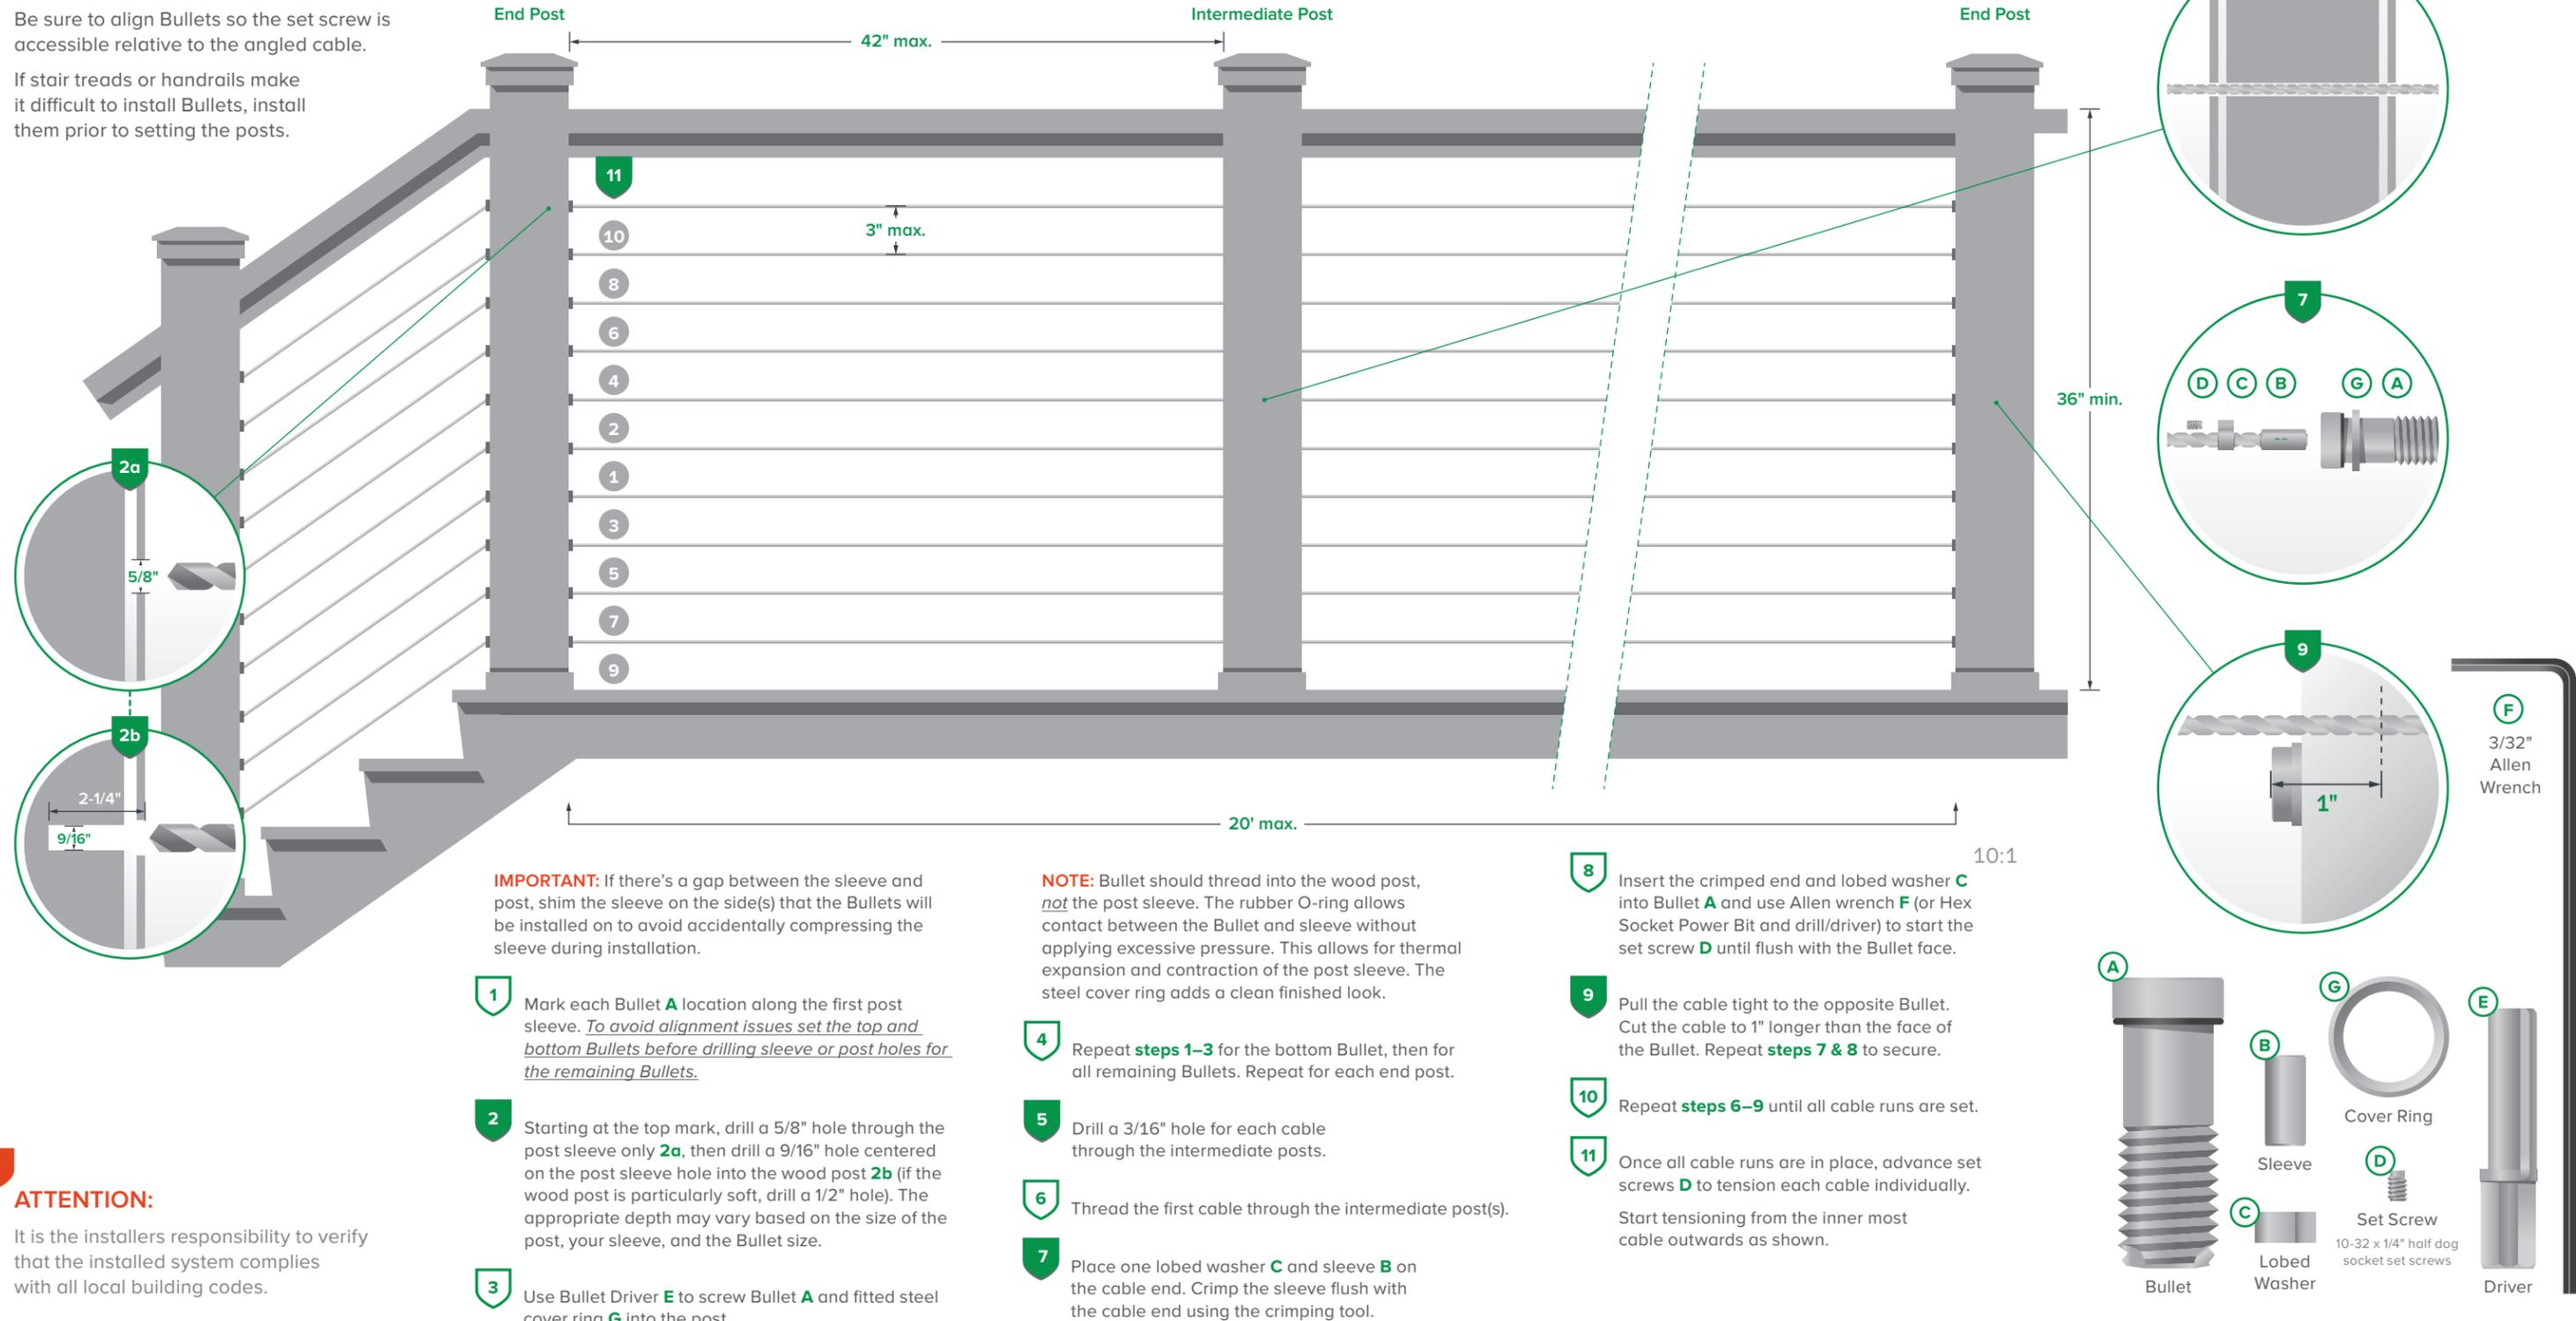

ATTENTION:

It is the installers responsibility to verify that the installed system complies with all local building codes.