
50", 55", & 60" Panel Fans







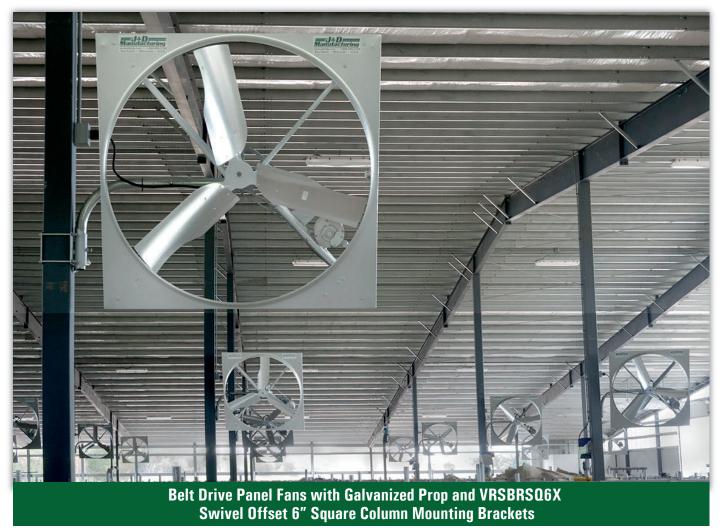

▲WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Due to our continual effort to provide the best products available and adhere to market conditions; literature, products, prices and availability are subject to change without notice.



50", 55", & 60" Panel Fans

J&D Manufacturing's Panel Fans have a rugged x-frame mount with an efficient motor and a powerful balanced blade that is designed to create comfortable air velocity. The cushion-mounted maintenance-free bearings and heavy-duty automatic belt tensioning device make this fan high performing, low maintenance, and a great value.

Features

- Ships fully assembled and ready for installation
- Durable cast iron pulleys
- Balanced, high-output, galvanized prop or Lifetime Warranty cast aluminum prop
- Heavy-duty, G90 galvanized, 18-gauge venturi with gusset support X-frame, provides superior strength and rigidity to minimize vibration compared to angle iron, square, or round tube designs
- 50", 55", and 60" models include an auto belt tensioner to reduce bounce at startup and provide self-adjusting uniform loading throughout the life of the belt for high efficiency
- Shaft bearings are eccentric locking, pre-lubricated, permanently sealed, rubber mounted for smooth operation and reduced blade fatigue, and are covered by a **Three Year Warranty**
- Wide assortment of optional mounting brackets for wood and steel posts for precise airflow
- Maximize your cooling capabilities by adding a stainless steel,
 12-nozzle, high pressure fog ring kit
- Totally enclosed, maintenance-free, high-efficiency motors have completely sealed ball bearings, UL and CUL recognized, and are covered by a **Two Year Warranty**

Installation Options

| Part# | Description | | | | | | |
|--|---|--|--|--|--|--|--|
| | | | | | | | |
| | t Post Mounting Bracket | | | | | | |
| VRSBRPR6PX | 4"-6" Wood Post, Galvanized | | | | | | |
| Swivel Offset Column Mounting Brackets | | | | | | | |
| VRSBRPR3X | 3" Round Column, Galvanized | | | | | | |
| VRSBRPR4X | 4" Round Column, Galvanized | | | | | | |
| VRSBRSQ6X | 6" Square Column, Painted | | | | | | |
| In-line Column Mounting Brackets | | | | | | | |
| VRSBRP3 | 3"-3½" Round Column, Black Powder Coat & Galvanized | | | | | | |
| VRSBRP4 | 4"-4½" Round Column, Black Powder Coat & Galvanized | | | | | | |
| VRSBRP4SQ | 3½" Square Column, Black Powder Coat & Galvanized | | | | | | |
| VRSBRP5 | 5"-5½" Round Column, Black Powder Coat & Galvanized | | | | | | |
| VRSBRP6 | 6"-6½" Round Column, Black Powder Coat & Galvanized | | | | | | |
| Chain Suspending Kit | | | | | | | |
| HK211 | (3) 72" of Chain, w/Fan to Chain Assembly Hardware | | | | | | |

| Part# | Size | Ph | Spd | Thrust CFM | Thrust CFM/ Watt | Drive | Prop |
|----------------|------|----|-----|---------------|------------------------|-------|-------|
| Single Phase | | | | | | | |
| VPX50GV31011 | 50" | 1 | 1 | 22,300 | 21.1 | Belt | 3-Glv |
| VPX50GV61011 | 50" | 1 | 1 | 22,500 | 20.2 | Belt | 6-Glv |
| VPX50CA31011 | 50" | 1 | 1 | 23,200 | 21.7 | Belt | 3-CA |
| VPX50CA31011-E | 50" | 1 | 1 | 22,000 | 23.8 | Belt | 3-CA |
| VPX50GV61011-E | 50" | 1 | 1 | 21,200 | 24.3 | Belt | 6-Glv |
| VPX50GV31012 | 50" | 1 | 2 | 22,700 | 22.4 | Belt | 3-Glv |
| | | | | 15,200 | 30.1 | | |
| VPX50CA31012 | 50" | 1 | 2 | 22,600 | 21.4 | Belt | 3-CA |
| | | | | 15,100 | 29.0 | | |
| VPX55GV31511-E | 55" | 1 | 1 | 29,700 | 20.6 | Belt | 3-Glv |
| VPX55CA31511 | 55" | 1 | 1 | 29,100 | 20.4 | Belt | 3-CA |
| VPX55CA31511-E | 55" | 1 | 1 | 27,400 | 22.7 | Belt | 3-CA |
| VPX55GV51511 | 55" | 1 | 1 | 29,200 | 21.2 | Belt | 5-Glv |
| VPX55CA32011 | 55" | 1 | 1 | 30,400 | 17.3 | Belt | 3-CA |
| VPX55GV32011 | 55" | 1 | 1 | 29,200 | 20.5 | Belt | 3-Glv |
| VPX55GV52011 | 55" | 1 | 1 | 29,500 | 19.1 | Belt | 5-Glv |
| VPX60GV32011 | 60" | 1 | 1 | 37,500 | 17.7 | Belt | 3-Glv |
| VPX60GV32011-E | 60" | 1 | 1 | 31,600 | 23.9 | Belt | 3-Glv |
| Three Phase | | | | | | | |
| VPX50GV31031 | 50" | 3 | 1 | 22,200 | 20.7 | Belt | 3-Glv |
| VPX50GV31031-E | 50" | 3 | 1 | 21,200 | 24.9 | Belt | 3-Glv |
| VPX50GV61031 | 50" | 3 | 1 | 22,300 | 21.2 | Belt | 6-Glv |
| VPX50GV61031-E | 50" | 3 | 1 | 20,900 | 24.3 | Belt | 6-Glv |
| VPX50CA31031 | 50" | 3 | 1 | 23,000 | 22.2 | Belt | 3-CA |
| VPX50GV31531 | 50" | 3 | 1 | 21,600 | 23.3 | Belt | 3-Glv |
| VPX55CA31531 | 55" | 3 | 1 | 28,600 | 20.8 | Belt | 3-Glv |
| VPX55CA31531-E | 55" | 3 | 1 | 27,400 | 23.2 | Belt | 3-CA |
| VPX55GV31531 | 55" | 3 | 1 | 29,900 | 21.1 | Belt | 3-Glv |
| VPX55GV51531 | 55" | 3 | 1 | 29,100 | 21.8 | Belt | 5-Glv |
| VPX55CA32031 | 55" | 3 | 1 | 29,600 | 20.4 | Belt | 3-CA |
| VPX55CA32031-E | 55" | 3 | 1 | 28,000 | 23.0 | Belt | 3-CA |
| VPX55GV32031 | 55" | 3 | 1 | 30,600 | 21.4 | Belt | 3-Glv |
| VPX55GV32031-H | 55" | 3 | 1 | 31,400 | 16.9 | Belt | 3-Glv |
| VPX55GV52031 | 55" | 3 | 1 | 29,000 | 22.0 | Belt | 5-Glv |
| VPX60GV32031 | 60" | 3 | 1 | 39,500 | 17.8 | Belt | 3-Glv |
| VPX60GV32031-E | 60" | 3 | 1 | 34,500 | 23.7 | Belt | 3-Glv |

Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 230-12

OSHA requires these fans to be mounted a minimum of 7' above the floor

34

▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Due to our continual effort to provide the best products available and adhere to market conditions; literature, products, prices and availability are subject to change without notice.

www.jdmfg.com | jdmfg@jdmfg.com | P:1-800-998-2398 | F:1-888-972-4454