


## "Z" & GALVANIZED V-FAN SERIES 36" SLANT WALL DIRECT DRIVE V-FANS

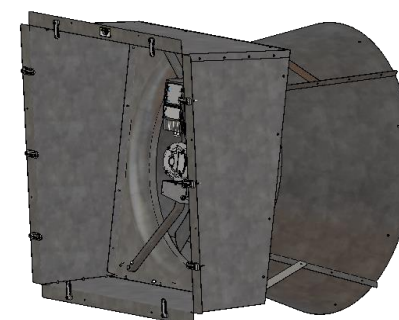

### HOW TO ORDER

To order a complete 36" fan, select one each **FAN**, and one each **SHUTTER**.

### GALVANIZED BLADE

Catalog Number	Housing	Blade	Motor Mount	Motor	Input Electric			BESS #	Blade Speed	Performance Numbers tested at 230v, 60Hz with Aluminum Shutters							Ship Weight	
					Phase	Hertz	Volts			@ .00" SP	@ .05" SP	@ .10" SP	@ .15" SP	@ .20" SP	@ .25" SP	@ .30" SP		
										RPM	CFM	CFM	CFM	CFM	CFM	CFM		CFM
936260-1	Galvanized	Galvanized	Galvanized	.75 HP	Single Phase	60 Hz / 50 Hz	200-240 Volts	4.95 Amps @ .30" SP	20202	912	11,860	11,370	10,830	10,230	9,590	8,940	8,040	189
76										26.5	23.6	21.1	18.7	16.5	14.7	12.2	86	
936260-1-Q2	Galvanized	Galvanized	Galvanized	.75 HP	Single Phase	60 Hz / 50 Hz	200-240 Volts	4.95 Amps @ .30" SP	20202	780	10,320	9,710	8,990	8,250	7,310	5,480	4,310	363
65										34.3	29.7	25.2	21.5	17.7	12.0	8.5	165	
936260-ZM-1	Z Material	Galvanized	Galvanized	.75 HP	Single Phase	60 Hz / 50 Hz	200-240 Volts	4.95 Amps @ .30" SP	20202	660	8,780	8,010	7,100	5,960	3,780	2,550	800	189
55										44.5	36.1	28.8	22.1	11.8	7.1	2.2	86	
936260-ZM-1-Q2	Z Material	Galvanized	Galvanized	.75 HP	Single Phase	60 Hz / 50 Hz	200-240 Volts	4.95 Amps @ .30" SP	20202	540	7,100	6,110	4,580	2,100				363
45										56.8	43.0	27.6	10.2				165	
936260-3	Galvanized	Galvanized	Galvanized	.75 HP	Three Phase	60 Hz / 50 Hz	200-240 Volts	2.53 Amps @ .30" SP	20199	912	11,830	11,340	10,790	10,210	9,530	8,870	7,960	189
76										27.0	23.9	21.2	18.8	16.6	14.7	12.5	86	
936260-3-Q2	Galvanized	Galvanized	Galvanized	.75 HP	Three Phase	60 Hz / 50 Hz	200-240 Volts	2.53 Amps @ .30" SP	20199	780	10,340	9,720	8,990	8,200	7,290	5,360	4,140	363
65										34.9	30.1	25.6	21.2	18.1	11.8	8.2	165	
936260-3-KD	Z Material	Galvanized	Galvanized	.75 HP	Three Phase	60 Hz / 50 Hz	200-240 Volts	2.53 Amps @ .30" SP	20199	660	8,810	8,060	7,110	5,860	3,810	2,510	1,270	146
55										45.6	37.0	28.9	22.3	12.0	7.0	3.2	66	
936260-ZM-3	Z Material	Galvanized	Galvanized	.75 HP	Three Phase	60 Hz / 50 Hz	200-240 Volts	2.53 Amps @ .30" SP	20199	540	7,110	6,110	4,380	2,060				189
45										58.2	44.0	27.4	9.8				86	
936260-ZM-3-Q2	Z Material	Galvanized	Galvanized	.75 HP	Three Phase	60 Hz / 50 Hz	200-240 Volts	2.53 Amps @ .30" SP	20199									363
																		165

\* Z Protective coating used for the fan orifice, housing, and cone. 7 year rust through warranty on housings (Poultry Application).

Q2 - Quantity of 2 fans shipped together assembled to save space and money (requires 2 shutters)

### 36" SHUTTERS

CATALOG NUMBER	ITEM DESCRIPTION	OUTSIDE DIMENSIONS HEIGHT x WIDTH	SHUTTER DIMENSIONS HEIGHT X WIDTH	SHIP WEIGHT	
				LBS.	KGS
SPM36W	36" Shutter - White PVC	45.5" x 45.5"	43" x 43"	16.0	7.3
SPM36B	36" Shutter - Black PVC	45.5" x 45.5"	43" x 43"	16.0	7.3
SPM36A	36" Shutter - Aluminum	45." x 45."	42" x 42"	20.0	9.1