

## 48" Direct Drive Exhaust Fan with Shutter



### APPLICATION


This air movement system is designed for the demanding environment of a crypto-mining shipping container. Specifically engineered with a shallow mounting depth, higher HP motor, and integrated exhaust shutter, these units exhaust a high volume of air to keep your miners cool. This is an all-in-one solution, complete with mounting box, gravity operated exhaust shutter, and flush-mounted rear guard.

### SPECS & DETAILS

- 3 HP, 1170 RPM, Maintenance Free Direct Drive TEFC Motor, Inverter Duty
- 3 Phase, 60Hz, 230V/460V (able to run on 415V 60hz)
- 20,000 CFM @ 0.5" WG
- 77 dBA @ 5'
- All aluminum heavy duty gravity operated exhaust shutter
- Designed and built in the USA

### OPTIONAL ACCESSORIES

- 54" filtered supply air, mounting box and intake shutter (passive supply)
- 48" 20,000 CFM supply fan with 54" filter section (active supply)
- Exhaust and intake exterior weather hoods and/or shutter bird screens
- VFD for speed control and phase converters for adapting to nearly any power source

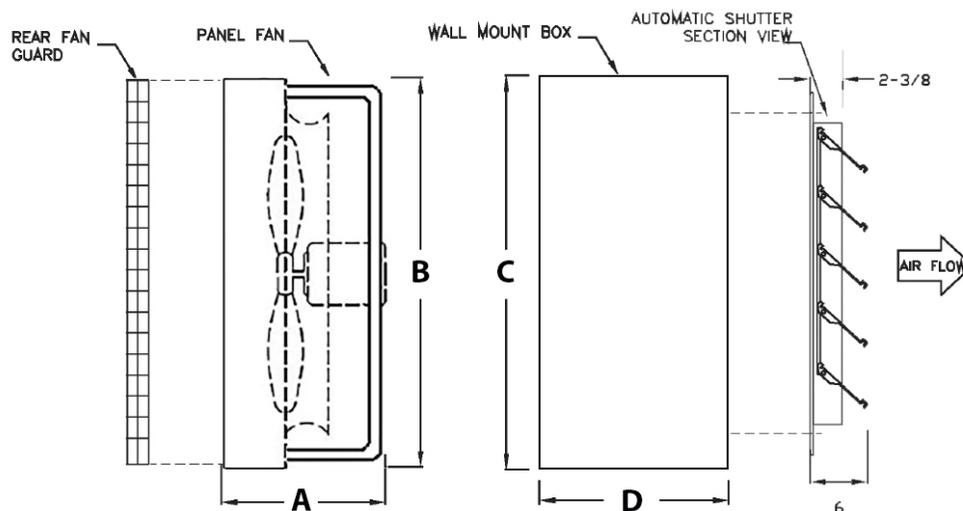

Model #	A	B	C	D	Rough-In Opening	Fan Size
NFC48-3	25"	54"	54.25"	25.25"	54.75" Square	48"