




**TABLE 1 - TECHNICAL DATA (60HZ)**

MODEL	OUTPUT (kW)	VOLTAGE (VOLTS)	FREQ. (Hz)	PHASE	CURRENT (AMPS)	AIR FLOW (M <sup>3</sup> /HR)
FE2-220160-126	12.6	220	60	1	57.3	2973
FE2-230160-138	13.8	230			59.9	
FE2-240160-150	15.0	240			62.5	
FE2-440360-168	16.8	440		3	22.0	
FE2-480360-150	15.0	480			18.0	
FE2-480360-200	20.0				24.1	

**NOTES:**

- NET WEIGHT: 76 KG
- SHIPPING WEIGHT: 99 KG
- OPERATING AMBIENT TEMP: -20° TO +40°C
- HAZARDOUS LOCATION CLASSIFICATION: Ex II 2 G Ex d IIB T3 Gb
- TEMPERATURE CLASS: T3 200°C
- AIR DELIVERY: 2973 m<sup>3</sup>/hr @ 21°C (NOMINAL)
- MATERIALS: CABINET: 12 GA. EPOXY POWDER COATED RUFFNECK GREEN

CORE: STEEL WITH INTEGRAL ALUMINUM FINS

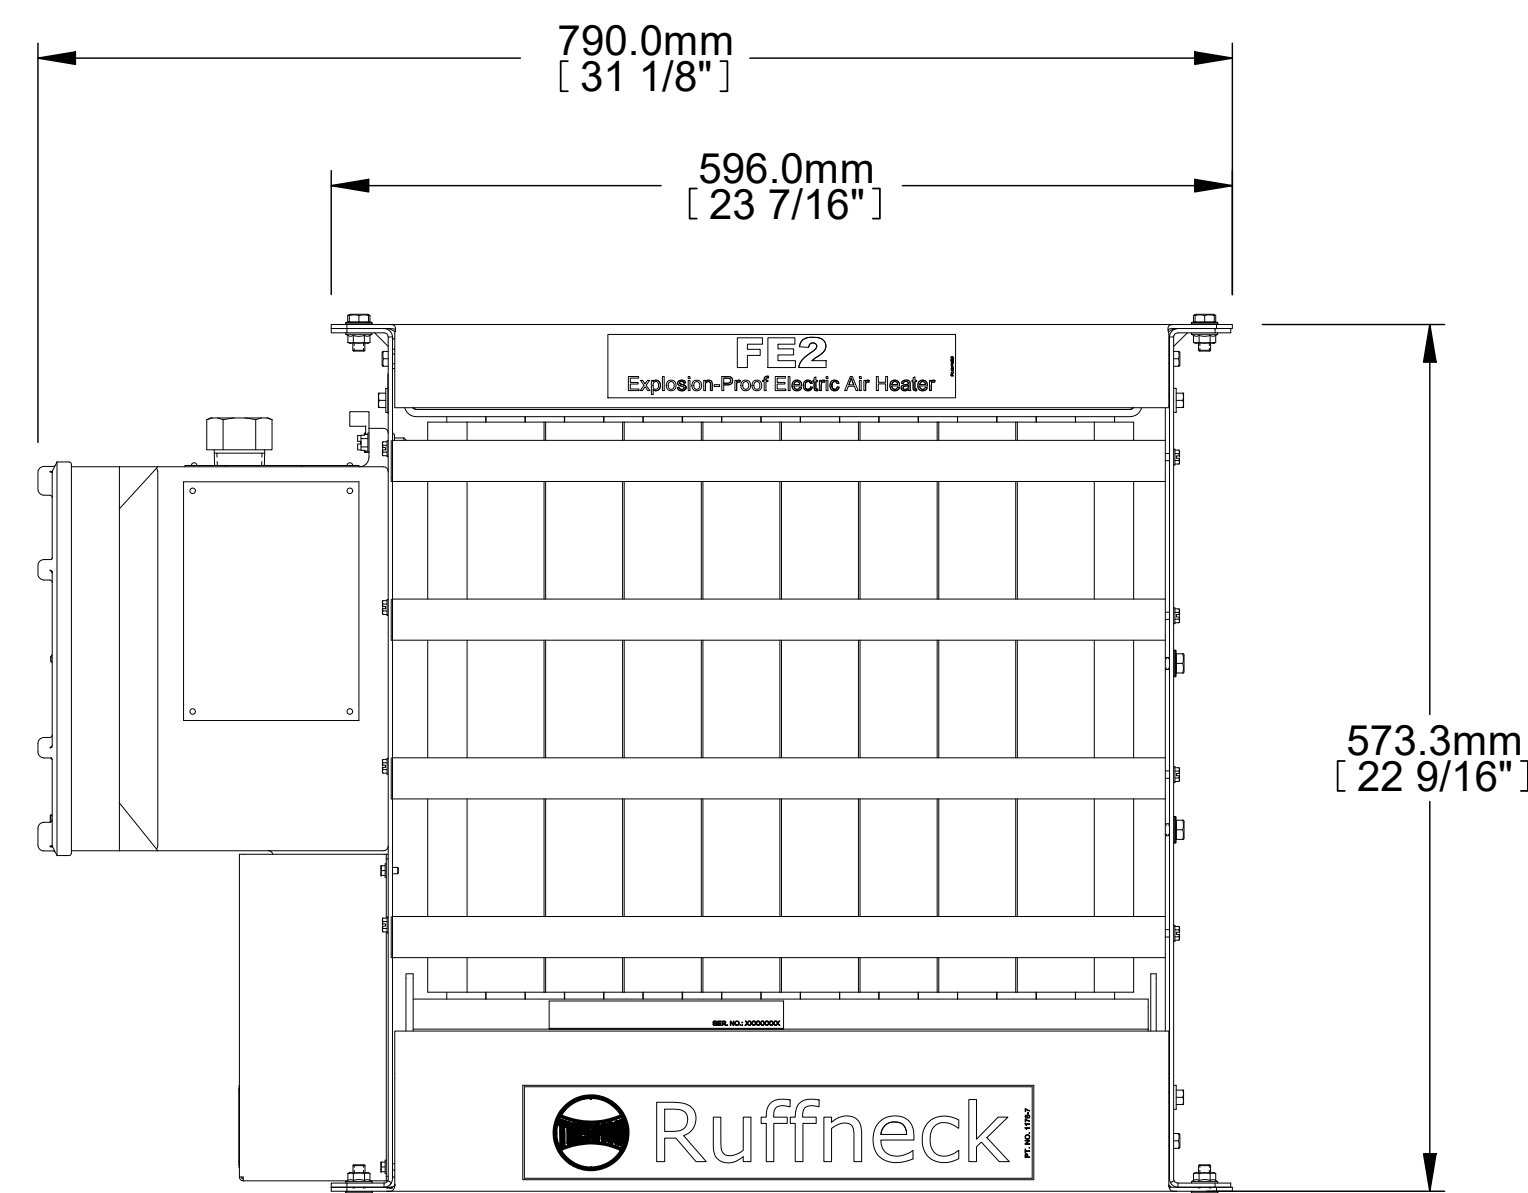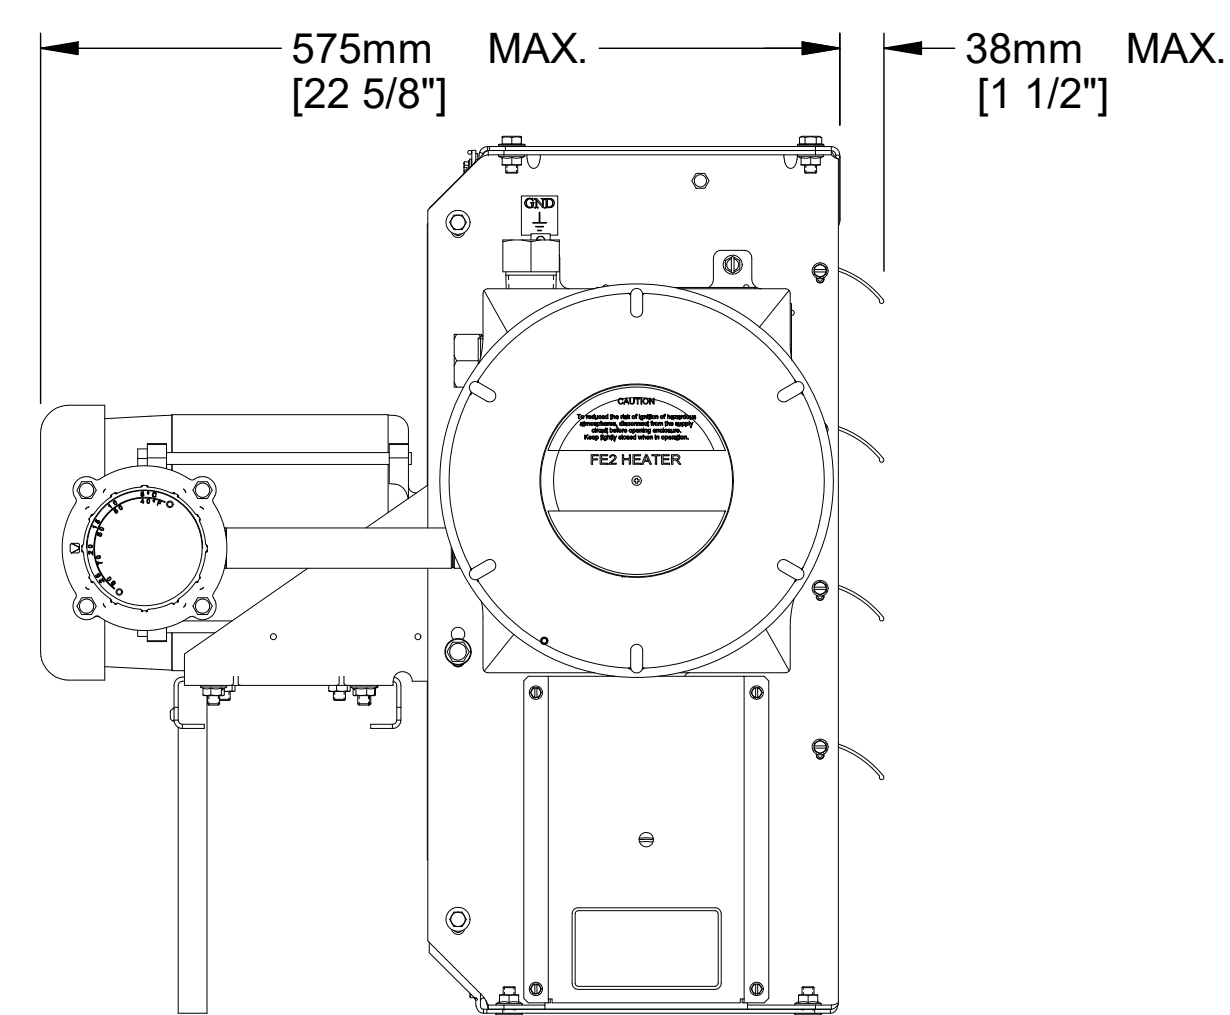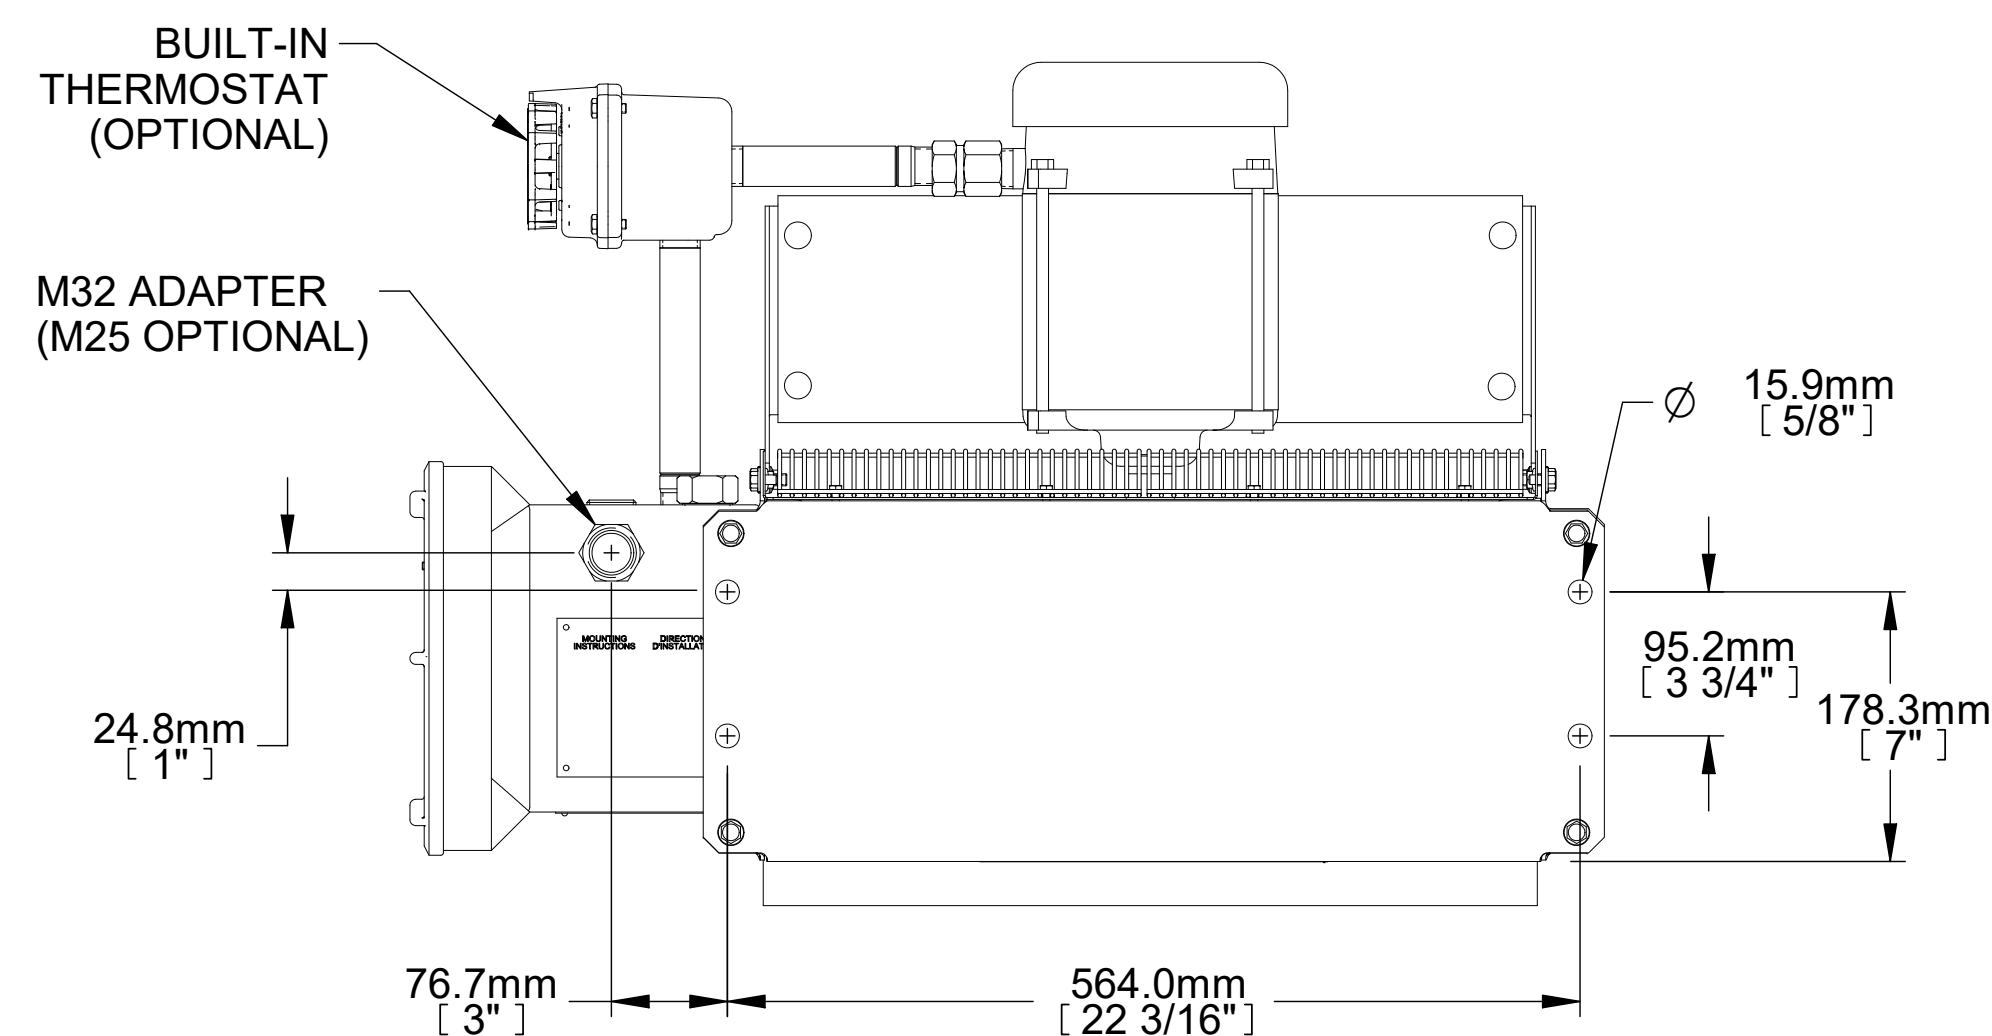

REV.	REVISION DESCRIPTION	DATE	BY
TITLE: FE2 RUFFNECK HEATER DATA SHEET 12.5 - 20.0 kW @ 60 Hz			
DWG NO.: 11525-D SHEET: 2 OF 2		TOLERANCE UNLESS NOTED OTHERWISE	
± 1/2°	± N/A	± 1/8"	± 3 mm
ANGULAR	DECIMAL	FRACTIONAL	METRIC
SCALE: NONE		DRN BY: nsanchez 10 Aug 2010	
CHK'D BY:		APP'D. BY:	

