



Quotation Number :
 Project Name : Industrial Fan Direct
 Item Reference: :

Fan Code : AF-8-F07620-3
 Customer :
 Date: :

Conditions Specified


Volume 380 cfm
 Outlet Pressure 1.00 inwg (static)
 Inlet Pressure 0.00 inwg (static)
 Density 0.075 lb/ft³
 Humidity 50 %
 Operating Temperature 68 °F
 Construction Temperature 0 - 150 °F Standard
 Altitude 0 ft
 Arrt 4 (dDirect)

Fan Selection

Fan Code AF-8-F07620-3
 Volume 376 cfm
 Pressure @ 0.075 lb/ft³ 0.98 inwg (static)
 Pressure @ 0.075 lb/ft³ 0.98 inwg (static)
 Power @ 0.075 lb/ft³ 0.414 HP
 Power @ 0.075 lb/ft³ 0.414 HP
 Fan Speed 3450 rpm
 Max Speed 4600 rpm
 Wheel Tip Speed 6934 fpm
 Max Safe Tip Speed 9245 fpm
 Velocity 5243 fpm
 Static Efficiency 14 %

Motor Selection

Motor Frame 56C
 Enclosure AF Enclosure TEFC
 Efficiency Grade Standard
 Speed 3450 rpm
 Power 0.500 HP
 Full Load 7.2 A
 Locked Rotor 24.5 A
 Electrical Supply 115 Volts 60 Hz 1 Phase

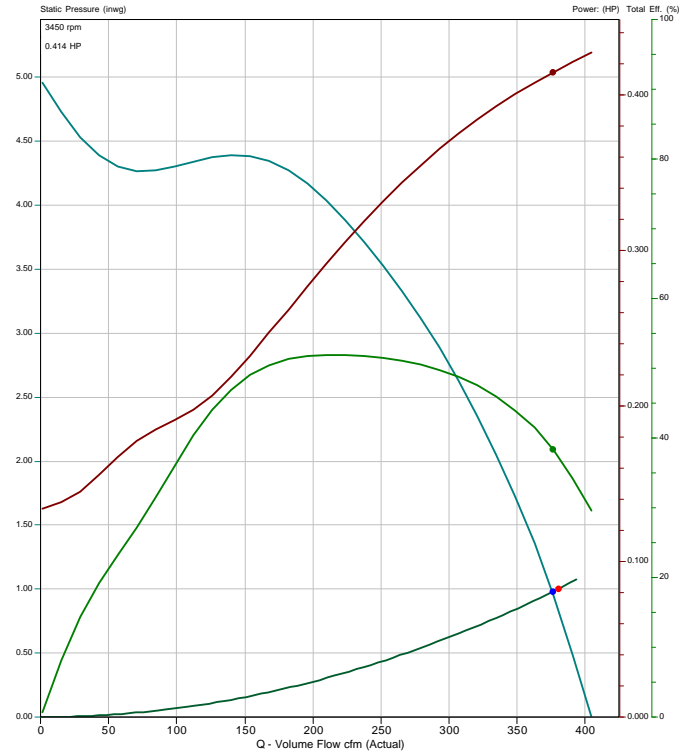

Inlet*	Sound Spectrum (Hz)								Overall	
	63	125	250	500	1k	2k	4k	8k	Lw*	LpA @ 3 ft**
	86	86	96	97	89	88	84	81	101	87

* Lw dB re 10⁻¹² W ** dBA re 2x10⁻⁵ Pa

Terms and Conditions: This offer is made subject to the terms and conditions detailed on the accompanying letter.

Description	Qty
Fan AF-8-F07620-3	1
Fan Accessories	