

## Product Specifications



**MODEL**  
**SFT-1200**

**CATEGORY**  
Exhaust


**DESCRIPTION**  
12" direct-drive shutter fan.

### FEATURES

- Rugged corrosion-proof PVC shutter and powder-coated (over zinc) steel guard.
- Aluminum fan blade.
- Totally enclosed, maintenance free, energy efficient motor.

### DIMENSIONS

A = 14-7/8"    B = 14-7/8"    C = 12-1/8"    D = 12-1/8"  
E = 3"        F = 3-7/8"    G = 1/8"        H = 1-3/4"  
**Rough-in Opening**        12-5/8" x 12-5/8"

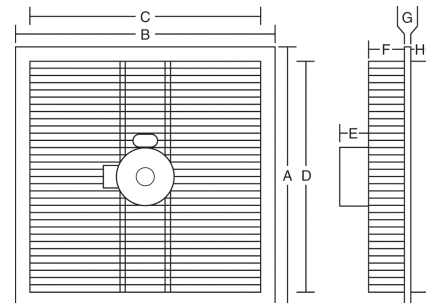

### PERFORMANCE

CFM                760 at 0.05" static pressure  
Test Number    N/A

### MOTOR

CS130            1/30 HP            1 Speed            60 Hz            1 Phase            115 Volts  
Insul = B        AO                1550 RPM        SF = 1            Max 40° C        0.90 Amps

### BLADE

AFB-105SF      5 Wings            5/16" Bore        Aluminum

### SHIPPING

12 lbs            19" x 18" x 10"            UPS = Yes        Pallet Quantity = 24-26



**800-779-3267**

sales@schaefervent.com • www.schaefervent.com

*Test data, performance, energy consumption and other specifications are based on results in a controlled environment.  
Actual results will vary. Product specifications subject to change. ©2015 Schaefer Ventilation Equipment 3-18-15*