

Product Specifications



MODEL
SFT-1600

CATEGORY
Exhaust


DESCRIPTION
16" direct-drive shutter fan.

FEATURES

- Rugged corrosion-proof PVC shutter and powder-coated (over zinc) steel guard.
- Aluminum fan blade.
- Totally enclosed, maintenance free, energy efficient motor.

DIMENSIONS

A = 18-3/4" B = 18-3/4" C = 16" D = 16"
E = 6" F = 4-1/2" G = 1/8" H = 1-3/4"
Rough-in Opening 16-5/8" x 16-5/8"

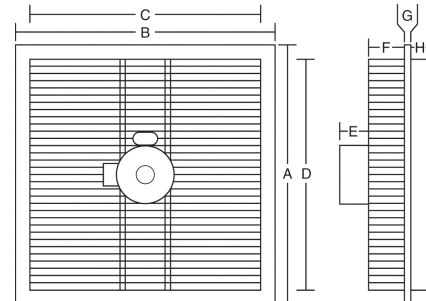

PERFORMANCE

CFM 1250 at 0.05" static pressure
Test Number N/A

MOTOR

CS110	1/10 HP	1 Speed	60 Hz	1 Phase	115/230 Volts	108 Watts
Insul = B	TEAO	1725 RPM	SF = 1	Max 40° C	1.3/0.65 Amps	

BLADE

AFB-144SF	4 Wings	1/2" Bore	Aluminum
-----------	---------	-----------	----------

SHIPPING

21 lbs	22" x 22" x 14"	UPS = Yes	Pallet Quantity = 20
--------	-----------------	-----------	----------------------



800-779-3267

sales@schaefervent.com • www.schaefervent.com

Test data, performance, energy consumption and other specifications are based on results in a controlled environment. Actual results will vary. Product specifications subject to change. ©2011 Schaefer Ventilation Equipment 11-1-11