


Heavy Duty Industrial Basket Fan with 2 & 3-Speed High-Efficiency Motors

The J&D Heavy Duty Industrial Basket Fan sets the standard in air performance. This fan was designed for the industrial market and provides the performance that is mandatory for machine efficiency and employee comfort.

No electrician needed!
**Hang it up
Plug it in**

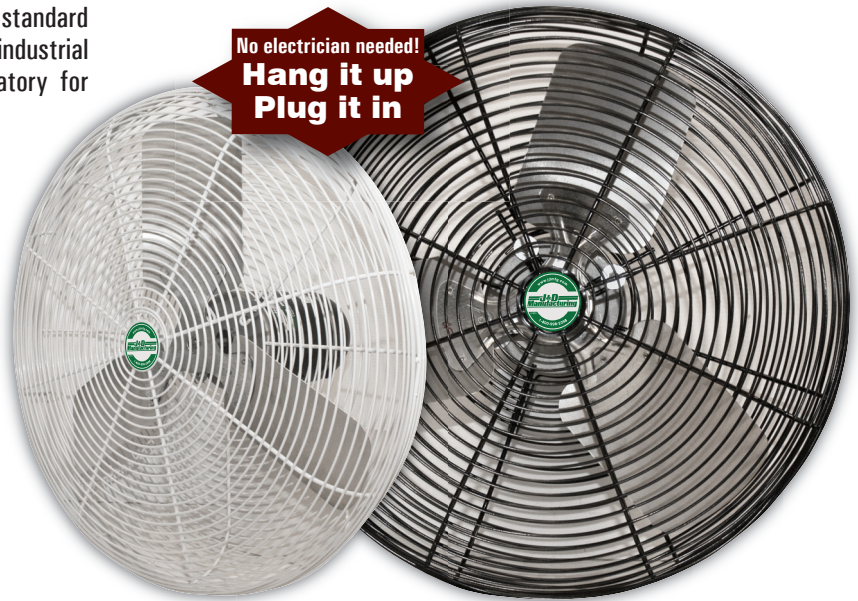


Features

- 2-speed non-oscillating and 3-speed oscillating high-efficiency motor with pull chain
- Attached cord with 3-prong plug pre-wired for 115 Volts
- Direct drive - no belts or pulleys to maintain
- 20" and 24" models with a ¼ HP motor are available in black or white
- 30" oscillating model with a powerful ½ HP motor is available in black
- Oscillating models feature 80° pivot range
- Heavy gauge, corrosion resistant powder coated guards
- Guards meet OSHA 1910.212(a)(5) requirements allowing this fan to be installed at any height
- Totally enclosed, maintenance-free, high-efficiency motors feature sealed ball bearings and are covered by a **2 Year Warranty**
- Compatible with our misting/fogging product line
- Optional wall or post mount brackets

MOUNTING BRACKETS ARE NOT INCLUDED

Select from the recommended brackets below to fit your installation needs.

Part #	Description	Powder Coated Black	Hot Dip Galv.
Side Mount Brackets			
VRSBR14	42" Extended Bracket, fits Sq. or Round Up Post	X	
VRSBR143	42" Extended Bracket, fits 3" Tube - Bolt On	X	
VRSBR144	42" Extended Bracket, fits 4" Tube - Bolt On	X	
VRSBR14412	42" Extended Bracket, 4½" Tube - Bolt On	X	
VRSBR901-HDG	Wall Mount Bracket		X



Shown:
VRSBR901-HDG wall mount bracket with oscillating fan

Part#	Size	Ph	Spd	Thrust CFM	Thrust Watt	Drive	Prop
Single Phase							
Non-Oscillating Black Models							
VDF20HOB2	20"	1	2(H) (L)	2,550 1,900	13.3 12.7	Direct	3-Alm
VDF24HOB2	24"	1	2(H) (L)	3,700 2,050	15.5 13.0	Direct	3-Alm
Non-Oscillating White Models							
VDF20HOW2	20"	1	2(H) (L)	2,550 1,900	13.3 12.7	Direct	3-Alm
* VDF24HOW2	24"	1	2(H) (L)	3,700 2,050	15.5 13.0	Direct	3-Alm
Oscillating Black Models							
VDF201HOB2	20"	1	3(H) (M) (L)	2,340 2,280 2,250	13.0 20.4 23.2	Direct	3-Alm
VDF241HOB2	24"	1	3(H) (M) (L)	3,820 3,350 3,050	15.7 20.2 21.5	Direct	3-Alm
VDF301HOB2	30"	1	3(H) (M) (L)	6,520 6,060 4,970	14.0 14.9 13.2	Direct	3-Alm
Oscillating White Models							
VDF201HOW2	20"	1	3(H) (M) (L)	2,340 2,280 2,250	13.0 20.4 23.2	Direct	3-Alm
VDF241HOW2	24"	1	3(H) (M) (L)	3,820 3,350 3,050	15.7 20.2 21.5	Direct	3-Alm

* Best sellers/recommended models

Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 230-12

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.