

MOISTURE RESISTANT WALL MOUNT FANS

ECONOMICAL • HIGH VELOCITY

SPECIFICATIONS

Model	Size	Spd	HP	RPM		CFM @ .0 SP		CFM/Watt	AMPS		Drive	Blade	Cord	Color
				Hi/Med/Lo	HZ	Hi/Med/Lo	Hi/Med/Lo	Volts	Hi/Med/Lo					
HVW-18M	18"	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	120	1.45/1.35/1.27	DD 3-White	12'	White		
HVW-18MB	18"	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	120	1.45/1.35/1.27	DD 3-Black	12'	Black		
HVW-18M-OS	18"	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	120	1.45/1.35/1.27	DD 3-White	12'	White		
HVW-18MB-OS	18"	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	120	1.45/1.35/1.27	DD 3-Black	12'	Black		

FEATURES AND BENEFITS

- High velocity air movement
- Constructed with high-grade steel
- Factory balanced powder coated white or black aluminum blades
- Moisture Resistant or *optional UL507 (Special Order only) tested and rated for use with misting and fogging rings for indoor and outdoor use.*
- Fan head tilt able to 105 degrees
- Powder coated white or black finish for excellent corrosion resistance
- Three speed with pull chain.
- Motor completely sealed and permanently lubricated ball bearings with thermal overload protection.
- Adjustable wall mount bracket pivots up to 180 degrees
- Also available in Open Guard Style, Non-OSHA (-OS)
- Some assembly required
- **Three year warranty on Motor and one year limited warranty on all other parts.**



ADDITIONAL INFORMATION

Model	Size	Wt/lbs	LxWxH	Feet	Total Cube		Color
					Container	Qty/ 40' HC	
HVW-18M	18"	20.3	21.9 x 8.8 x 21.5"	2.4		1040	White
HVW-18MB	18"	20.3	21.9 x 8.8 x 21.5"	2.4		1040	Black
HVW-18M-OS	18"	20.3	21.9 x 8.8 x 21.5"	2.4		1040	White
HVW-18MB-OS	18"	20.3	21.9 x 8.8 x 21.5"	2.4		1040	Black



Contact us for our complete line of ventilation products including exhaust fans, temperature controls, lighting, curtain inlet and walls, cooling, polycarbonate panels, gates, headlocks, stalls, steel and rubber flooring.



Welcome to the next generation of ventilation!

MOISTURE RESISTANT WALL MOUNT/PEDESTAL FANS

ECONOMICAL • HIGH VELOCITY • EASY TO MOVE
SPECIFICATIONS



Model	Size	Spd	HP	Hi/Med/Lo	HZ	Hi/Med/Lo	Volts	Hi/Med/Lo	Drive	Blade	Cord	Color	Style
				RPM			CFM @ .0 SP	CFM/Watt @ .0 SP			AMPS		
HVW-24M	24"	3	1/4	1110/918/740	60	10247/8953/5825	33/30/27	120 2.36/1.815/1.601	DD	3-White	18'	White	Wall
HVP-24M	24"	3	1/4	1110/918/740	60	9157/7326/5860	33/30/27	120 2.45/1.85/1.37	DD	3-White	9'	White	Pedestal
HVW-30M	30"	3	1/4	1113/915/754	60	9541/8445/5664	37/33/30	120 2.3996/1.815/1.681	DD	3-White	18'	White	Wall
HVP-30M	30"	3	1/4	1113/915/754	60	10418/8334/6668	37/33/30	120 2.2/1.58/1.36	DD	3-White	9'	White	Pedestal
Oscillating Models													
OSCW-24M	24"	3	1/4	1110/918/740	60	9157/7326/5860	33/30/27	120 2.36/1.815/1.601	DD	3-White	18'	White	Wall
OSCP-24M	24"	3	1/4	1580/1240/830	60	10241/8200/6554	35/32/28	120 2.45/1.85/1.37	DD	3-White	9'	White	Pedestal
OSCW-30M	30"	3	1/4	1113/915/754	60	10418/8334/6668	37/33/30	120 2.3996/1.815/1.681	DD	3-White	18'	White	Wall
OSCP-30M	30"	3	1/4	1100/1035/980	60	9535/7628/6102	43/39/35	120 1.91/1.6/1.58	DD	3-White	9'	White	Pedestal

*All models available in Black finish.

FEATURES AND BENEFITS

- Available in 24" and 30" sizes
- High velocity air movement
- Constructed with high-grade steel
- Factory balanced powder coated white aluminum blades
- Moisture Resistant or *optional UL507 (Special Order only) tested and rated for use with misting and fogging rings for indoor and outdoor use*
- Fan head tiltable to 105 degrees
- Oscillating fan head can be rotated up to 80 degrees or be in a fixed position
- Powder coated white guard, blade, base and pole for corrosion resistance
- Three speed with pull chain.
- Motor completely sealed and permanently lubricated ball bearings with thermal overload protection.
- Adjustable wall mount bracket pivots up to 140 degrees
- Some assembly required
- One year warranty
- Available in black

ADDITIONAL PEDESTAL INFORMATION

- Adjustable height chrome plated extension pipe
- Height adjustment for 24" from 58" to 74"
- Height adjustment for 30" from 61" to 77"




24"



30"



24"

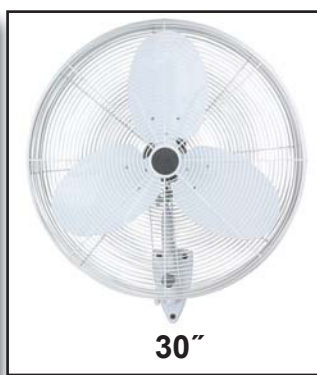

30"

ADDITIONAL INFORMATION

Model	Size	Wt/lbs	LxWxH	Cube	Container	Total Cube	Qty/ 40' HC
HVW-24M	24"	42.32	28.7 x 7.5 x 39.0"	4.84		4.84	490
HVP-24M	24"	79.20	32.3 x 10.8 x 35.4"	7.167		7.167	326
HVW-30M	30"	50.70	35.0 x 7.5 x 44.9"	6.80		6.80	380
HVP-30M	30"	72.82	34.6 x 10.8 x 41.3"	8.973		8.973	264
Oscillating Models							
OSCW-24M	24"	45.41	28.7 X 7.5 X 40.9"	5.09		5.09	490
OSCP-24M	24"	81.57	32.3 x 10.8 x 40.2"	8.12		8.12	284
OSCW-30M	30"	53.79	35.0 X 7.5 X 46.5"	7.04		7.04	380
OSCP-30M	30"	81.57	34.6 x 10.8 x 45.9"	9.95		9.95	238

Contact us for our complete line of ventilation products including exhaust fans, temperature controls, lighting, curtain inlet and walls, cooling, polycarbonate panels, gates, headlocks, stalls, steel and rubber flooring.

VES ENVIRONMENTAL SOLUTIONS, LLC.
8296 Commerce Pkwy, Chippewa Falls, WI 54729 USA
www.vesenviro.com

Tel.: (888) 622-2999
Fax: (715) 720-0801
info@vesenviro.com