

## HIGH PERFORMANCE • LOW MAINTENANCE • EASY INSTALLATION


CANARM'S "TF" SERIES STAINLESS STEEL CIRCULATING PANEL FANS ARE DESIGNED FOR USE AS AIR TUBE CIRCULATORS, EXHAUST OR CIRCULATING FANS FOR HOG, POULTRY, DAIRY AND GREENHOUSES

Canarm's "TF" Series Stainless Steel Circulating Panel Fans are designed for use in many applications. Four pre-punched mounting holes make the "TF" series fans easy to hang from chains or for permanent installation as a sidewall exhaust fan or intake fan.

The "TF" series stainless steel fan is ideally suited for use in recirculating ducts or air bags. An extension on the venturi is designed to make Air Bag attachment quick and easy.

## FEATURES

- Available in 12", 16", 24" and 36" sizes.
- Dual voltage, totally enclosed, variable speed (except for 36"), high efficiency ball bearing motors with thermal overload protection.
- Canarm's exclusive "Rotair" air foil polypropylene blade is designed to deliver high volumes of air quietly and efficiently.
- The single speed 36" model has a high performance galvanized blade.
- Stainless steel panel will not rust and has an 4" extension to allow the installation of an air bag.
- All fans are shipped completely assembled.

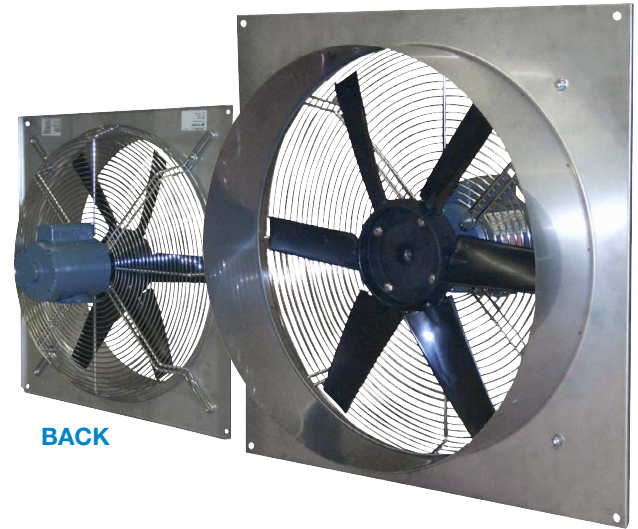

BACK


FRONT

**WARRANTY: 1 YEAR ON FAN.**

## PERFORMANCE DATA & SPECIFICATIONS

MODEL	FAN DIA.	MOTOR H.P.	MOTOR TYPE	FAN RPM	CURRENT LOAD		AIRFLOW CAPACITY - CFM			CFM/WATT	FRAMING DIMENSIONS	SHIPPING WGT. LBS.
					@115V	@230V	0" SP	.05" SP	.10" SP			
TF12	12"	1/4	High Efficiency Variable Speed Dual Voltage	1750	2.6	1.3	1,380	1,260	1,170	7.5	15 x 15	24
TF16	16"	1/4		1750	3.4	1.7	2,810	2,680	2,540	8.0	19 x 19	27
TF24	24"	1/2		1750	5.0	2.5	5,000	4,700	4,400	9.0	27 x 27	40
TF36	36"	1/2	Single	850	6.0	3.0	11,000	10,500	10,000	20.0	37 x 37	40

## DIMENSIONS

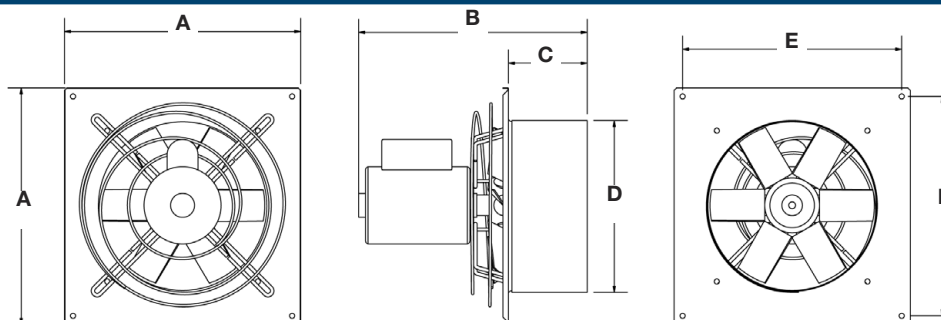

FAN	A	B	C	D	E
TF12	17.250	16.750	5.750	12.500	16.000
TF16	21.250	16.750	5.750	16.500	20.000
TF24	29.250	16.750	5.750	24.625	28.000
TF36	38.875	12.500	3.625	36.750	37.500