
DB25 Connection Guide

This is a quick instruction guide with photos on how to connect your brand new DB25 Expander to your WMD Performance Mixer System.


For use without PM-Channels



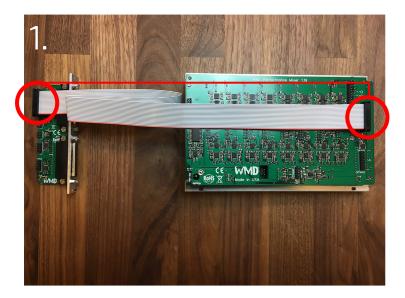

First, connect the far-right 20 pin connector on the Performance Mixer to the 20 pin header on the very top of the DB25 expander with the included 20 pin ribbon cable.

Red Stripe towards the bottom of both modules.

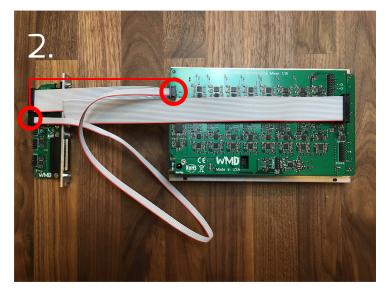


Next, connect the top-most, far-left 6 pin header on the PM to the 6 pin header on the DB25 expander directly below with the included 6 pin ribbon cable.

Red Stripe toward the bottom of both modules.

IMPORTANT NOTICE: Every PM Module needs power. Make sure to plug your included 16-to-10 pin power cable from the header labeled POWER on the module to your power supply. -12V to the Red Stripe.

For use with PM-Channels

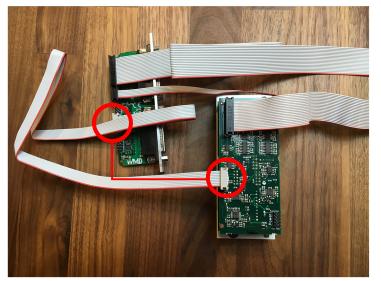

To connect Performance Mixer and PM Channels, repeat the two steps above, connecting the PM to the DB25 expander.

Next, connect the included 10 pin cable from the left-most, middle header on the Channels to the 10 pin header on the DB25 that is second from the bottom. Both will be labeled accordingly.



This is what it will look like when all three modules are connected together (sans power of course).

* The cables are super long so you can put the DB 25 expander anywhere in your system that is convenient.

Red Stripe toward the bottom of both modules.