

A Series 3000–3500 kg



Features

- Polyurethane (PU) on cast iron wheel
- Swivel or fixed plate zinc forks with or without wheel brake or direction lock
- Kingpinless construction

Wheels



AUQ
PU on cast iron, precision bearing

| Wheel | Max load (kg) | Diameter x tread (mm) | Hub x bore (mm) |
|--------|---------------|-----------------------|-----------------|
| AUQ200 | 3000 | 200 x 102 | 109 x 30 |
| AUQ250 | 3500 | 250 x 102 | 109 x 30 |


Forks



AZP Plate with swivel
AZPBR Plate with swivel and wheel brake
AZPDL Plate with swivel and direction lock
AZF Fixed plate, no swivel

| Forks | Wheel size | Mount height (mm) | Turning radius (mm) |
|--------------------|------------|-------------------|---------------------|
| AZP/AZPDL/ AZF* | 200 | 279 | 172 |
| | 250 | 330 | 197 |
| AZPBR | 200 | 279 | 317 |
| | 250 | 330 | 353 |

Fork mount

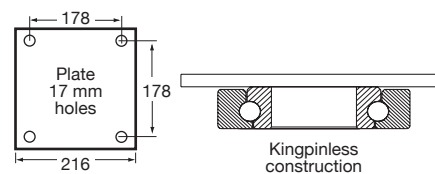

* AZF—fixed plate has no turning radius.

Order codes

| Wheel code | Castor code |
|-----------------------------------|--------------|
| AUQ200 Diameter: 200 mm | AUQ200/AZP |
| | AUQ200/AZF |
| | AUQ200/AZPBR |
| | AUQ200/AZPDL |
| AUQ250 Diameter: 250 mm | AUQ250/AZP |
| | AUQ250/AZF |
| | AUQ250/AZPBR |
| | AUQ250/AZPDL |