

Y Series 50–180 kg



Steel rim wheels



YPRIB200
Puncture-proof grey tyre, precision bearing



YPLUG250/YSLUG250
Puncture-proof or pneumatic black tyre, deep groove ball bearing



YPSTR350/YSSTR350
Puncture-proof or pneumatic black tyre, precision bearing

Polypropylene rim wheels



YRIB200
Grey tyre, precision bearing



YLUG250
Black tyre, deep groove ball bearing



YLGG250
Grey tyre, deep groove ball bearing



YSTR350
Black tyre, precision bearing

Specifications

Wheel	Type	Max load (kg)	Diameter x tread (mm)
YPRIB200	Puncture-proof	50	200 x 50
YPLUG250	Puncture-proof	75	220 x 54
YPSTR350	Puncture-proof	100	265 x 70
YSLUG250	Pneumatic	120	220 x 54
YSSTR350	Pneumatic	180	265 x 70
YRIB200	Pneumatic	75	200 x 50
YLUG250	Pneumatic	100	220 x 54
YLGG250	Pneumatic	100	220 x 54
YSTR350	Pneumatic	140	265 x 70

Features

- Available with puncture-proof neoprene tyres on steel rims or traditional pneumatic neoprene tyres on steel or polypropylene rims, in non-marking grey or black
- Swivel or fixed plate zinc plated forks

Forks




YZP
Plate with swivel



YZF
Fixed plate,
no swivel

Forks	Nominal size	Mount height (mm)	Turning radius (mm)
YZP/YZF*	200	238	155
	250	250	200
	350	320	223

Fork mounts

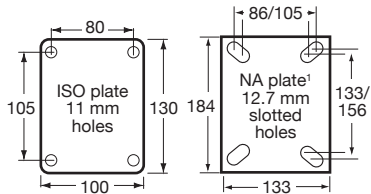

* YZF fixed fork has no turning radius.

¹ North American plate. Add **N** at the end of fork code to purchase (e.g. YRIB200/YZPN).

Order codes

Wheel code	Fork code	Castor code
YPRIB200	Y200ZP	YPRIB200/YZP
	Y200ZF	YPRIB200/YZF
YPLGG250	Y250ZP	YPLGG250/YZP
	Y250ZF	YPLGG250/YZF
YPLUG250	Y250ZP	YPLUG250/YZP
	Y250ZF	YPLUG250/YZF
YPSTR350	Y350ZP	YPSTR350/YZP
	Y350ZF	YPSTR350/YZF
YSLUG250	Y250ZP	YSLUG250/YZP
	Y250ZF	YSLUG250/YZF
YSSTR350	Y350ZP	YSSTR350/YZP
	Y350ZF	YSSTR350/YZF
YRIB200	Y200ZP	YRIB200/YZP
	Y200ZF	YRIB200/YZF
YLG250	Y250ZP	YLG250/YZP
	Y250ZF	YLG250/YZF
YLUG250	Y250ZP	YLUG250/YZP
	Y250ZF	YLUG250/YZF
YSTR350	Y350ZP	YSTR350/YZP
	Y350ZF	YSTR350/YZF