



Thank you for purchasing the Heated Grip-C type Switch (With Thumb Heater). Before installing, please read the instruction carefully and keep it for future reference.

⚠ Notice

1. For installation, please follow the steps described in manual. Any damage caused by wrong installation shall be imputed to the users.
2. Do not disassemble or change any parts excluding the manual description.
3. The interior examination or maintenance should be executed by our professionals.

MARK MEANING:

















NOTE You could get the installation details from the information behind the mark.

⚠ Some processes must be followed to avoid the affection caused by wrong installation.

⚠ WARNING! Some processes must be followed to avoid damages to yourself or the public.


⚠ CAUTION! Some processes must be followed to avoid the damage to the vehicle.

1 Accessory

1 Hot grip x2 	2 Heater switch x1 	3 The connecting wire x1 	4 Thumb heater X1 
5 Handle bar bracket X1 	6 Rubber X1 	7 M6 x 16 Screw X1 	8 M6 Nut X1 
9 M6 washer X1 	10 M3 x 10 screw X2 	11 Heat shrink tube X1 	12 Foam X1 
13 Abrasive paper X1 	14 3M double-sided adhesive X1 	15 Bar-end Cap X2 	16 Glue X1 

NOTE Please contact the local distributor if the items you open are not the same, with the above-listed one.

2 Specifications

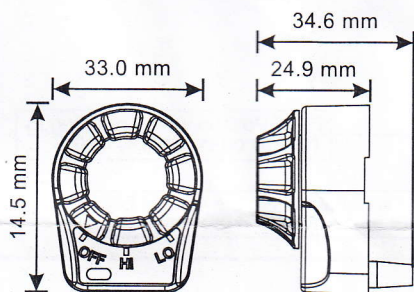


● HI (START)	Heating time : 10min→60°C : 30min→85°C Top steady heat : 85°C ± 5°C Indoor temperature : 25°C Voltage : 13.5V Current : 2.8A
● LO (ON)	Heating time : 10min→35°C : 30min→45°C Top steady heat : 45°C ± 5°C Indoor temperature : 25°C Voltage : 13.5V Current : 0.7A
● Voltage	DC12V
● Switch size	W42.8 X L26.8 X H14.9 mm
● Switch weight (with wire)	About 57.8 g

NOTE Heat - 60°C ± 1°/hr : Cold - 30°C ± 1°3 /hr.

NOTE Design and specifications are subject to change without notice!


3-1 Installation instruction

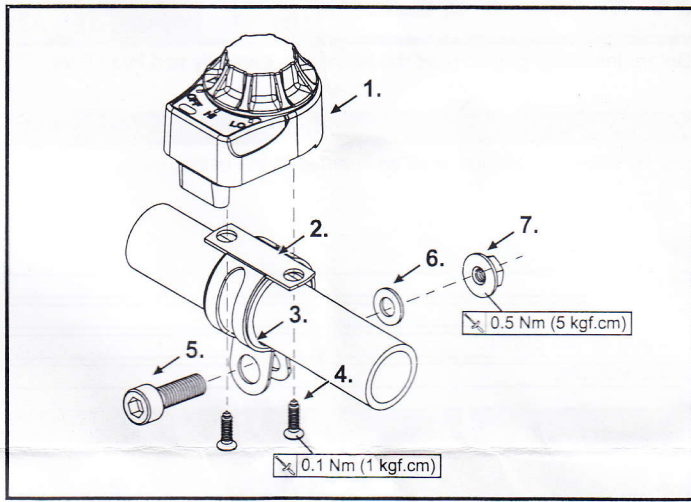

Installation steps

1. C switch (Accessory 2)
2. Handle bar clamp (Accessory 5)
3. Rubber (Accessory 6)
4. M3X10 screw (Accessory 10) $\approx 0.1 \text{ Nm (1 kgf.cm)}$
5. M6X16XP1.0 screw (Accessory 7)
6. M6 washer (Accessory 9)
7. M6 nut (Accessory 8) $\approx 0.5 \text{ Nm (5 kgf.cm)}$

3-2 Bar-end cap installation instruction

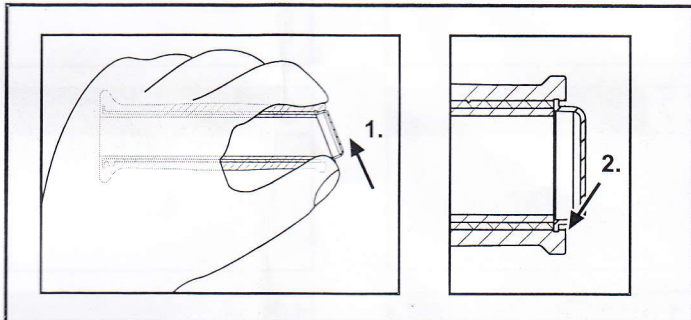

Installation steps

1. Push the edge of cap upward into the trench on the side of the grip.
2. Then push the cap downward into the trench on the side of the grip.

4 Wiring installation instructions

