

FX7004 Overhead Storage Rack Assembly Instructions



Package Contents:

- 1 x Overhead Storage Rack 1.2x1.2m


Tools Required:

- Phillips screwdriver
- Pliers
- Drill
- Tape Measure & Pencil
- Stud finder
- Safety glasses
- Ladder
- Hacksaw or Grinder with cutting disc


If you have any questions or need some advice, please do call us on 01491 579975 or email us at info@garageflex.co.uk and we will do our best to help.

Notes:

1. This Rack is designed for installation into ceiling wood joists or floor joists. Do not install into metal or concrete ceilings.
2. The installation brackets can be installed directly onto the joists or through drywall into the joists. If installing through drywall, you will have to identify the joist centres with a stud finder
3. Plan your installation carefully
4. The standard drop distance from the ceiling is 1 metre.
5. There are two other pre-determined drop distances of 0.5m and 0.75m. The hanging tubes are predrilled for these distances but will have to be cut to fit

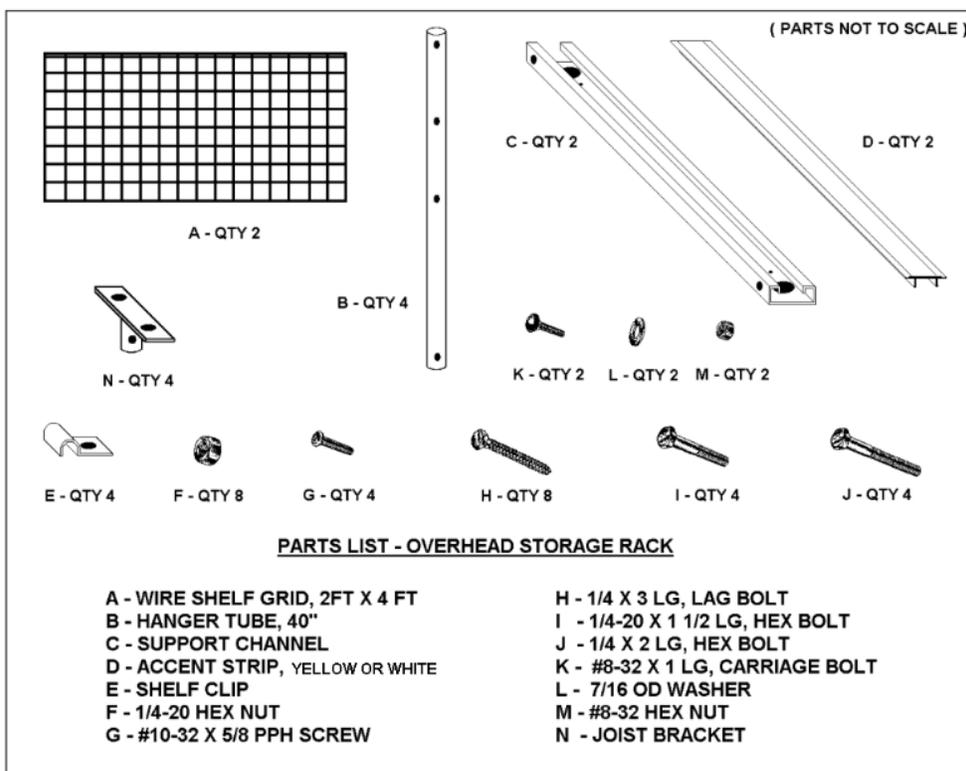


If you have any questions or need some advice, please do call us on 01491 579975 or email us at info@garageflex.co.uk and we will do our best to help.

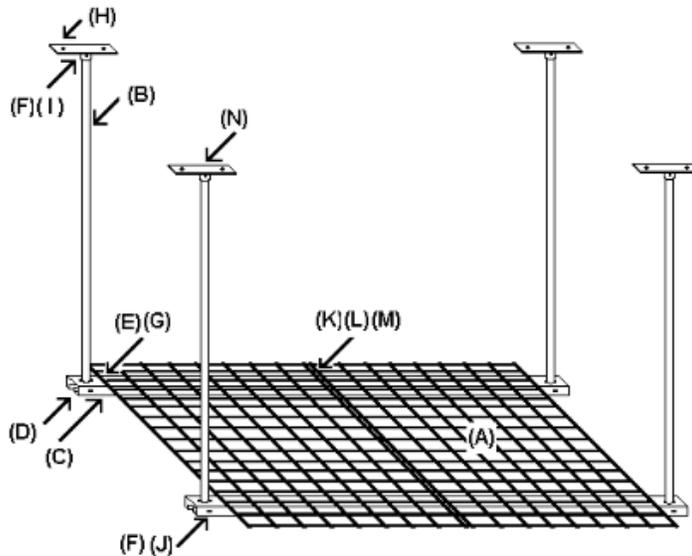

Step 1: If installing through drywall, locate and mark the ceiling joists using either a stud finder or drill

Step 2: Use a joist bracket (Item N) and mark the bracket centrelines and hole locations. Pre drill 3/16" holes in the joists and install the brackets using the 3" lag bolts (Item H).

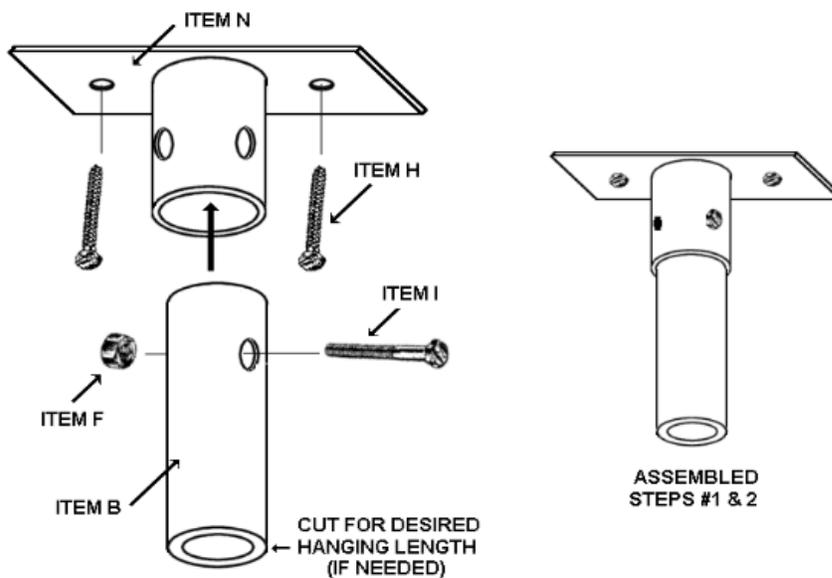


Step 3: Determine the desired shelf level and cut the hanger tubes (Item B) to length if required.


If you have any questions or need some advice, please do call us on 01491 579975 or email us at info@garageflex.co.uk and we will do our best to help.

Step 4: Connect the joist brackets and hanger rods using screws and nuts (items F and I)


Step 5: Connect the support channel (Item C) to the hanger rods using screws and nuts (Items F and J)

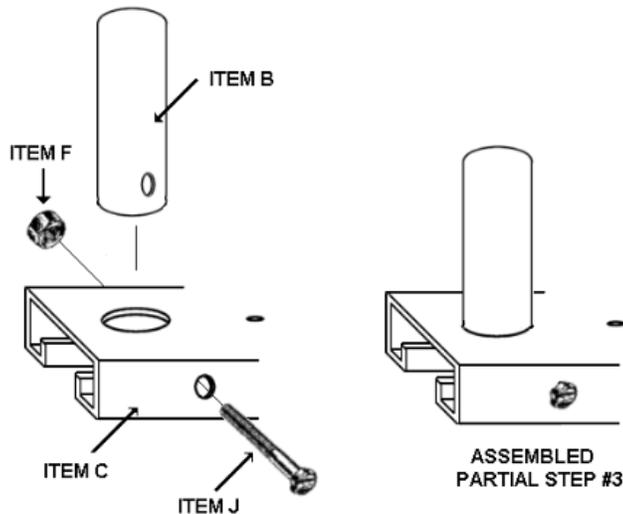

Step 6: Lay the wire shelves (Item A) on the support channels and fasten to the support using clips and screws (Items E and G). Snap the accent strips (item D) into the support channels.

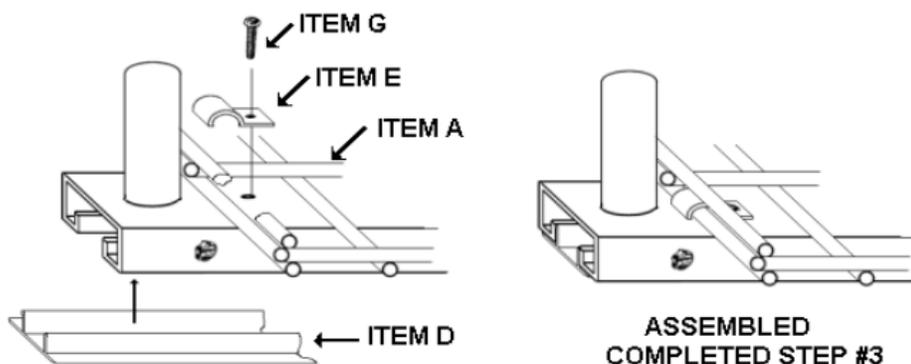

Step 7: Connect the two shelves together using screws, nuts and washers (items K, L and M).

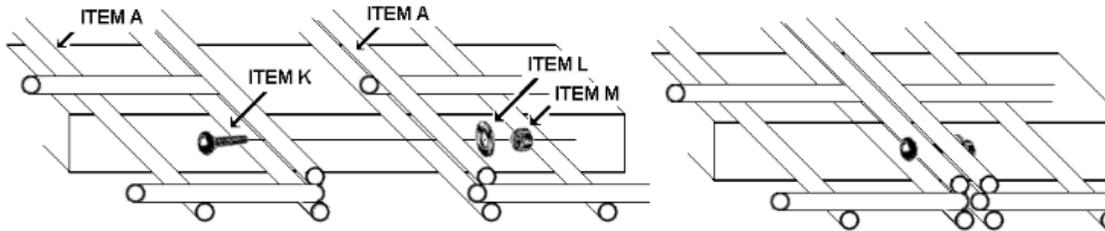

Installation using Garageflex PowerTrack

You will need a set of FX9154 Round Ceiling Connectors which are supplied separately.

Step 1: Mark the ceiling joist locations where you want to install the rack

Step 2: Install two pieces of PowerTrack at 128.59cm apart and install the Track at 90 degrees to ceiling joists

Step 3: Install the 4 round ceiling connectors at 610mm to 914mm apart on the PowerTrack

Step 4: Complete installation using the instructions above