



Deluxe Patio Heater Pilot Assembly Replacement




Step 1

Remove the 4 screws that secure the emitter screen to the head assembly.



Step 2

Detach the emitter screen from the head assembly.

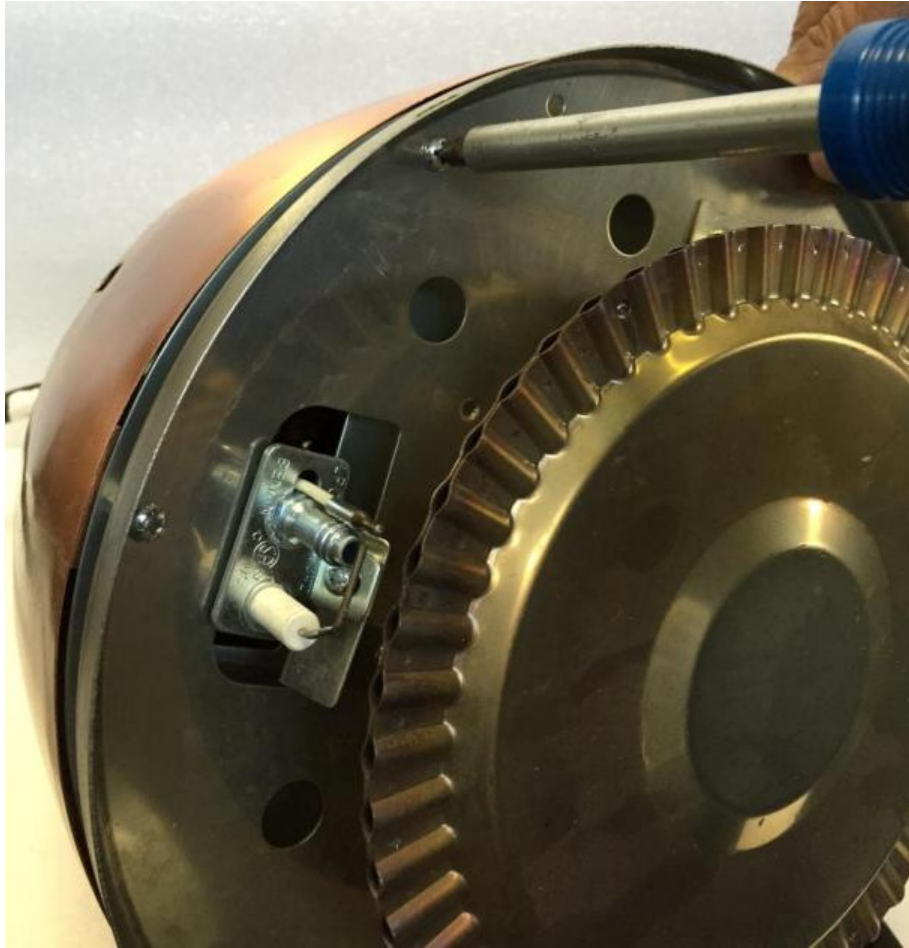


Step 3

Remove the 8 screws that secure the burner plate to the head assembly.




Step 4

Remove the screw holding the pilot assembly bracket into place.

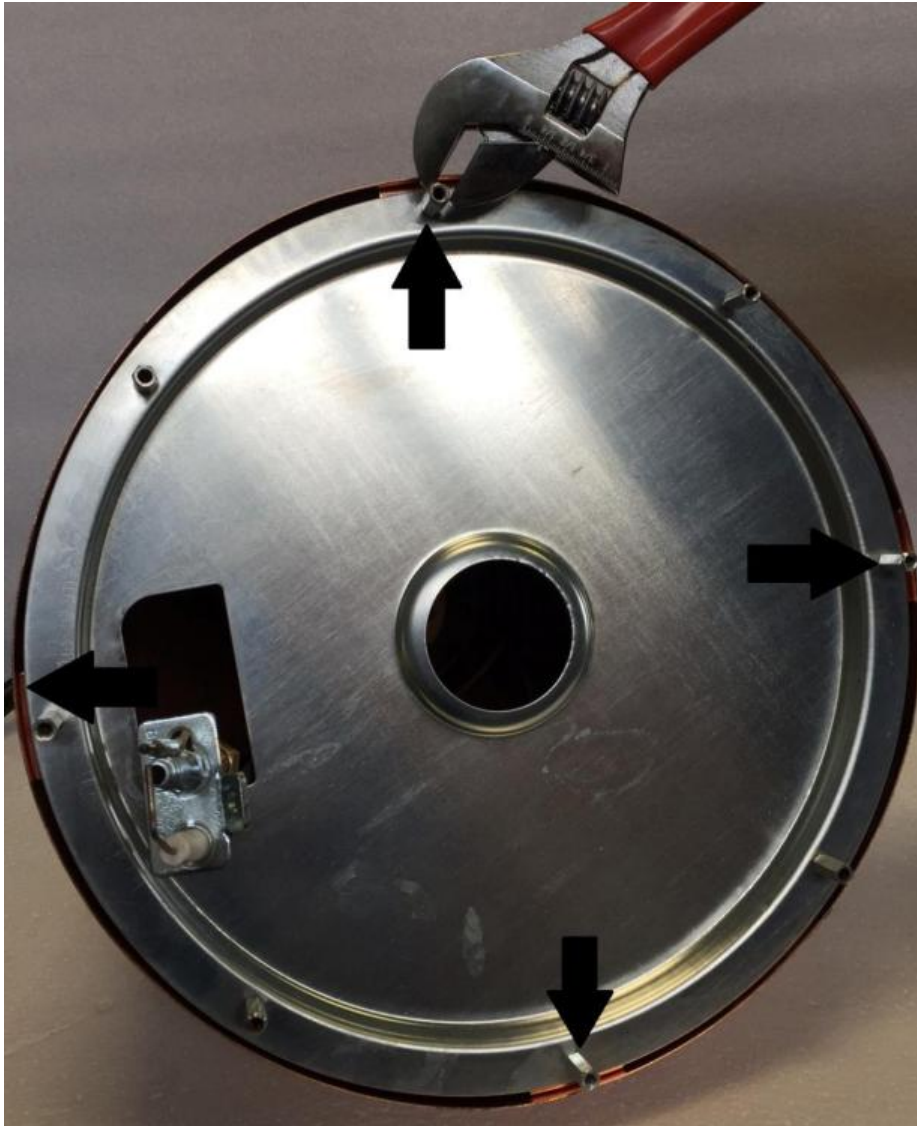

Step 5

Remove 4 threaded spacers that secure the heat shield in place.

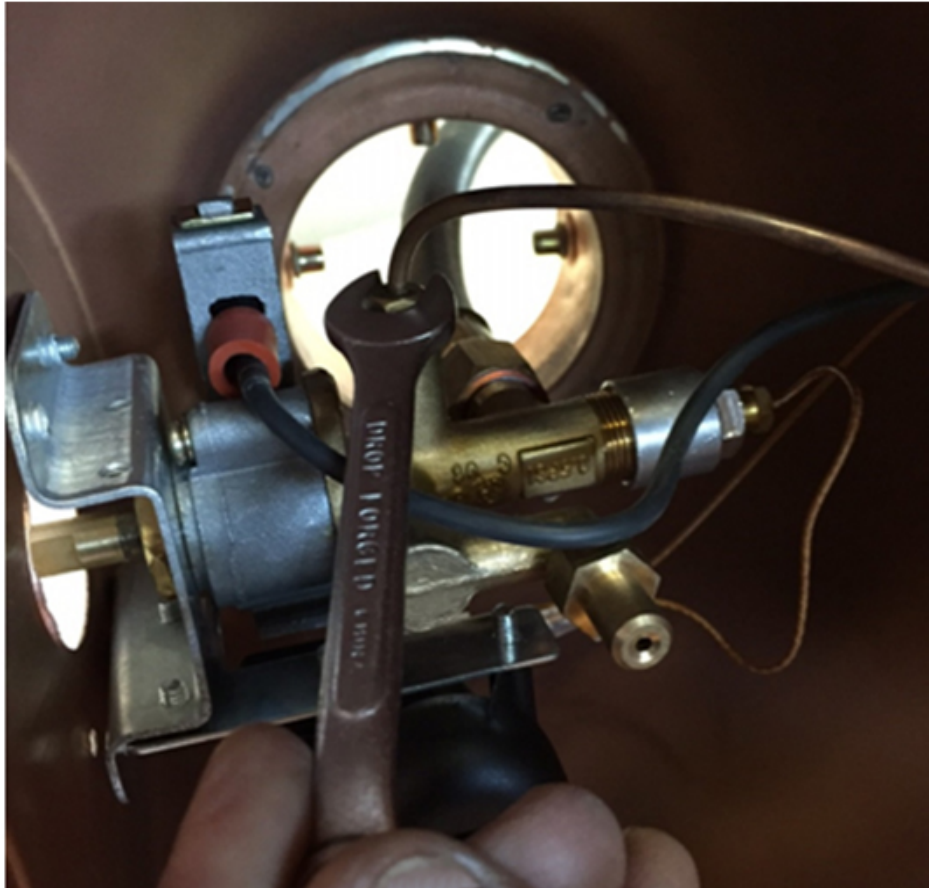


Step 6

Remove the gas line with an 8mm wrench.



Step 7

Remove the thermocouple wire that is connected to the tilt switch.

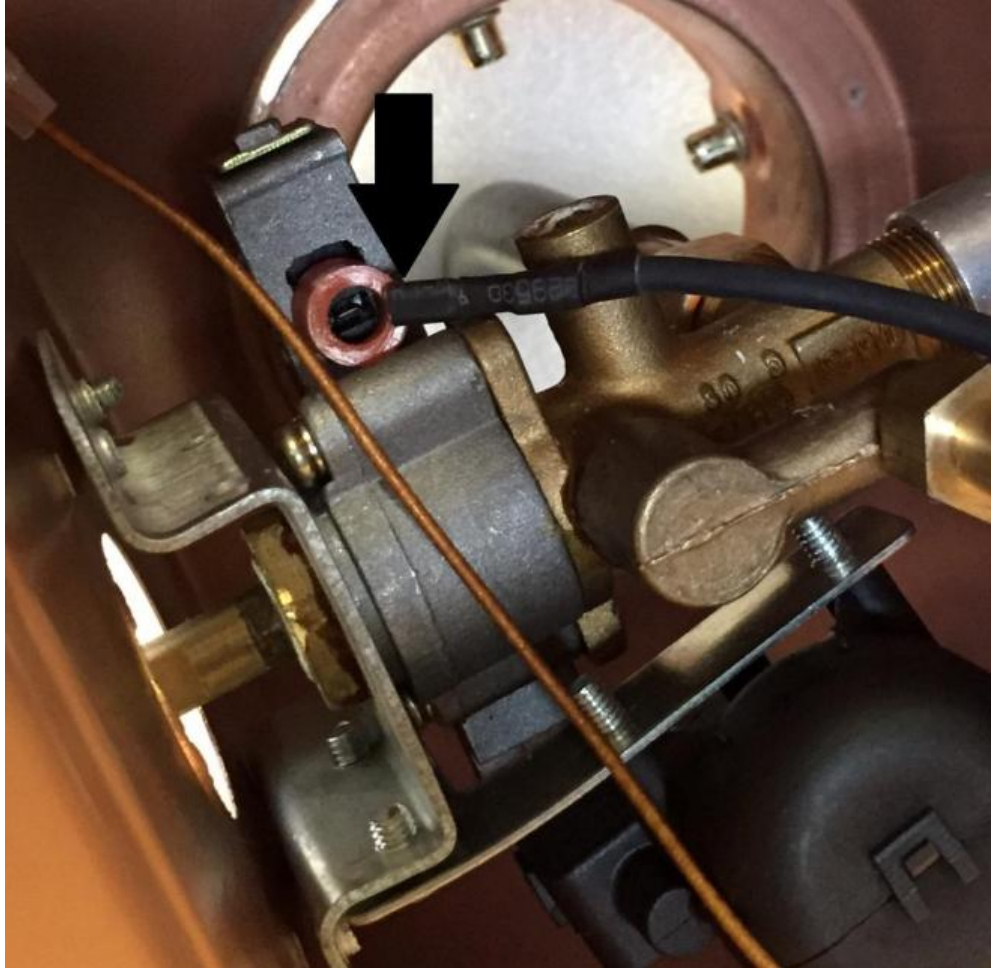

Step 8

Remove the ignition wire from the control housing.

Step 9

Locate the new pilot assembly and reverse steps 1 – 8.