


TOOLS	AND	ACCESSORIES	PART	NUMBERS	
DESCRIPTION				RT NUMBER	
CONTACT CRIMP TOOL				K2MA-01	
CONTACT REMOVAL TOOL				516-280-300	
CONTACT INSERTION TOOL				516-280-400	
BITTREE MALE CONNECTOR				3M	
BITTREE FEMALE CONNECTOR				3F	
CONNECTOR CONTACTS (PINS)				EPIN	
REPLACEMENT HARDWARE KIT				4803R	
PROGRAMMING SHUNTS (RED)				82811-9	
PROGRAMMING SHUNTS (WHITE)				R2811=0	
LACING BAR 6IN (152.4MM)				B-17500	
LACING BAR 3IN (76,2MM)				B175-3	


6IN LACING BAR SHIPPED WITH PATCHBA


-6.000 [152.400]-


E3F CONNECTORS-

SIGNAL GROUND-BINDING POST





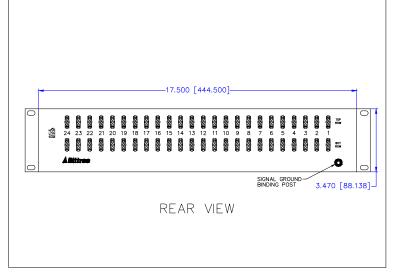

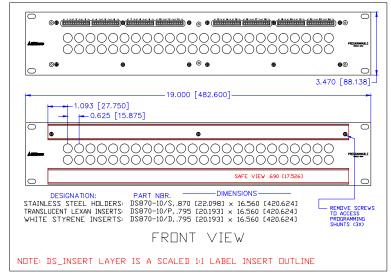

AUDIO, VIDEO, SERIAL DATA 600 WEST ELK AVENUE GLENDALE, CA. 91204 TEL 818 500-8142 FAX 818 500-7062 WWW.BITTREE.COM

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY AND SHALL NOT BE SCLOSED, COPIED OR USED FOR ROCUREMENT OR MANUFACTURING WITHOUT EXPRESS WRITTEN PERMISSION OF BITTREE INCORPORATED

DWG. NO.:

B48DCFNPITE3M20U12L

PART NO.:

B48DC-FNPIT/E3 M20U12L

ORDER NO. 489013

SERIES: 489

PANEL HEIGHT:

2 RU (3.470") [88.138 MM]

DESIGNATION: DS800-10-ASSY

FINISH:

BLACK POWDER COAT

PANEL MATERIAL:

3/16" [4.7625 MM] ALUMINUM

JACK SCREWS: 6-32X3/8FLPH

LAYER (DS_INSERT) IS PROVIDED FOR THE CREATION OF LEGEND STRIPS FOR THIS PATCHBAY. THE RED OUTLINE MATCHES THE SIZE OF INSERT.

PLEASE NOTE THE SAFE VIEW AREA IS PRINTED ON THE RIGHT SIDE OF THE DESIGNATION INSERT.

DWG. SCALE: FULL

PDF. SCALE: NONE

ALL POSSIBLE CARE HAS BEEN TAKEN IN PREPARING THIS SET OF DRAWINGS. STATEMENTS AND SPECIFICATIONS ARE BELIEVED TRUE BUT CANNOT BE GUARANTEED AND THEREFORE WE ARE NOT RESPONSIBLE FOR ANY INACCURACIES. THIS DOCUMENT SHOULD BE USED AS THE BASIS FOR DESIGN OR TO ESTABLISH SPECIFICATION LIMITS.

BITTREE RESERVES THE RIGHT TO CHANGE OR ALTER SPECIFICATIONS OR MATERIALS WITHOUT NOTICE, PROVIDED THE FUNCTION AND AND PERFORMANCE OF THE PRODUCT REMAINS REASONABLY SIMILAR OR IS IMPROVED.



⊕

•