





IDC PUNCH DOWN REAR VIEW PIN-OUT




TOOLS AND ACCESSORIES PAR	RT NUMBERS
DESCRIPTION	PART NUMBER
IMPACT TOOL WITH LIGHT	PTILA
REPLACEMENT IMPACT TOOL TIP	PT2B
THERMOPLASTIC HOUSINGS (BLACK)	K51000
THERMOPLASTIC HOUSINGS (RED)	K51002
THERMOPLASTIC HOUSINGS (WHITE)	K51009
CONNECTOR CONTACTS	K514
PVC TUBING, 2.4 IN (6 CM), BAG DF 100	PTC100
REPLACEMENT HARDWARE KIT	48IDR
THE ENDERENT THREWITE TO	40101
PREGRAMMING SHUNTS (RED)	382811-9
PROGRAMMING SHUNTS (WHITE)	382811-0
LACING BAR 6IN (152.4MM)	LB-17500
LACING BAR 3IN (76.2MM)	LB175-3



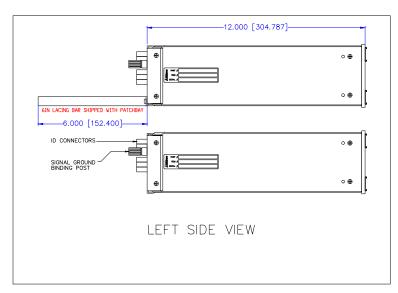

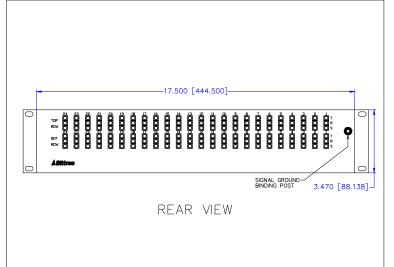

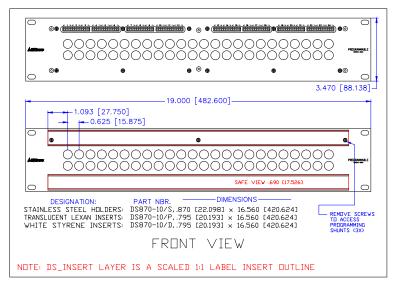

ABittree

PATCHING SYSTEM audio, video, serial data 600 WEST ELK AVENUE GLENDALE, CA. 91204 TEL 818 500-8142 FAX 818 500-7062 WWW.BITTREF.COM

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURING WITHOUT EXPRESS WRITTEN PERMISSION OF BITTREE INCORPORATED

DWG. NO.:

B48DCHNPLTIDM20U12L

PART NO.:

B48DC-HNPLT/ID M20U12L

ORDER NO. 489272

SERIES: 489

PANEL HEIGHT:

2 RU (3.470") [88.138 MM]

DESIGNATION: DS800-10-ASSY

FINISH:

BLACK POWDER COAT

PANEL MATERIAL:

3/16" [4.7625 MM] ALUMINUM

JACK SCREWS : 6-32X3/8FLPH

LAYER (DS_INSERT) IS PROVIDED FOR THE CREATION OF LEGEND STRIPS FOR THIS PATCHBAY. THE RED OUTLINE MATCHES THE SIZE OF INSERT.

PLEASE NOTE THE SAFE VIEW AREA IS PRINTED ON THE RIGHT SIDE OF THE DESIGNATION INSERT.

DWG. SCALE : FULL

PDF. SCALE: NONE

ALL POSSIBLE CARE HAS BEEN TAKEN IN PREPARING THIS SET OF DRAWINGS. STATEMENTS AND SPECIFICATIONS ARE BELIEVED TRUE BUT CANNOT BE GUARANTEED AND THEREFORE WE ARE NOT RESPONSIBLE FOR ANY INACCURACIES. THIS DOCUMENT SHOULD BE USED AS THE BASIS FOR DESIGN OR TO ESTABLISH SPECIFICATION LIMITS.

BITTREE RESERVES THE RIGHT TO CHANGE OR ALTER SPECIFICATIONS OR MATERIALS WITHOUT NOTICE, PROVIDED THE FUNCTION AND AND PERFORMANCE OF THE PRODUCT REMAINS REASONABLY SIMILAR OR IS IMPROVED.

REV.: 0.0 DATE: 02-15-16 BY: 401 CHANGES: TEMPLATE UPDATE