


RoHS COMPLIANT




### TOOLS AND ACCESSORIES

ITEM DESCRIPTION	ORDER NUMBER
DIN CONNECTOR REMOVAL TOOL LENGTH 12" [304.8 MM]	WS1.0REMT00L
DIN CONNECTOR FOR 1505A CABLE	BIT-DIN15-75
DIN CONNECTOR FOR 1855A CABLE	BIT-DIN18-75

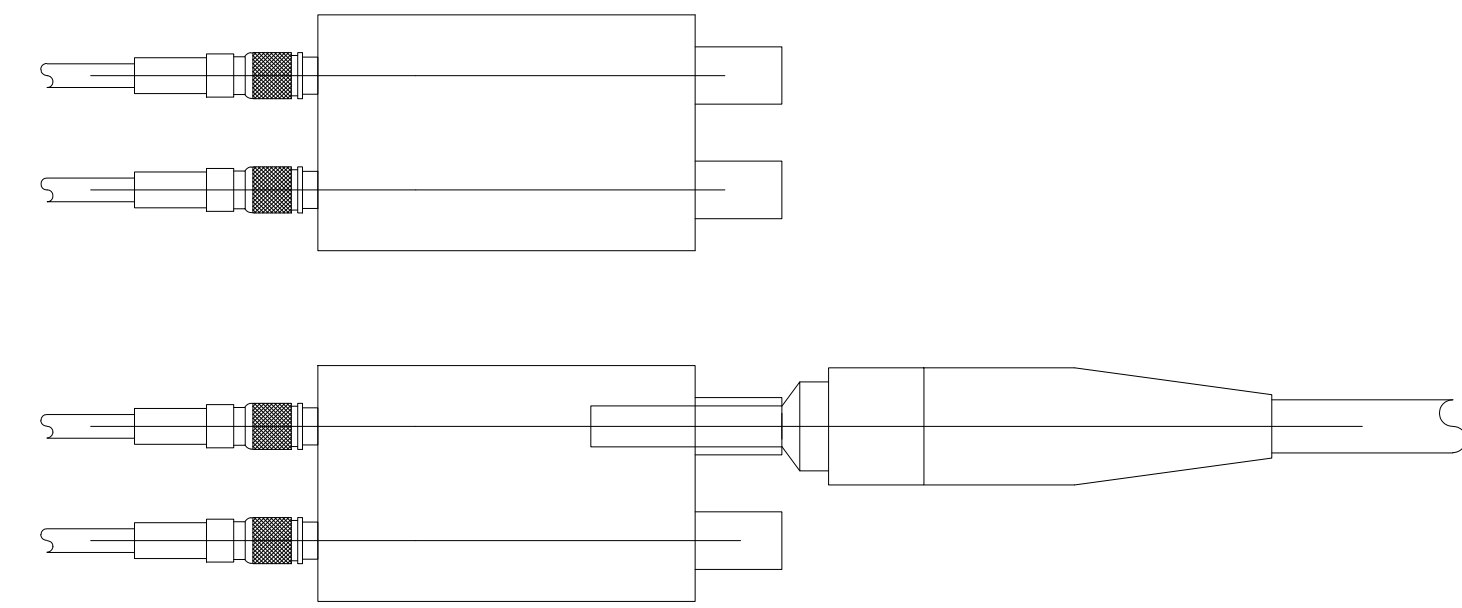


SHOWN AS  
NON-NORMAL AND NON-TERMINATING


SHOWN RECESSED FROM FRONT

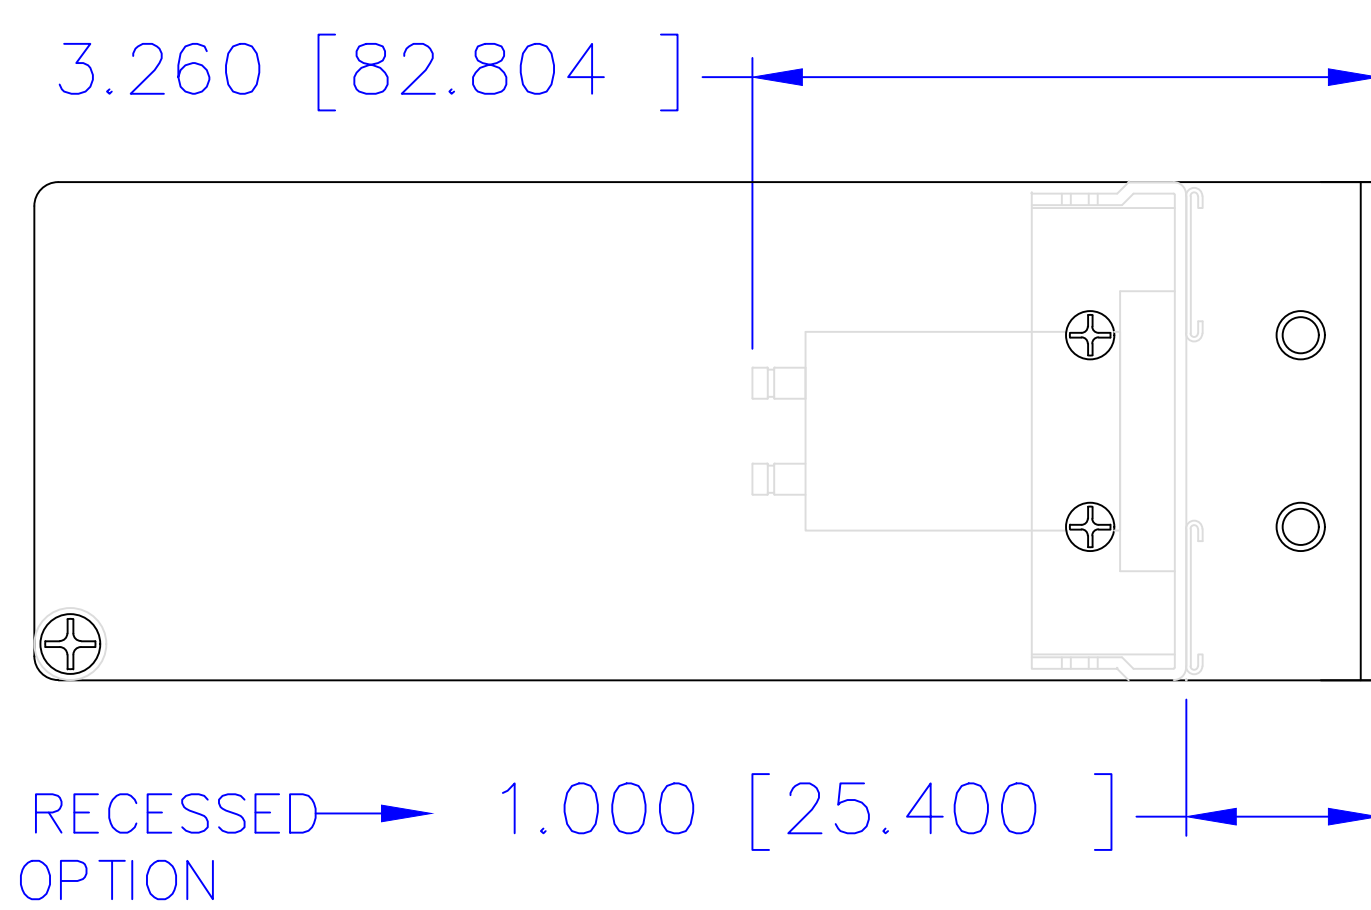


SHOWN EVEN WITH FRONT

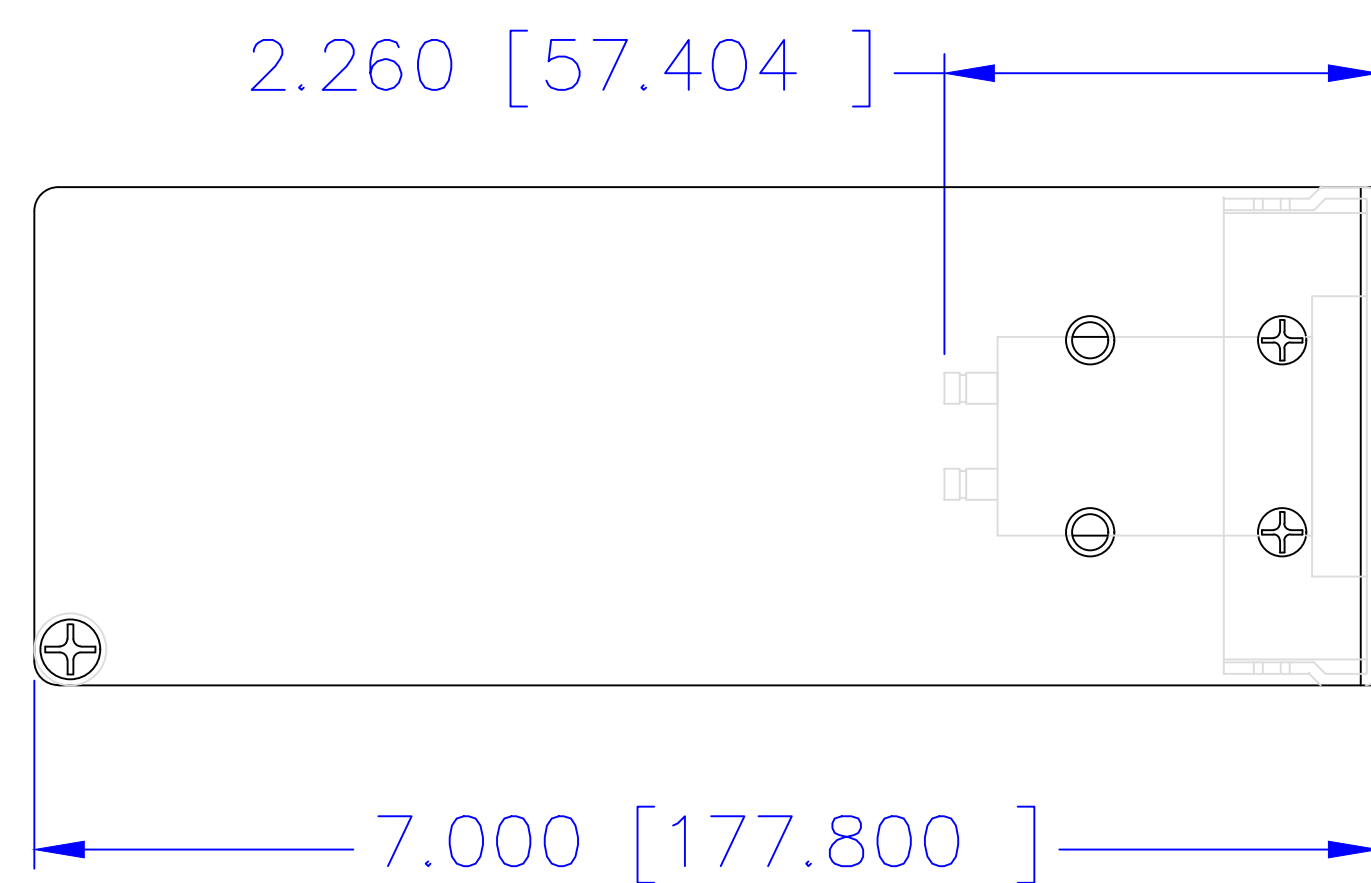


### SIDE VIEWS

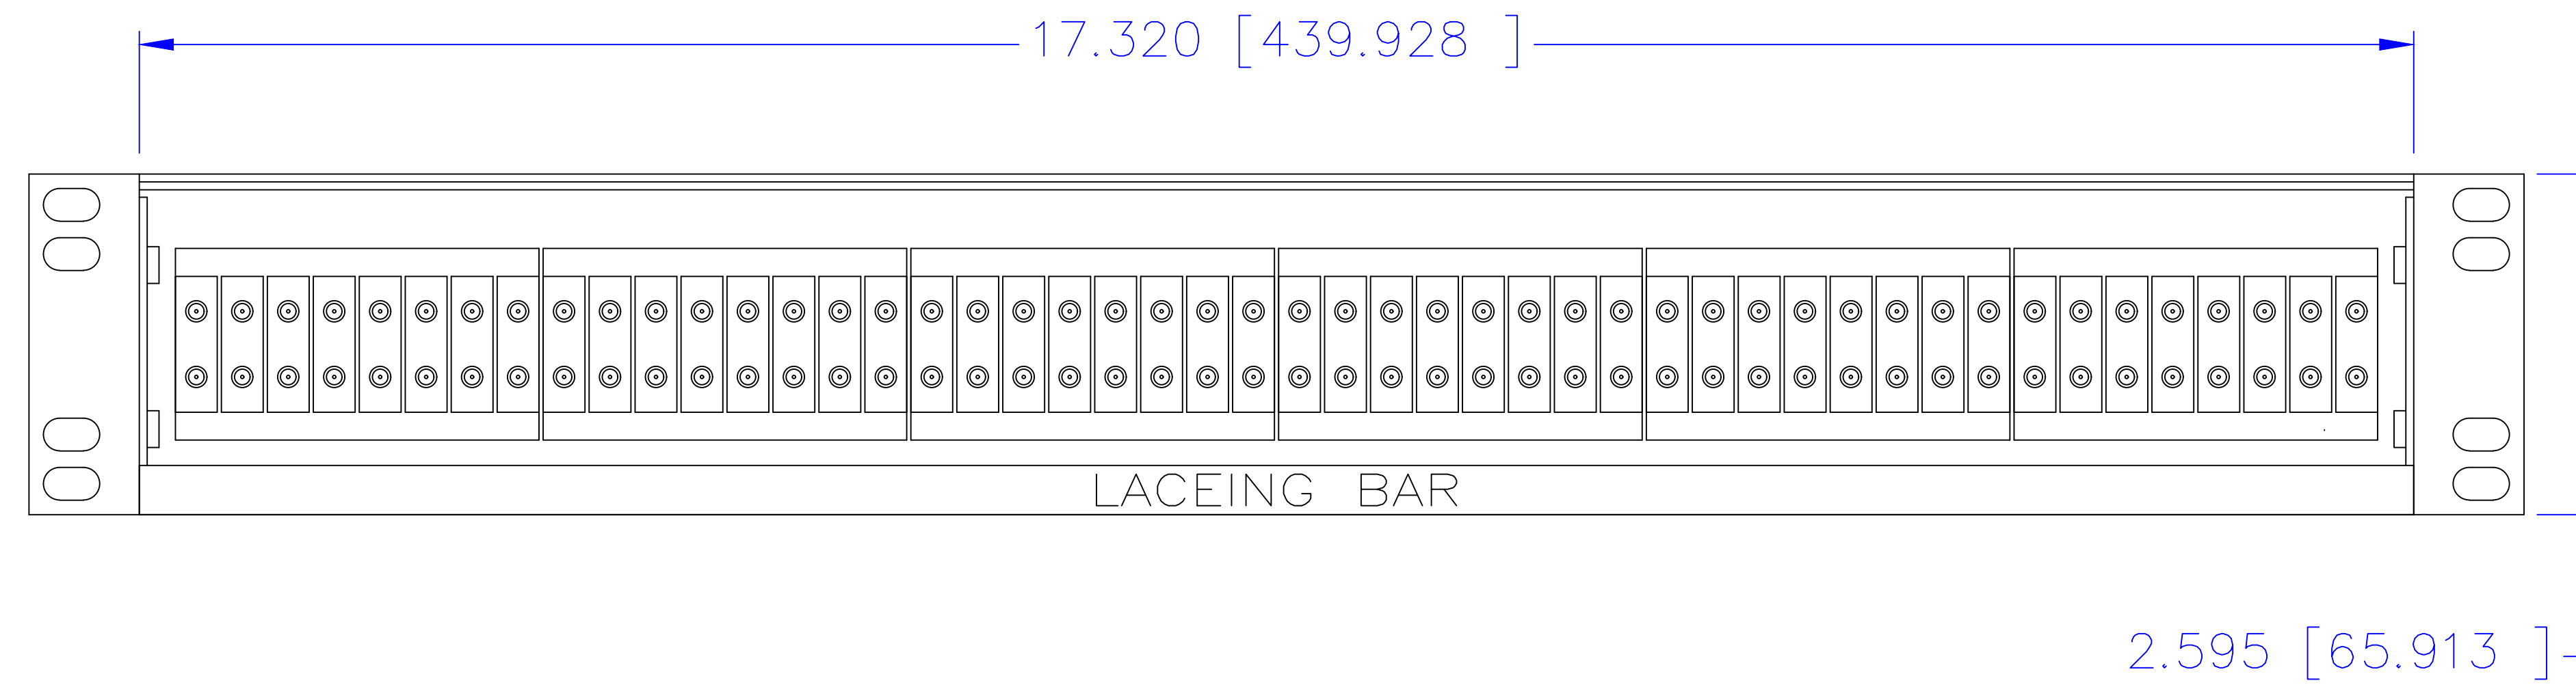

### REAR VIEW

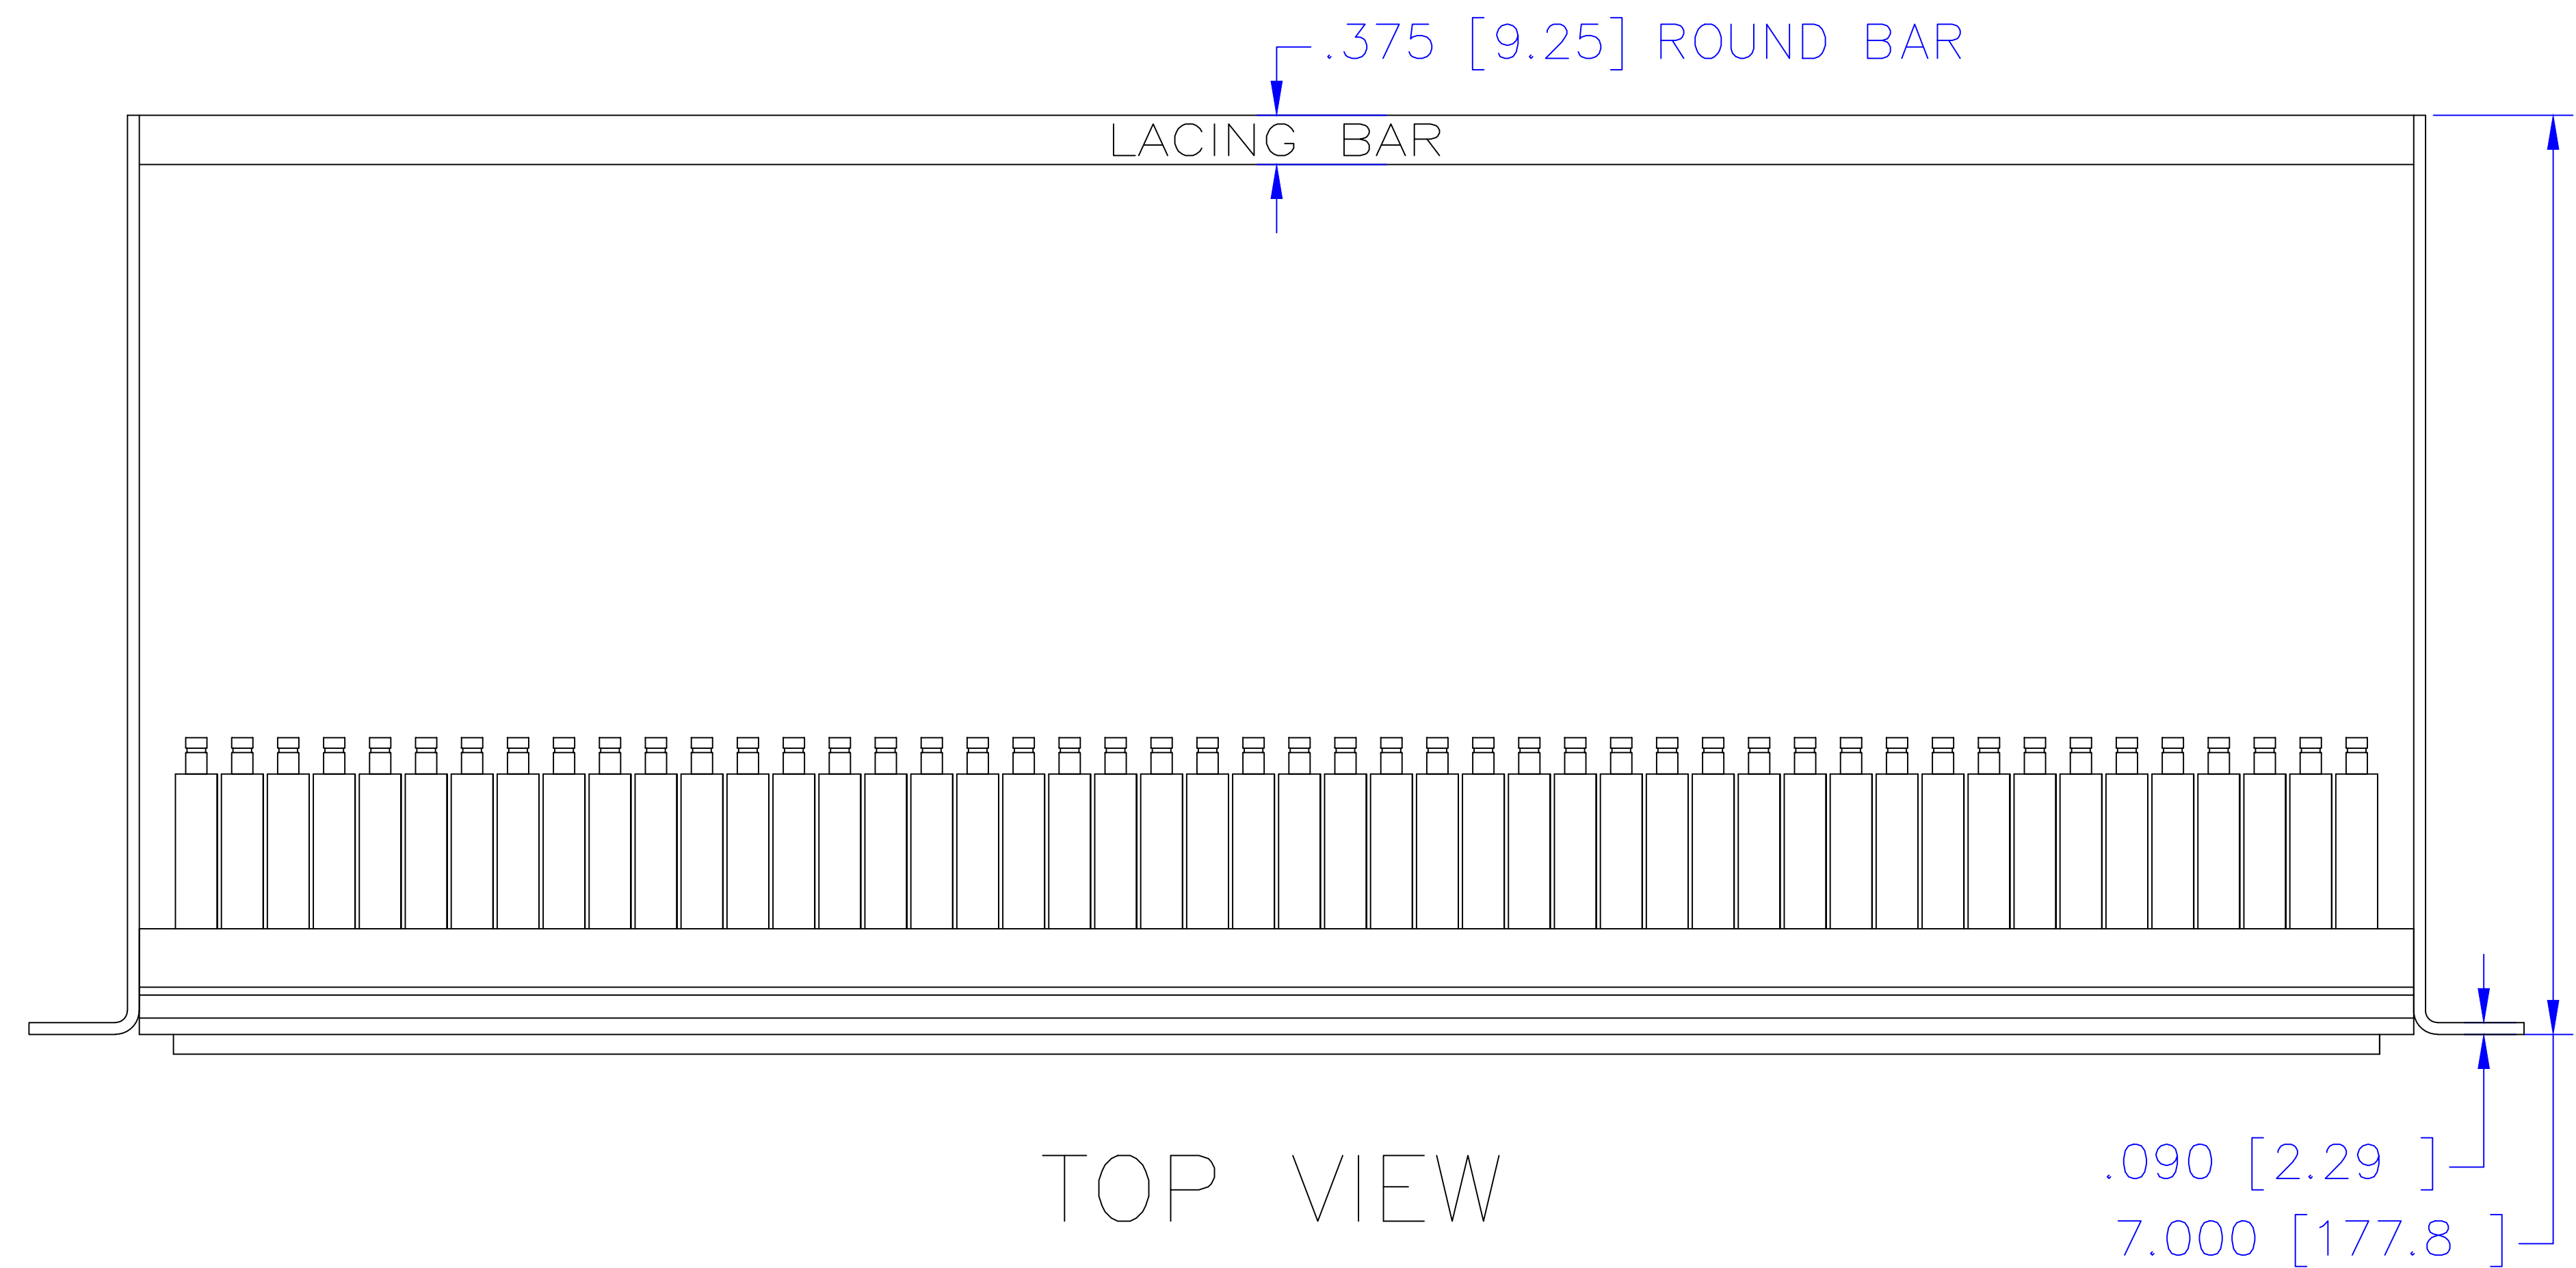

### TOP VIEW

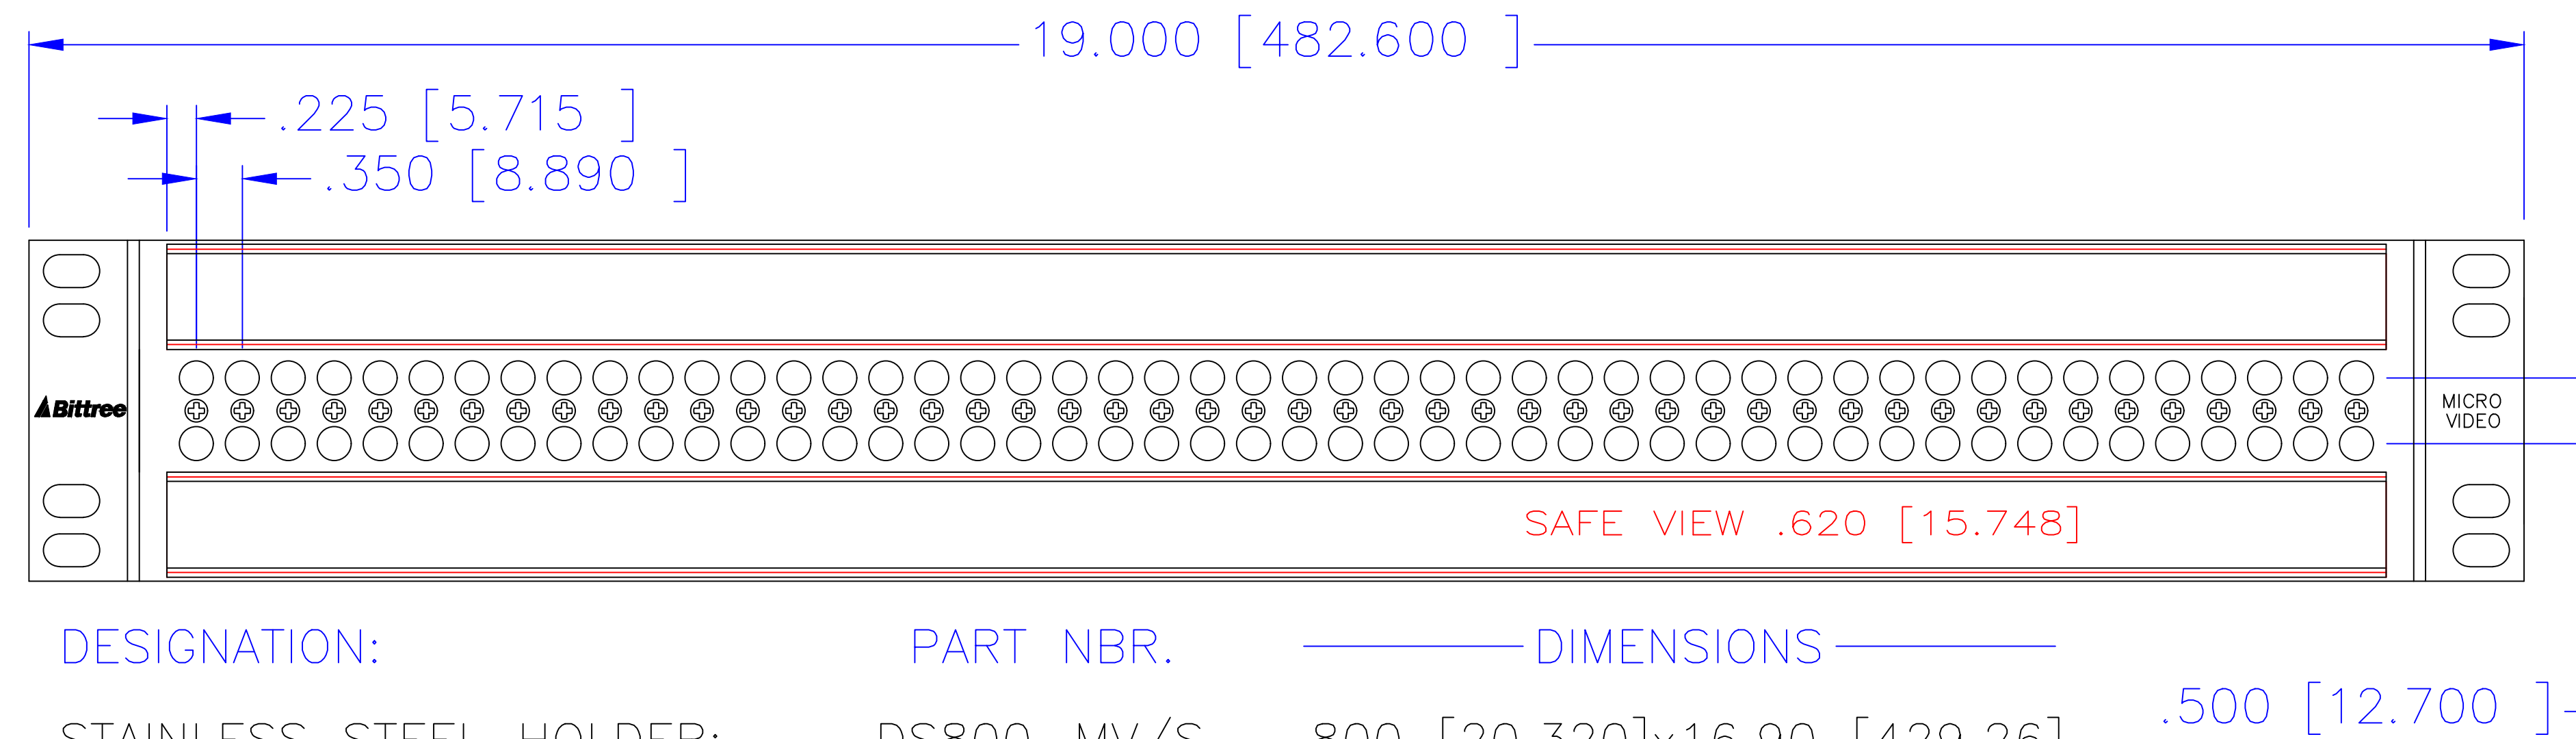

DESIGNATION:

PART NBR.

DIMENSIONS

STAINLESS STEEL HOLDER:	DS800-MV/S	.800 [20.320]	x16.90 [429.26]
TRANSLUCENT LEXAN INSERT:	DS800-MV/P	.725 [18.415]	x16.90 [429.26]
WHITE STYRENE INSERT:	DS800-MV/D	.725 [18.415]	x16.90 [429.26]

### FRONT VIEW

NOTE: DS\_INSERT LAYER IS A 1:1 SCALED INSERT OUTLINE



PATCHING SYSTEMS

AUDIO, VIDEO, SERIAL DATA

600 WEST ELK AVENUE  
GLENDALE, CA. 91204

TEL 818 500-8142

FAX 818 500-7062

WWW.BITTREE.COM

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION OF BITTREE INCORPORATED

DWG. NO.: B96H-1MVNHD

PART NO.: B96H-1MVNHD

DESIGNATION: DS800-MV-ASSY

LAYER (DS\_INSERT) IS PROVIDED FOR THE CREATION OF LEGEND STRIPS FOR THIS PATCHBAY. THE RED OUTLINE MATCHES THE SIZE OF INSERT. PLEASE NOTE THE VIEWABLE AREA IS LISTED IN NOTES BELOW THE FRONT PANEL VIEW.

DWG. SCALE: FULL

PDF. SCALE: NONE

ALL POSSIBLE CARE HAS BEEN TAKEN IN PREPARING THIS SET OF DRAWINGS. STATEMENTS AND SPECIFICATIONS ARE BELIEVED TRUE BUT CANNOT BE GUARANTEED AND THEREFORE WE ARE NOT RESPONSIBLE FOR ANY INACCURACIES. THIS DOCUMENT SHOULD BE USED AS THE BASIS FOR DESIGN OR TO ESTABLISH SPECIFICATION LIMITS.

BITTREE RESERVES THE RIGHT TO CHANGE OR ALTER SPECIFICATIONS OR MATERIALS WITHOUT NOTICE. PROVIDED THE FUNCTION AND PERFORMANCE OF THE PRODUCT REMAINS REASONABLY SIMILAR OR IS IMPROVED.

REV.:

DATE: 11/10/2017

BY: G.S.

CHANGES: