DAF32X

12G+

Video Distribution Amplifier Frame

Bittree® DAF32X Video Distribution Amplifier Frame
For use with DABX Video Distribution Cards (sold separately)
For use with DAFAN (sold separately)
For use with with DARMI Remote IP confidence status monitoring available with external remote interface box (sold separately)

DAF32X Video Distribution Amplifier Frame:
• The DAF32X is a 2RU frame which houses the DABX video distribution amplifiers
• Up to 32 1-in by 4-out distribution amps per frame
• Compact design offers high module density
• Accepts all Bittree X modules
• Wideband frame for sd-sdi, and hd-sdi & 4K UHD 12G SDI
• See thru front cover allows quick status indication
• Hybrid frame available *(*contact Bittree)*
• Individual plexiglass card covers available *(*contact Bittree)*

Mechanical
• Height 3.5 inches (2RU)
• Width 19 inches
• Depth 7 inches
• Nominal Weight 12 lbs. FULLY LOADED
• Hybrid frame available *(*contact Bittree)*

Electrical
• Input Coax
• Connectors DIN 1.0/2.3, 75 ohm
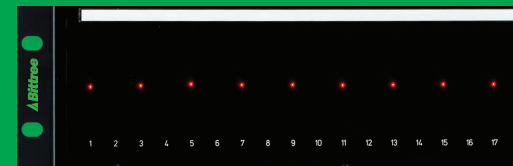• Number of inputs up to 32
• Number of outputs up to 128

Power
• Type External, 48Vdc
• Input Voltage 90-264 Vac, 47-63 Hz, Single Phase
• Redundancy N+1, hot swappable modules
• Power Factor >.99
• EMI complies with EN55022 & FCC Class A
• Large capacity power supply available *(*contact Bittree)*
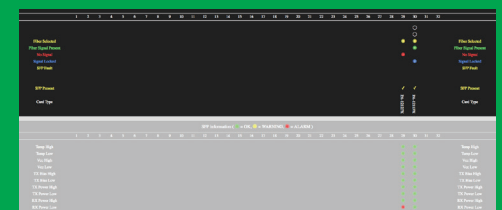
CE RoHS 2011/65/EU

Front - Partially loaded frame with Acrylic Cover

*Front - Partially loaded frame*

Rear - Fully loaded frame

*Remote IP confidence status monitoring

*Individual plexiglass

*Hybrid frame

Bittree, Inc.
600 W Elk Ave,
Glendale, CA
91204 USA

Bittree.com