


LED BARN LIGHT

C&C Lighting Inc. Technical Data Sheet




IP65 RoHS


TECHNICAL SPECIFICATIONS	
MODEL NUMBER	C&C-YASW50 (5000K)
POWER	50W
VOLTAGE	220V
LUMENS /W (EFFICACY)	130Lm/W
LUMEN OUTPUT	6500Lm
BEAMING ANGLE	120°
COLOUR TEMPERATURE (CCT)	5000K
COLOUR ACCURACY (CRI)	70Ra
ON-OFF LEVELS	10~20Lx ON (Dusk) 30~60Lx OFF (Dawn)
DIMENSIONS	374x252x148.8mm
WEIGHT	1.75kg
HOUSING	PC
WORKING TEMPERATURE	Operational : -40~40°C Preservation : -40~90°C
OPERATIONAL HUMIDITY	95%Rh or below (at -40~40°C)
CERTIFICATIONS	RoHS
IP	IP65
APPLICATION	Outdoor (counters, residential areas, commercial areas, etc.)

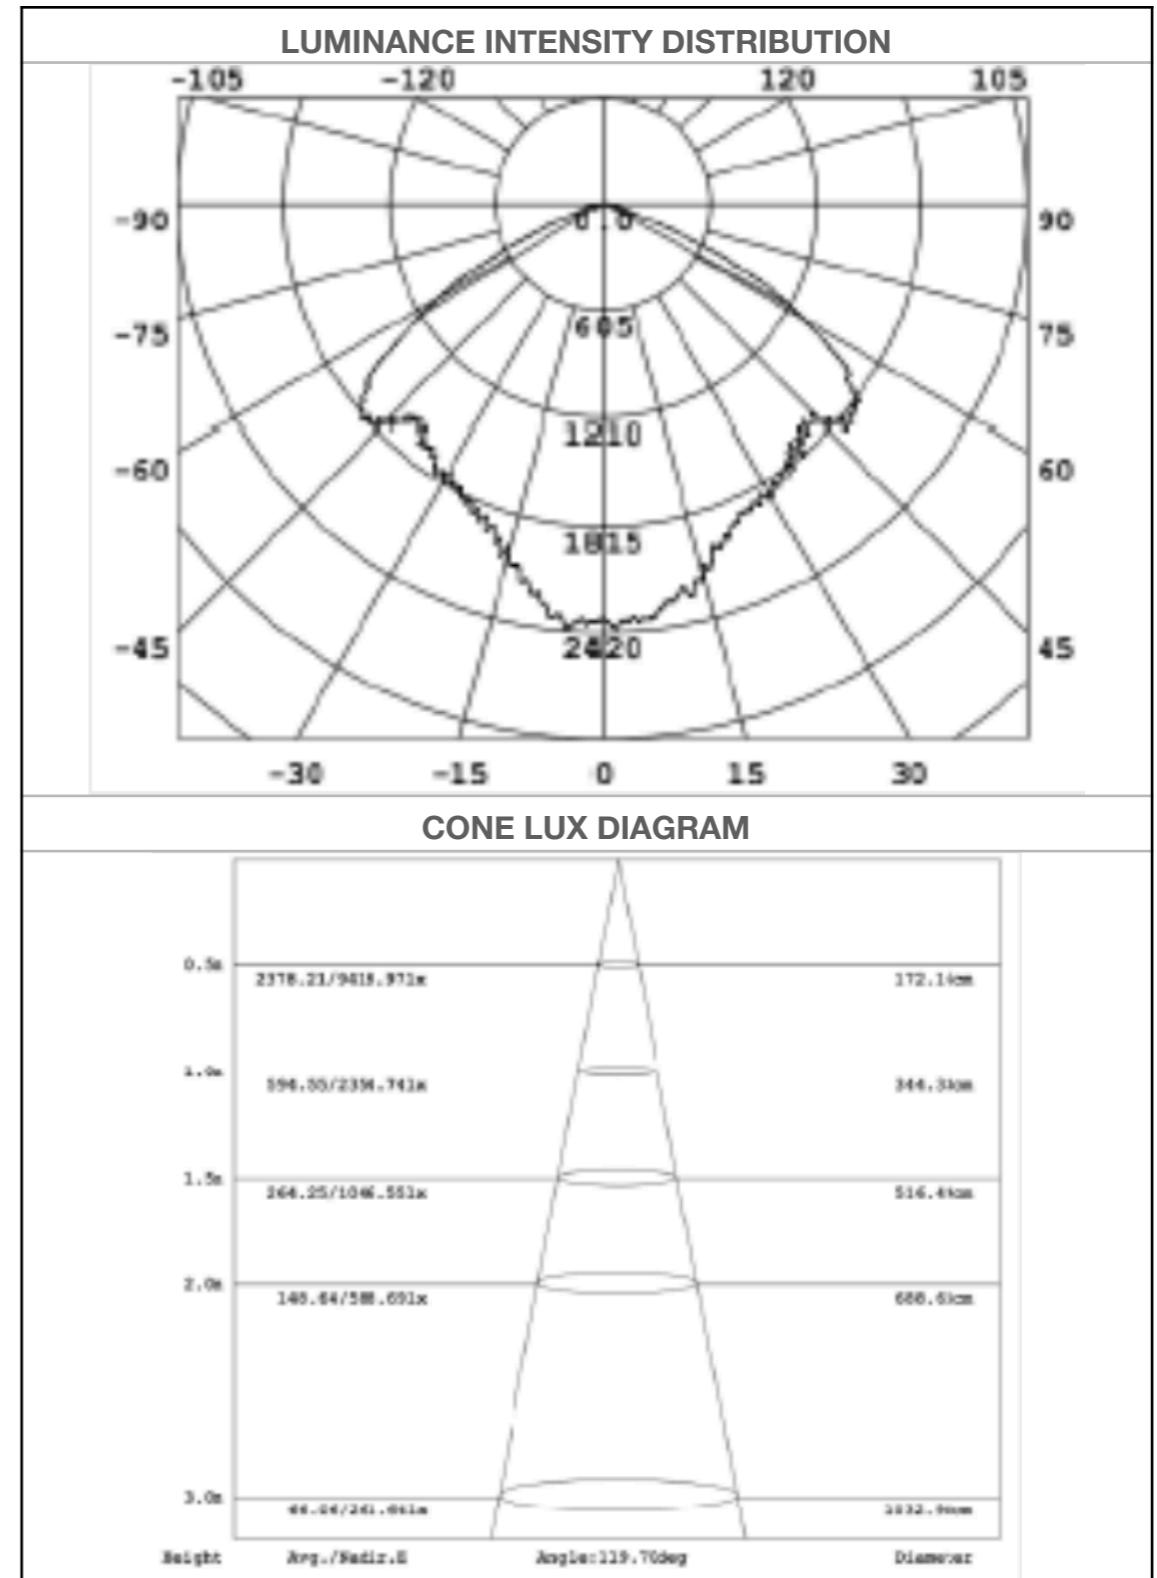

TECHNICAL SPECIFICATIONS	
MODEL NUMBER	C&C-YASW50 (3000K)
POWER	50W
VOLTAGE	220V
LUMENS /W (EFFICACY)	120Lm/W
LUMEN OUTPUT	6000Lm
BEAMING ANGLE	120°
COLOUR TEMPERATURE (CCT)	3000K
COLOUR ACCURACY (CRI)	70Ra
ON-OFF LEVELS	10~20Lx ON (Dusk) 30~60Lx OFF (Dawn)
DIMENSIONS	374x252x148.8mm
WEIGHT	1.75kg
HOUSING	PC
WORKING TEMPERATURE	Operational : -40~40°C Preservation : -40~90°C
OPERATIONAL HUMIDITY	95%Rh or below (at -40~40°C)
CERTIFICATIONS	RoHS
IP	IP65
APPLICATION	Outdoor (counters, residential areas, commercial areas, etc.)

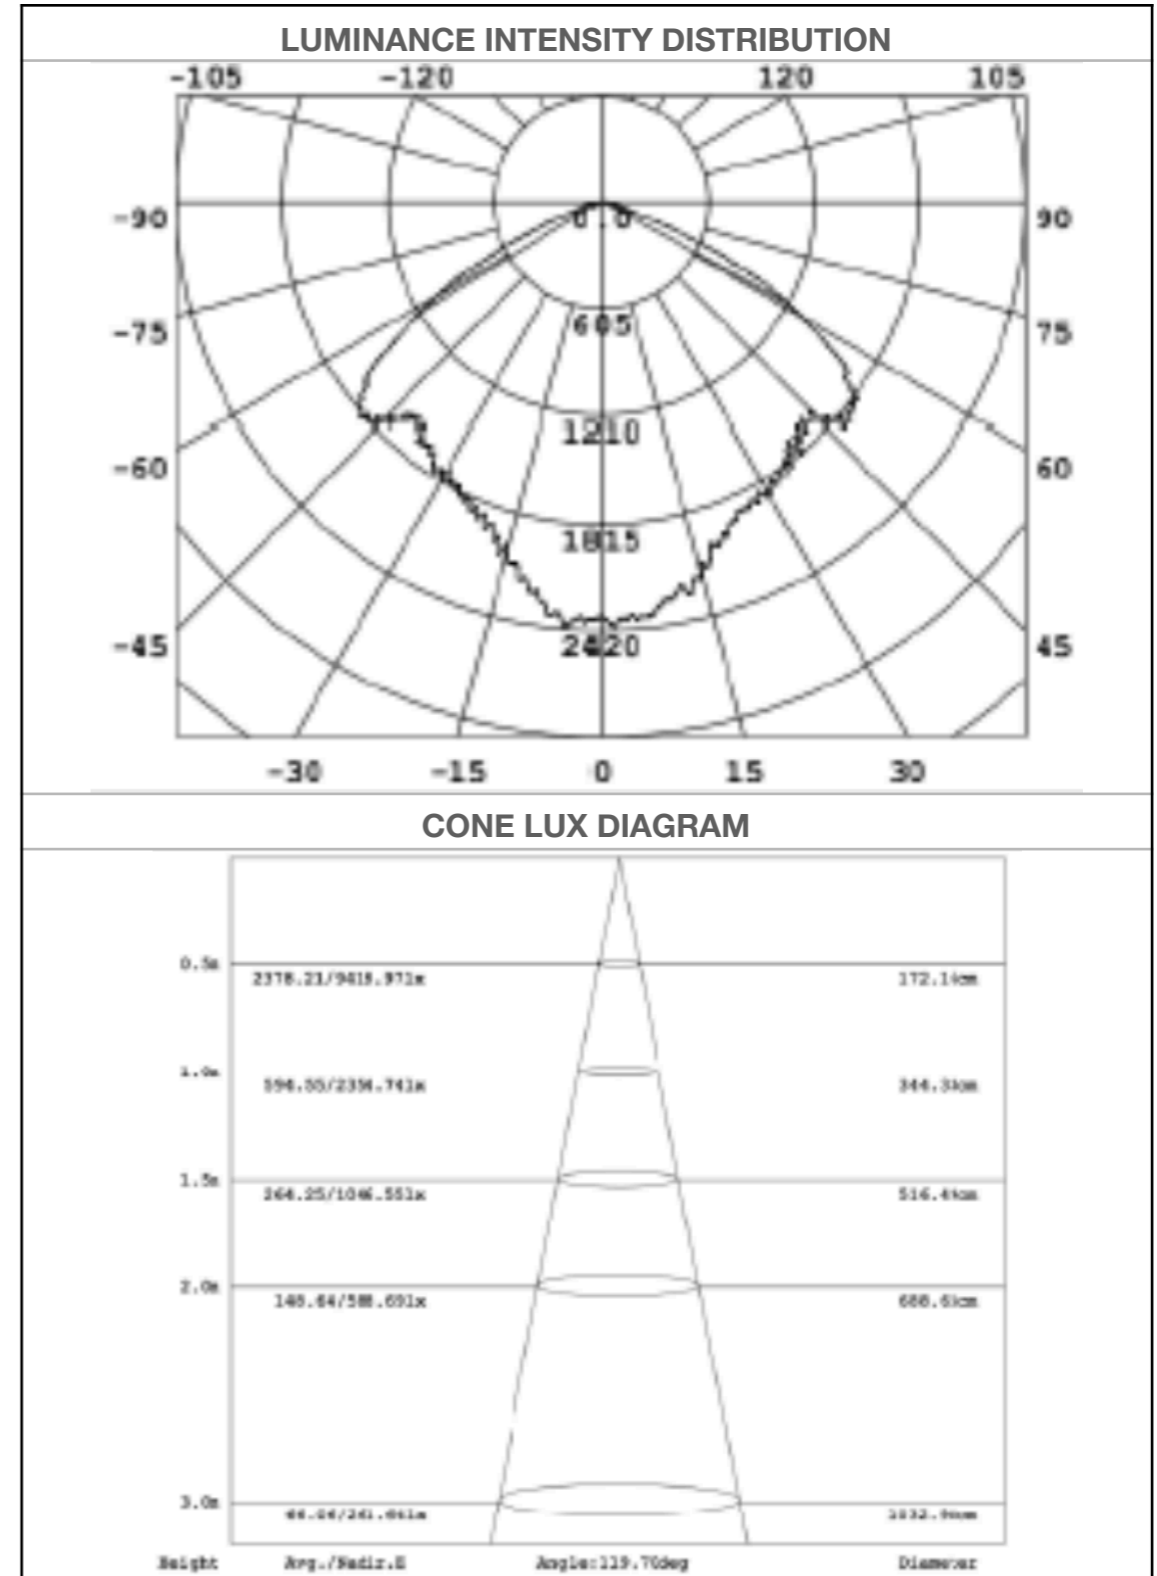

TECHNICAL SPECIFICATIONS	
MODEL NUMBER	C&C-YASW70-U-LS-QW-BR-U-C-W00
POWER	70W
VOLTAGE	220V
LUMENS /W (EFFICACY)	130Lm/W
LUMEN OUTPUT	9100LM
BEAMING ANGLE	120°
COLOUR TEMPERATURE (CCT)	5000K
COLOUR ACCURACY (CRI)	70Ra
ON-OFF LEVELS	10~20Lx ON (Dusk) 30~60Lx OFF (Dawn)
DIMENSIONS	374x252x148.8mm
WEIGHT	1.75kg
HOUSING	PC
WORKING TEMPERATURE	Operational : -40~40°C Preservation : -40~90°C
OPERATIONAL HUMIDITY	95%Rh or below (at -40~40°C)
CERTIFICATIONS	RoHS
IP	IP65
APPLICATION	Outdoor (counters, residential areas, commercial areas, etc.)

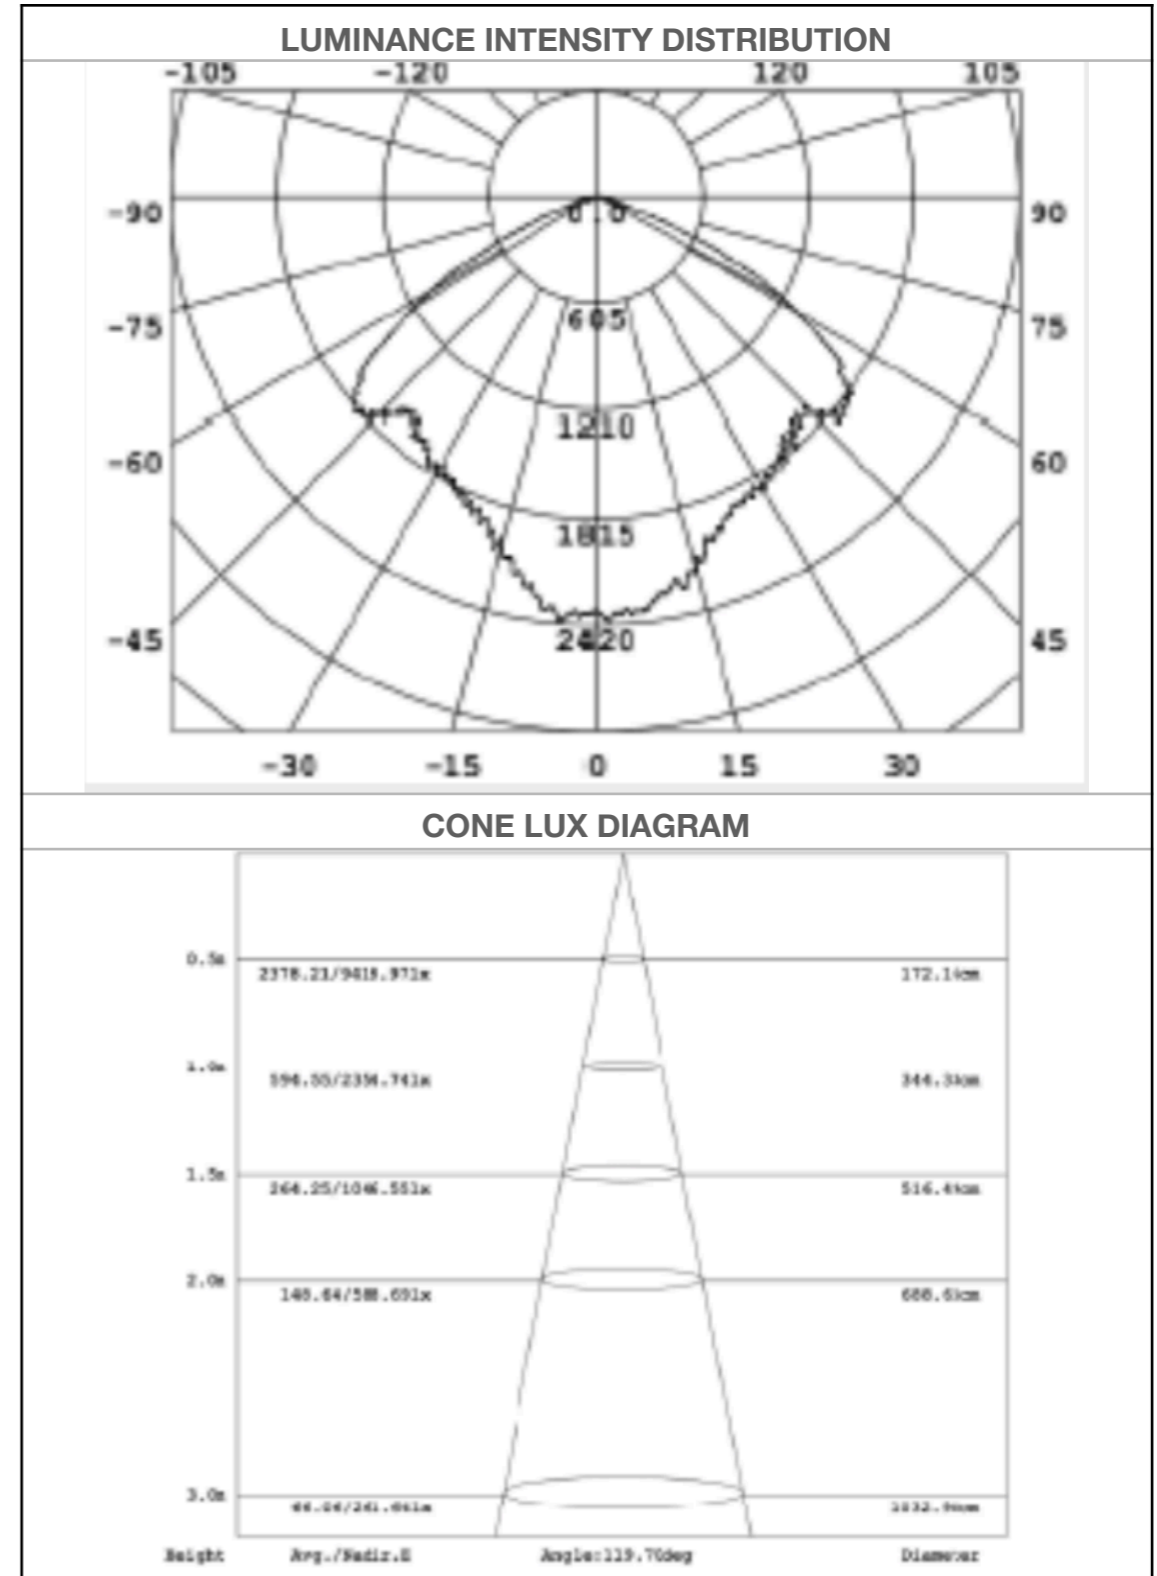

TECHNICAL SPECIFICATIONS	
MODEL NUMBER	C&C-YASW70(3000K)
POWER	70W
VOLTAGE	220V
LUMENS /W (EFFICACY)	120Lm/W
LUMEN OUTPUT	8400Lm
BEAMING ANGLE	120°
COLOUR TEMPERATURE (CCT)	3000K
COLOUR ACCURACY (CRI)	70Ra
ON-OFF LEVELS	10~20Lx ON (Dusk) 30~60Lx OFF (Dawn)
DIMENSIONS	374x252x148.8mm
WEIGHT	1.75kg
HOUSING	PC
WORKING TEMPERATURE	Operational : -40~40°C Preservation : -40~90°C
OPERATIONAL HUMIDITY	95%Rh or below (at -40~40°C)
CERTIFICATIONS	RoHS
IP	IP65
APPLICATION	Outdoor (counters, residential areas, commercial areas, etc.)

