


LED COMMERCIAL PILLARS LIGHT

C&C Lighting Inc. Technical Data Sheet






- Die-cast aluminum housing
- Exuded aluminum pole
- Motion sensor

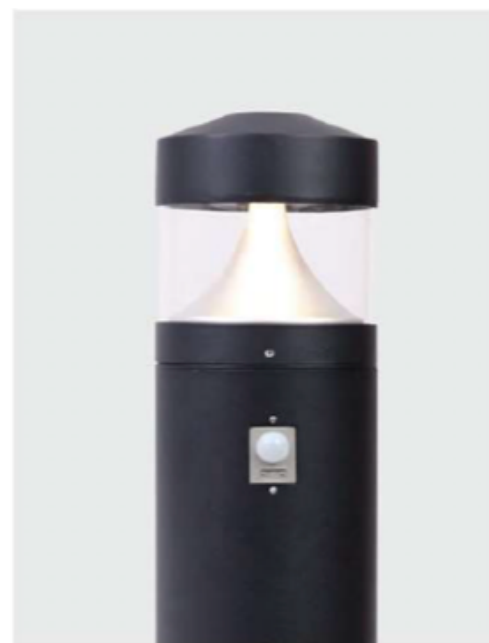


Motion Sensor

DIAGRAMS

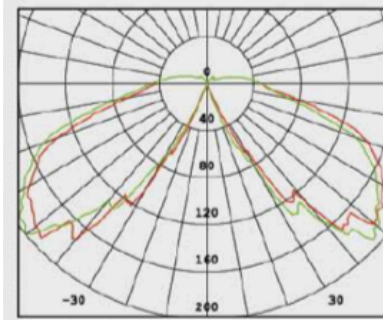

H(m)	Eavg(lx)	Emax(lx)	D(m)
1	50.0	79.5	2.00
2	12.5	19.9	4.00
3	5.6	8.8	6.00
4	3.1	5.0	8.00
5	2.0	3.2	10.00


No:2003A-10W LED No:2003B-10W LED No:2003C-10W LED
 Everlite LED 10W 782.7lm
 Clear PC透明PC
 90.00°
 Class I, IP65

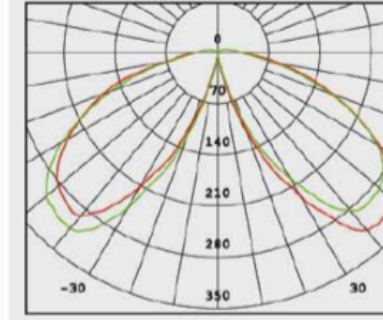

H(m)	Eavg(lx)	Emax(lx)	D(m)
1	117.2	164.5	2.00
2	29.3	41.1	4.00
3	13.0	18.3	6.00
4	7.3	10.3	8.00
5	4.7	6.6	10.00

No:2003A-20W LED No:2003B-20W LED No:2003C-20W LED
 Everlite LED 20W 1107lm
 Clear PC透明PC
 90.00°
 Class I, IP65

DIMENSIONS

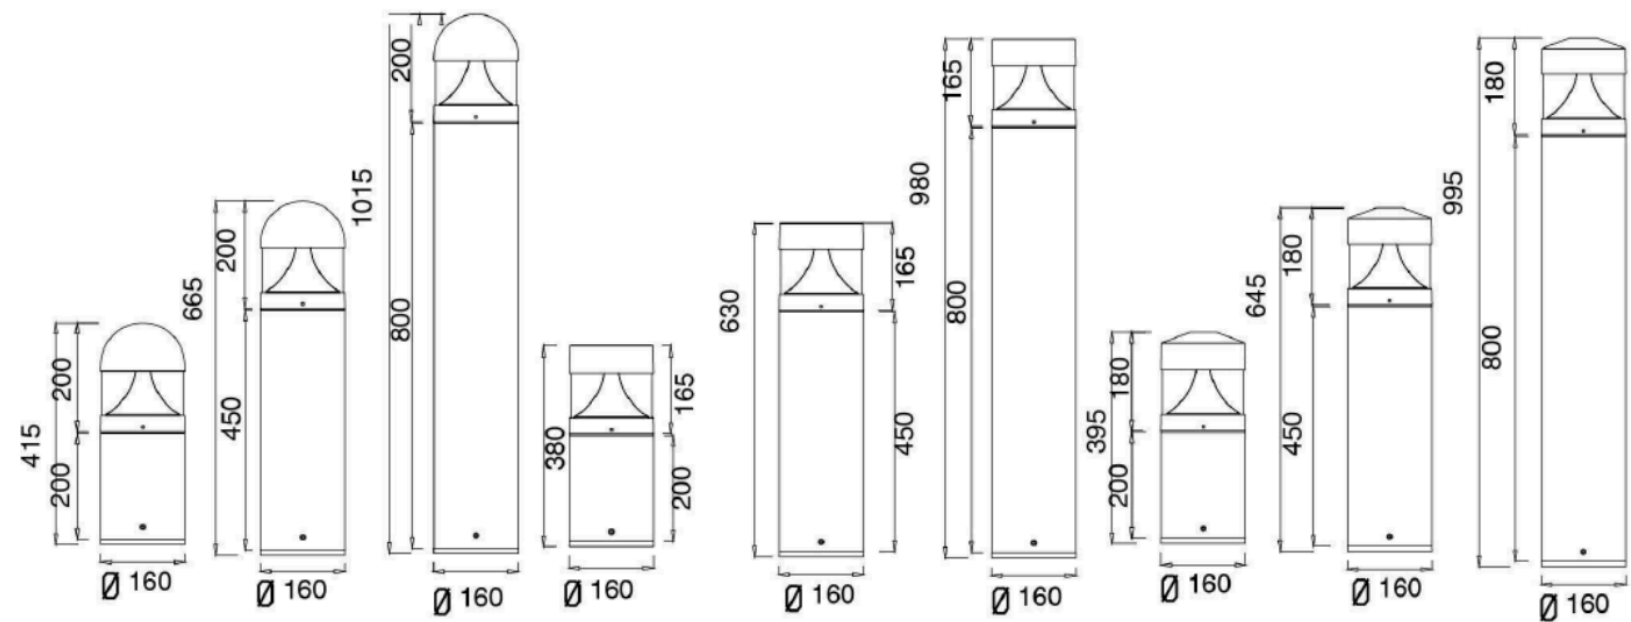

2003A-LED

2003B-LED

2003C-LED

