




C&C LIGHTING inc

Efficient, practical
and sustainable
LED lighting solutions

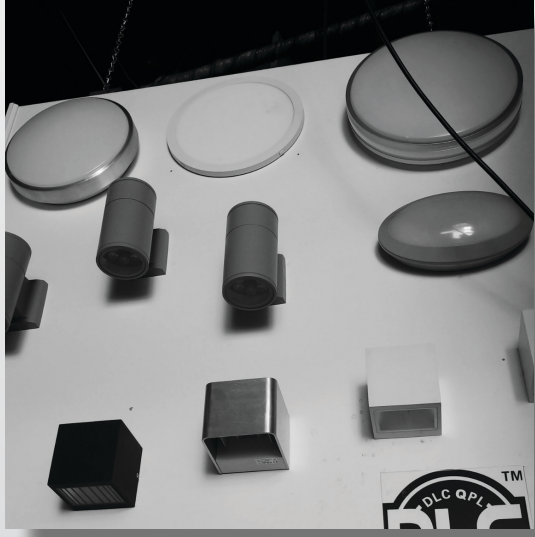

2019

COMMERCIAL
PRODUCT
HIGHLIGHTS



COMMERCIAL LIGHTS

INDOOR FIXTURES

High Bay Lights

Shop Lights

Canopy Lights

Exit Signs / Emergency Lights

OUTDOOR FIXTURES

Wall Pack Lights

Flood Lights

Street Lights

Shoe Box Lights

Pillars Lights

Wall Scones

RETROFIT KITS

T8 / T5

Retrofit Kits

Corn Bulbs

LED Strips

www.ccrled.com


1 - 155 Winges Rd. Woodbridge L4L 6C7
905-856-0903

64 - 7250 Keele St. Vaughan L4K 1ZB
647-887-7403

11 - 400 Esna Park Dr. Markham L3R 3K2
905-604-6809

2 - 91 Esna Park Dr. Markham L3R 2S2
905-604-0143

2x2' LED BACK-LIT FLAT PANEL

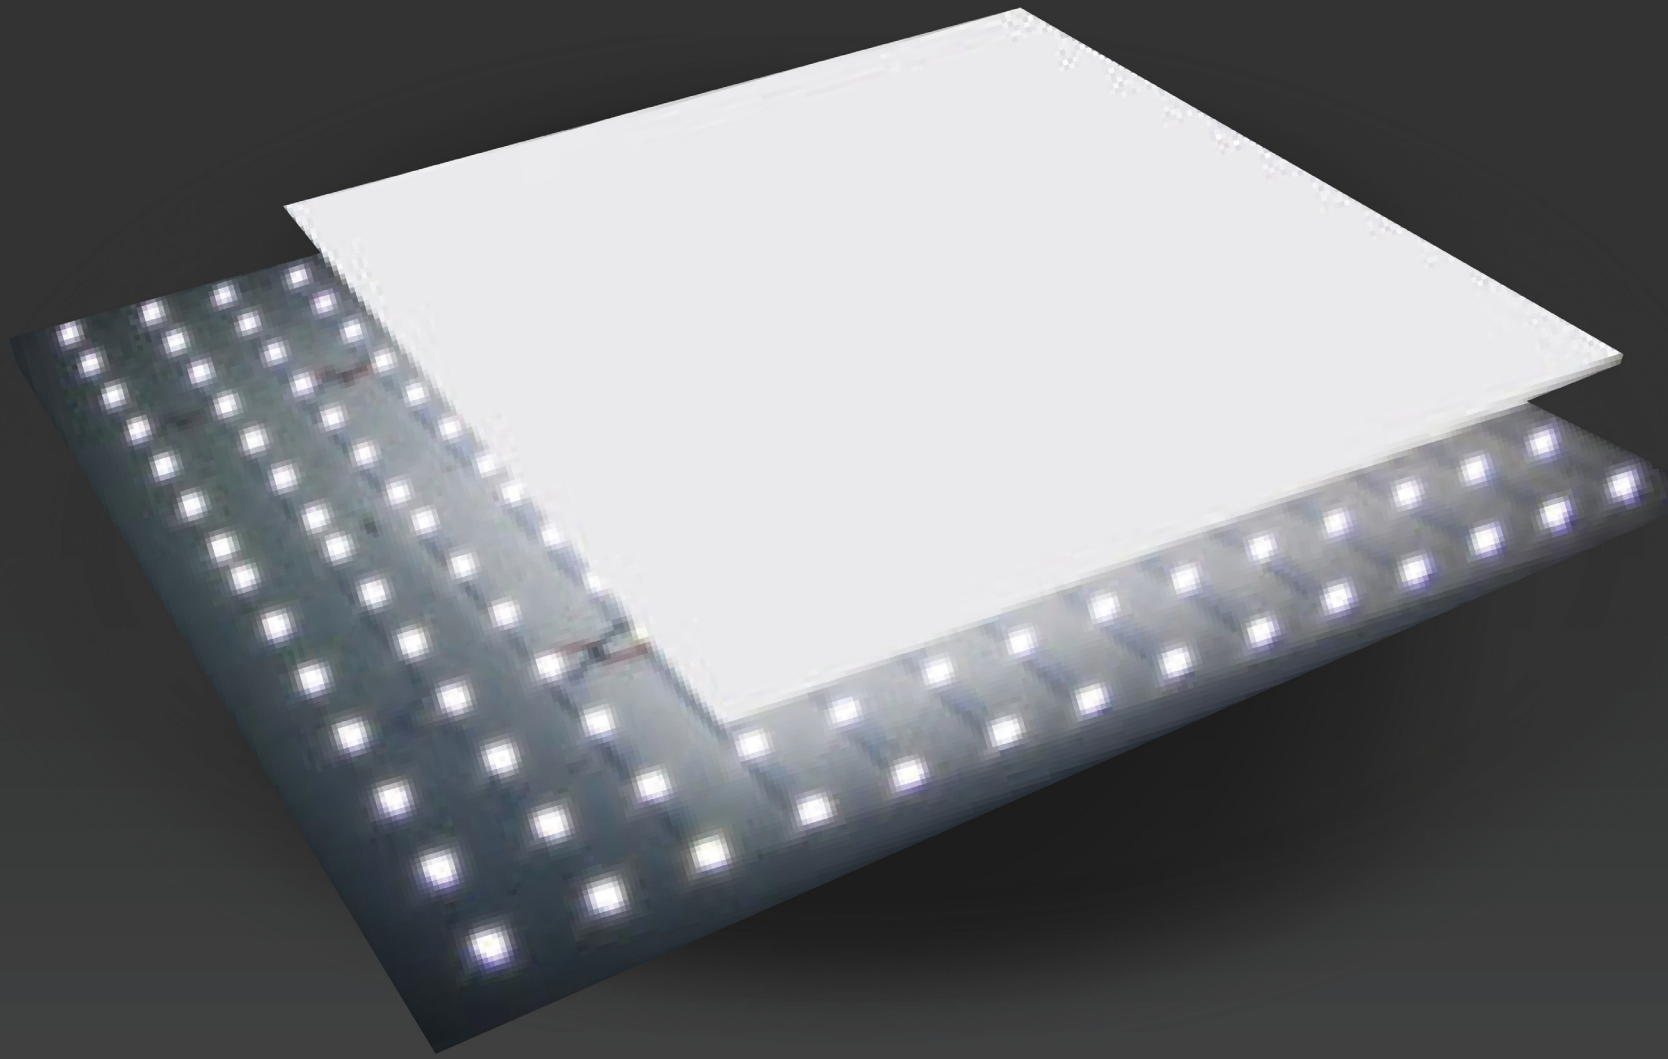

PMMA LENS

more
energy saving

ANTI-STROBE

eyesight
protection

BACK-LIT

25%
brighter

DIMMABLE

with
regular dimmer

Mounting Solutions



- Eliminating strobe of traditional LED lighting, our Advanced LED Flat Panel is suitable for studying and working environment as it protects the eyesights of its users. It reduces tiredness over long period of exposure.
- PMMA lens and Back lit LED light source makes our light 25% brighter in comparison to older models.
- 20% more energy saving compared to previous panel lighting.
- Dimmable by regular dimmer, no longer need of high-cost 0-10 V special dimmer.




[1] UFO HIGH BAY LIGHT

POWER 60W 80W 100W 150W 200W
VOLTAGE 120V / 347V
LUMEN OUTPUT 10538-26000Lm
CCT 3000-6000K
DIMENSION varies
IP RATING IP65
MATERIAL Radiator : ADC12 / Lens : PC
APPLICATION Indoor(counter, residential, commercial, etc.)




[2] LINEAR HIGH BAY LIGHT

POWER 110W 160W 220W 260W 320W
VOLTAGE 120-347V
LUMEN OUTPUT 14000-42000Lm
EFFICACY 130Lm/W
CCT 3000-5000K
DIMENSION 610x240x45mm / 1220x320x45mm
INSTALLATION Clean mounting
DIMMING 1-10V dimming, no flickering
APPLICATION Suitable for dry / damp locations
 Warehouses, gymnasiums, etc.

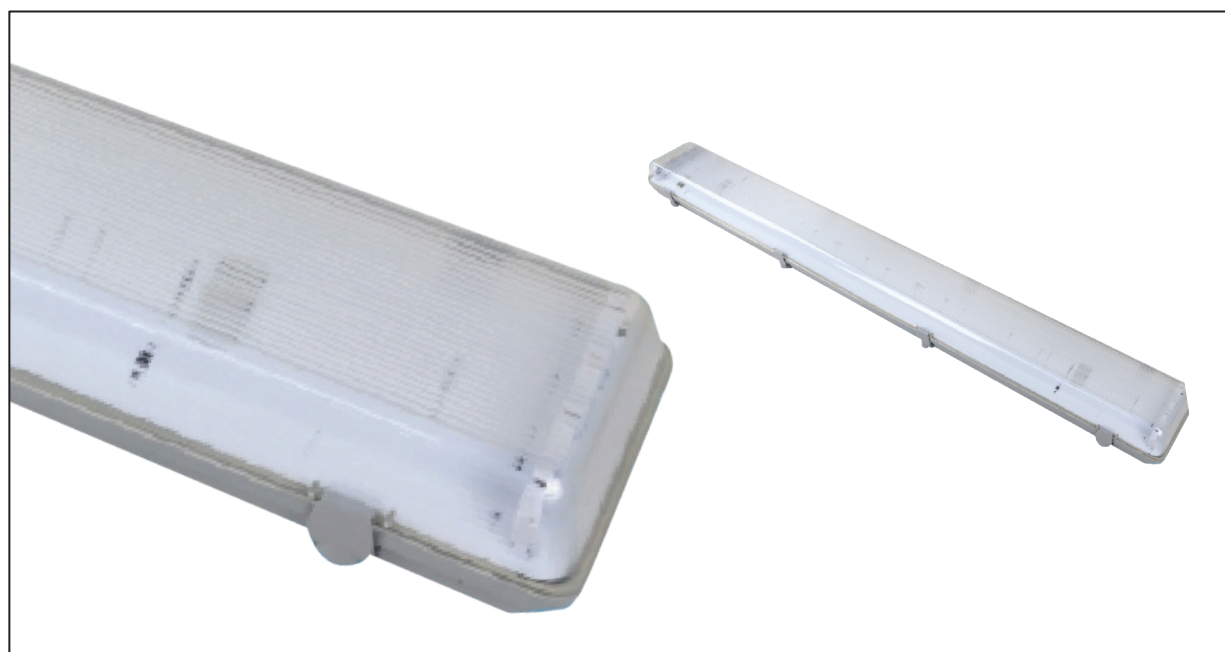

[3] LINEAR FIXTURE WITH 4" T8 FITTING


POWER 54W
LUMEN OUTPUT 6480Lm
CCT 3000-6000K
LENGTH 2FT 4FT 8FT
IP RATING IP65

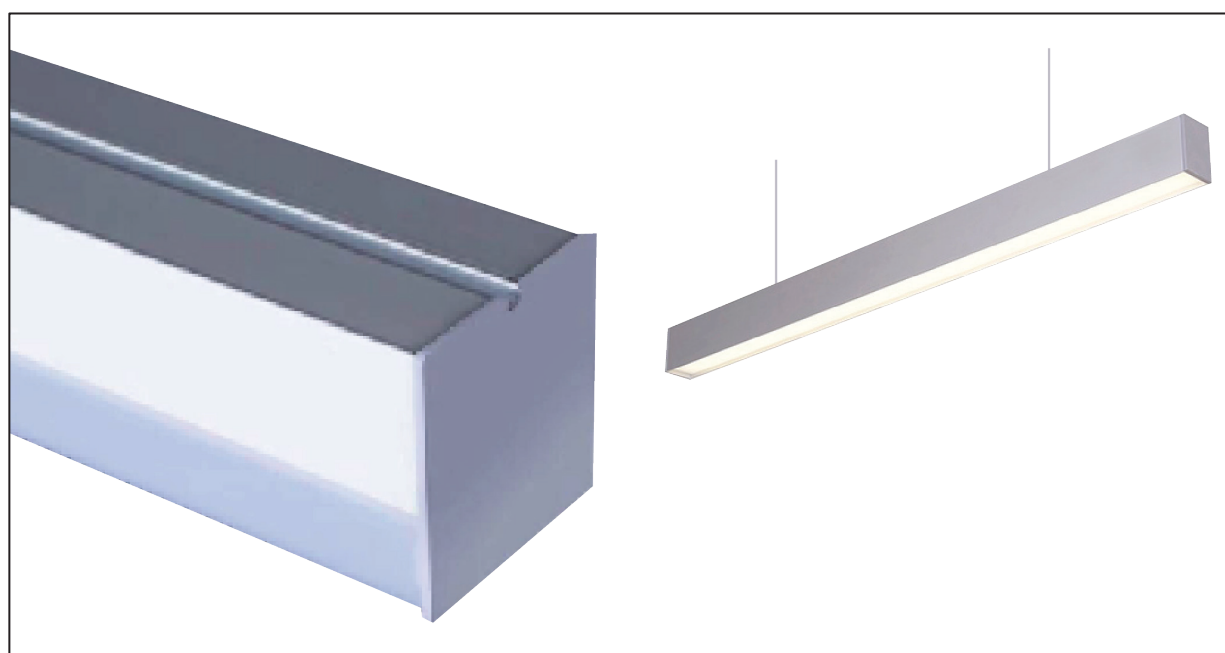

[4] LINEAR PENDANT LIGHT

POWER 54W / 100W
VOLTAGE 100-240V / 100-380V
LUMEN OUTPUT 6480Lm
CCT 3000-6000K
LENGTH 4FT / 8FT
IP RATING IP40
BEAM ANGLE 120°
FEATURE Saves personalized settings;
 Easy resetting when needed



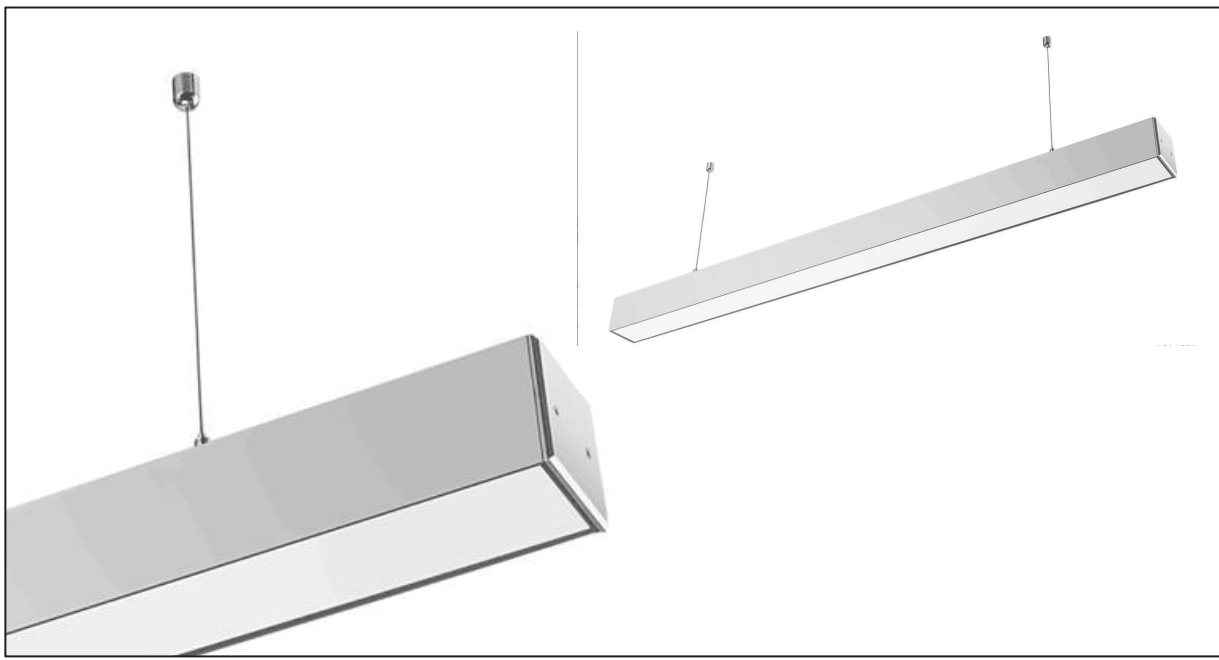


[5] TOP&BOTTOM LIT OFFICE LINEAR FIXTURE 8FT

POWER 100W
VOLTAGE 100-240V / 100-380V
LUMEN OUTPUT 6480Lm
CCT 3000-6000K
LENGTH 2FT / 4FT / 6FT / 8FT
IP RATING IP40



[6] VAPOR TIGHT SHOP LIGHT

POWER 15-60W
VOLTAGE 100-277V / 250-480V
LUMEN OUTPUT 2000-8000Lm
EFFICACY 130Lm/W / 128Lm/W
CCT 4000K / 5000K
LENGTH 2FT / 4FT / 8FT
IP RATING IP65
WARRANTY 5 years
APPLICATION Indoor, outdoor, wet locations

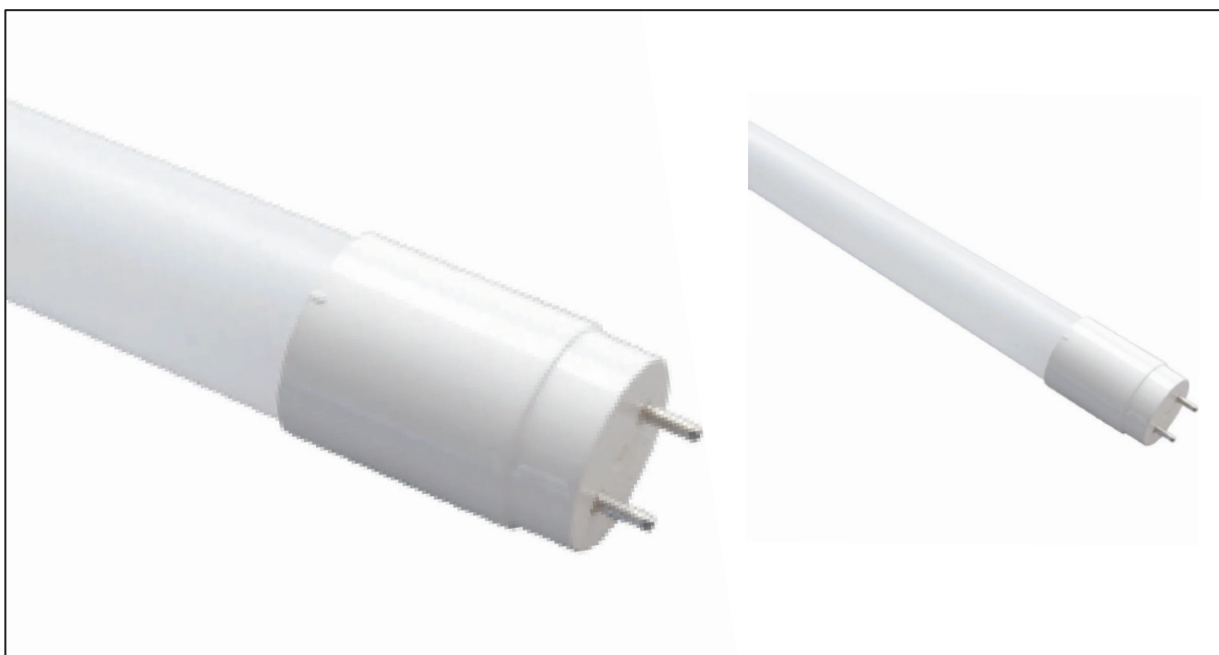

[7] 4FT T8 TUBE TYPE A+B

POWER 15W / 18W
VOLTAGE 100-265V
LUMEN OUTPUT 990-2880Lm
EFFICACY 110-160Lm/W
CCT 3000-6000K
LENGTH 4FT
FEATURE Saves up to 80% energy compared to traditional fluorescent lamps
WARRANTY 5 years



[8] 8FT T8 TUBE


POWER 36W
VOLTAGE 100-277V
LUMEN OUTPUT 3900Lm
EFFICACY 110-120Lm/W
LENGTH 8FT
MATERIAL Cover : Plastic (milky or clear colour)
Base : Aluminum
IP RATING IP20





[9] V-SHAPE INTEGRATED T8 FIXTURE

POWER 30W 36W 60W 72W
VOLTAGE 100-277V
LUMEN OUTPUT 3600-7920Lm
EFFICACY 110-120Lm/W
CCT 3000-6500K
BEAM ANGLE 270°
LENGTH 4FT 8FT
WARRANTY 5 years
FEATURE Instant on without noise

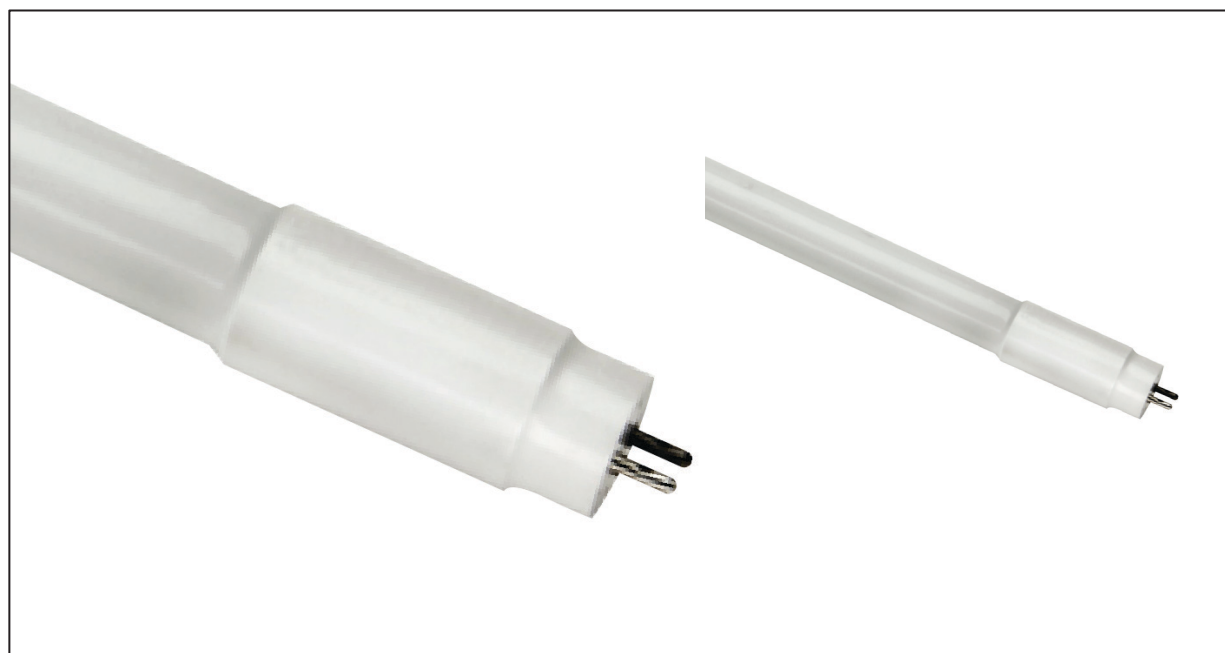

[10] 4FT T5 TUBE TYPE A

POWER 9W 15W 18W 23W
VOLTAGE 85-277V
LUMEN OUTPUT 1100-2460Lm
CCT 2700-6500K
LENGTH 225mm / 320mm / 410mm / 535mm
CERTIFICATION CCC CE FCC UL RoHS



[11] U-BENT TUBE LIGHT

POWER 15W 18W
LUMEN OUTPUT 1800Lm / 2200Lm
CCT 2700-5000K
LENGTH 6"
DIMENSION 571.5x180mm
BEAM ANGLE 240°
MATERIAL Nano PC
WEIGHT 2.5kg



[12] TRADITIONAL STYLE LED WALLPACK LIGHT

POWER 55W 100W
VOLTAGE 120V / 347V
LUMEN OUTPUT 6500-7100Lm / 11900-13000Lm
EFFICACY 118-128Lm/W / 120-130Lm/W
CCT 4000-5700K
MATERIAL Aluminum, PC
IP RATING IP65
APPLICATION Outdoor, indoor
WARRANTY 5 years





[13] GIMBAL WALLPACK LIGHT

POWER 80W
VOLTAGE 120V
LUMEN OUTPUT 9900-12000Lm
EFFICACY 125-135Lm/W
CCT 4000-5700K
BEAM ANGLE 60°
DIMENSION 232x225x132mm
HOUSING Aluminum Alloy, black/brown colour
IP RATING IP65



[14] DUST TO DAWN WALL MOUNT LIGHT

POWER 20W
VOLTAGE 120V
LUMEN OUTPUT 1800Lm/W
CCT 5000K
DIMENSION 225x145x102.2mm
CERTIFICATION DLC UL



[15] BARN LIGHT WITH PHOTOCELL

POWER 50W 70W
VOLTAGE 120-277V
LUMEN OUTPUT 6000-9100Lm
EFFICACY 130Lm/W
CCT 4000K / 5000K
BEAM ANGLE 120°
ON-OFF LEVELS 10~20Lx ON(Dusk)
30~60Lx OFF(Dawn)
DIMENSION 374x252x148.8mm / 372x250x150mm
IP RATING IP65



[16] DUAL MOTION SECURITY LIGHT

POWER 20W
VOLTAGE 120V
LUMEN OUTPUT 1300-1500Lm
CCT 3000-6000K
BEAM ANGLE 180° / 150°
IP RATING IP65
FEATURE Suitable for wet locations
Time and distance adjustable
Built-in infrared sensor for security





[17] SLIM FIT CANOPY LIGHT

POWER 160W
VOLTAGE 120V / 347V
LUMEN OUTPUT 3400-3500Lm
CCT 6500K
DIMENSION 249X249X105 mm
IP RATING IP44



[18] GAS STATION CANOPY LIGHT

POWER 100W 140W
VOLTAGE 120V / 347V
LUMEN OUTPUT 13000Lm / 14000Lm
BEAM ANGLE 120°
CCT 15000K
DIMENSION 382x382x129mm / 382x382x130mm
WEIGHT 5.2kg
IP RATING IP44 (100W)



[19] SLIM FLOOD LIGHT

POWER 20W 35W 50W 70W 100W 150W 200W
VOLTAGE 100-277V / 347V
LUMEN OUTPUT 3120-17000Lm
BEAM ANGLE 120°
CCT 2700-7500K
IP RATING IP65
HOUSING Aluminum and Glass
WARRANTY 5 years



[20] LED FLOOD LIGHT

POWER 40W 60W 100W
VOLTAGE 100-277V
LUMEN OUTPUT 4800-12000Lm
EFFICACY 120Lm/W
BEAM ANGLE 60x120°
CCT 5000K / 6500K
IP RATING IP65
MATERIAL ADC12 / PC
WEIGHT 0.85kg





[21] LED FLOOD LIGHT

POWER 200W
 VOLTAGE 220V
 LUMEN OUTPUT 30000Lm
 EFFICACY 150Lm/W
 BEAM ANGLE 80x150°
 CCT 5000K
 IP RATING IP65
 MATERIAL ADC12 / PC
 WEIGHT 4.7kg



[22] HIGH POWER MODULE FLOOD LIGHT

POWER 350W
 VOLTAGE 120V / 347V
 LUMEN OUTPUT 24000-35000Lm
 EFFICACY 80-100Lm/W
 CCT 2700-8000K
 BEAM ANGLE 140x60°
 IP RATING IP65
 HOUSING Aluminum, silver colour
 WARRANTY 5 years



[23] ARCHITECTURAL FLOOD LIGHT

POWER 30W 50W 100W 120W 150W
 VOLTAGE 120V / 347V
 LUMEN OUTPUT 3900-26000Lm
 CCT 5000K
 IP RATING IP65
 DIMENSION varies
 WARRANTY 5 years
 DIMMING 0-10V dimming



[24] TEMPORARY WORK LIGHT

POWER 60W 100W 150W
 VOLTAGE 120V / 347V
 LUMEN OUTPUT 7200-18000Lm
 EFFICACY 120Lm/W
 CCT 5000K
 BEAM ANGLE 360°
 APPLICATION Dry&damp locations including:
 New building construction / renovation site
 Warehouses, factories, exhibition halls
 Highway toll stations, gas stations






[25] SLIM SHOE BOX LIGHT

POWER 150W 200W
VOLTAGE 100-277V / 220-347V
LUMEN OUTPUT 18000-19400Lm / 26000Lm
EFFICACY 120-130Lm/W
CCT 4000-5700K
HOUSING Aluminum, black/brown colour
IP RATING IP65
APPLICATION Outdoor & indoor
WARRANTY 5 years



[26] RETROFIT KIT

POWER 45W 60W 150W
VOLTAGE 100-277V / 347V
LUMEN OUTPUT 3500-44000Lm / 3240-4545Lm
CCT 2700-8000K
IP RATING IP40
DRIVER Meanwell HLG Driver automatically drops the wattage when temperature is too high
FEATURE High lumen output with CREE XTE SMD Chip, with 150° PN junction temperature and highest performance level

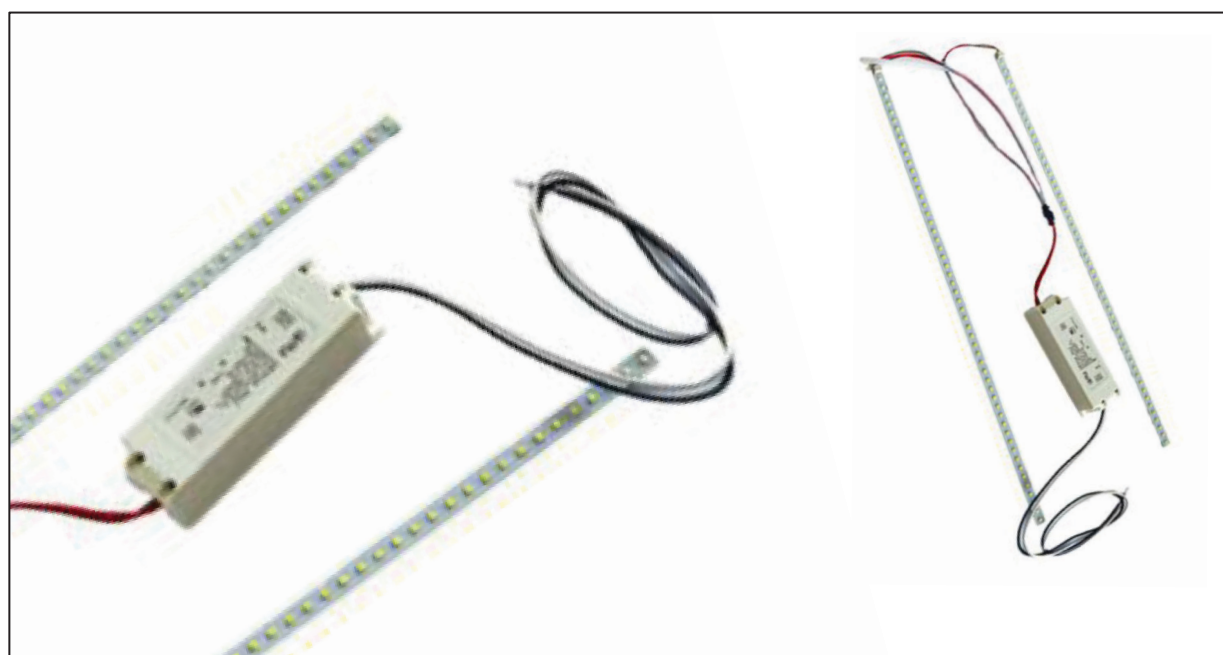

[27] TROFFER RETROFIT KIT

POWER 20-50W
VOLTAGE 100-277V
LUMEN OUTPUT 2450-6400Lm
BEAM ANGLE 140°
CCT 3000-5000K
LENGTH 4FT
INSTALLATION Mounting with magnetic LED strips and driver, quick-connect
OPTIONS Available in dimmable / frost lens options
APPLICATION Offices, lobbies, schools, airports, etc.



[28] RUNNING MAN EXIT SIGN & EMERGENCY LIGHTING

POWER 3-4W
VOLTAGE 120-347V
RECHARGE TIME 20 hours
EMERGENCY DURATION ≥2 hours
LEAD-ACID BATTERY 3.6V / 1000mAh jj
LIGHT SOURCE Ultra bright LED
HOUSING Steel
INSTALLATION Universal mounting
DIMENSION 192x310x54mm





[29] BUG EYE EMERGENCY LIGHT

POWER 5.4W
VOLTAGE 120-347V
HOUSING Thermoplastic
COLOUR White
EMERGENCY DURATION 90 minutes
DIMENSION 146.1x114.3mm
WARRANTY 2 years



[30] DUAL REMOTE HEAD EMERGENCY LIGHT

POWER 350W
VOLTAGE 120V / 347V
LUMEN OUTPUT 24000-35000Lm
EFFICACY 80-100Lm/W
CCT 2700-8000K
BEAM ANGLE 140x60°
IP RATING IP65
HOUSING Aluminum, silver colour
WARRANTY 5 years



[31] SINGLE / DUAL REMOTE HEAD EMERGENCY UNIT

POWER 5-14W
VOLTAGE 6-12V DC / 5-12V AC
MATERIAL Lens: clear PC / Reflector: Aluminum
WARRANTY 2 years
INSTALLATION Ceiling mounte / wall mount



[32] WALL SCONE LIGHT

POWER 23.8W
VOLTAGE 120V
LUMEN OUTPUT 1600Lm
CCT 3000K
FINISH Black / grey / silver
LENGTH 250mm
LIFESPAN 50000 hours





[33] COMMERCIAL PILLARS LIGHT

POWER 10W 20W
LUMEN OUTPUT 787.2Lm / 1107Lm
LENGTH 2003A-LED: 415mm / 665mm / 1015mm
 2003B-LED: 380mm / 630mm / 980mm
 2003C-LED: 395mm / 645mm / 995mm
IP RATING IP 65



[34] HALF CORN BULB

POWER 54W 115W
VOLTAGE 120V / 347V
LUMEN OUTPUT 5900Lm / 13500Lm
EFFICACY 105-110Lm/W / 108-118Lm/W
BEAM ANGLE 90x150°(TypeIII)
CCT 4000-5700K
HOUSING Magnesium alloy, AL, PC / black&silver colour
DIMENSION 113x243x80mm / 138x297x87mm
IP RATING IP51
WARRANTY 5 years



[35] CORN LIGHT

POWER 30W 40W 55W 60W 80W 100W 115W
VOLTAGE 120V / 347V
LUMEN OUTPUT 6000-6800Lm
CCT 2700-6500K
IP RATING IP64





[36] CLASSIC WALL-MOUNTED LED BARN LIGHT

POWER 42W
VOLTAGE 120V / 347V
LUMEN OUTPUT 4000Lm
CCT 5000K
DIMENSION 38x36x60cm
FEATURE Photocell (with/without)



[37] OUTDOOR POST LIGHT

POWER 60W 100W 150W
VOLTAGE 120V / 347V
LUMEN OUTPUT 7800-19500Lm
CCT 3000-5000K
DIMENSION \varnothing 360mm / \varnothing 400mm
PHOTOCELL Dusk to dawn photocell available
DIMMABLE Optional
IP RATING IP65



[38] GOOSE NECK OUTDOOR LANTERN

POWER 30W 50W 60W
VOLTAGE 120V / 347V
LUMEN OUTPUT 115Lm/W
EFFICACY 115Lm/W
CCT 3000-5000K / customize
DIMENSION \varnothing 590x318mm (lamp)
ACCESSORIES Photocell smart control system
Dimming function driver





C&C LIGHTING inc



[39] ANTIQUED GARDEN LIGHT

**FIXTURE ONLY with E26 Base



[40] TRACK LIGHT


POWER 45W
VOLTAGE 120V
LUMEN OUTPUT 3500-3700Lm
CCT 2700-5000K
DIMENSION 161x110x234mm
IP RATING IP20



[41] TRACK LIGHT - JOINER


**Joiner for Track Light



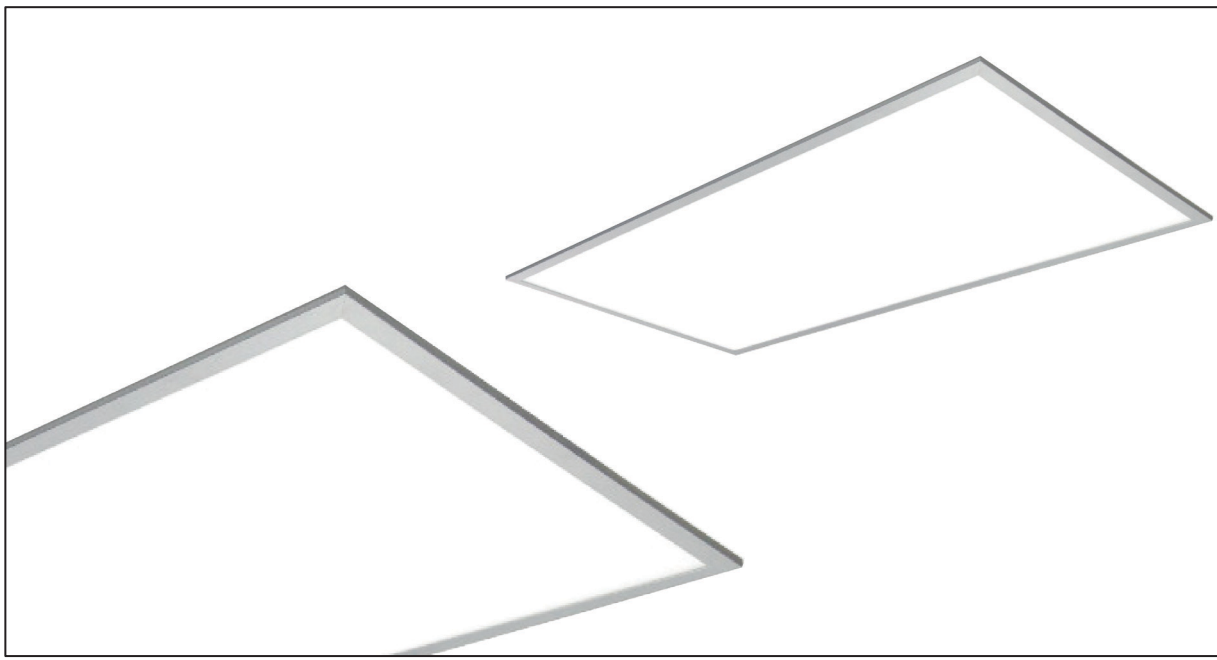

[42] ANTI-STROBE BACK LIT PANEL LIGHT

POWER 40W 60W
VOLTAGE 120-347V
LUMEN OUTPUT 4200-7500Lm
CCT 3000-5000K
DIMENSION 1x4FT / 2x2FT / 2x4FT

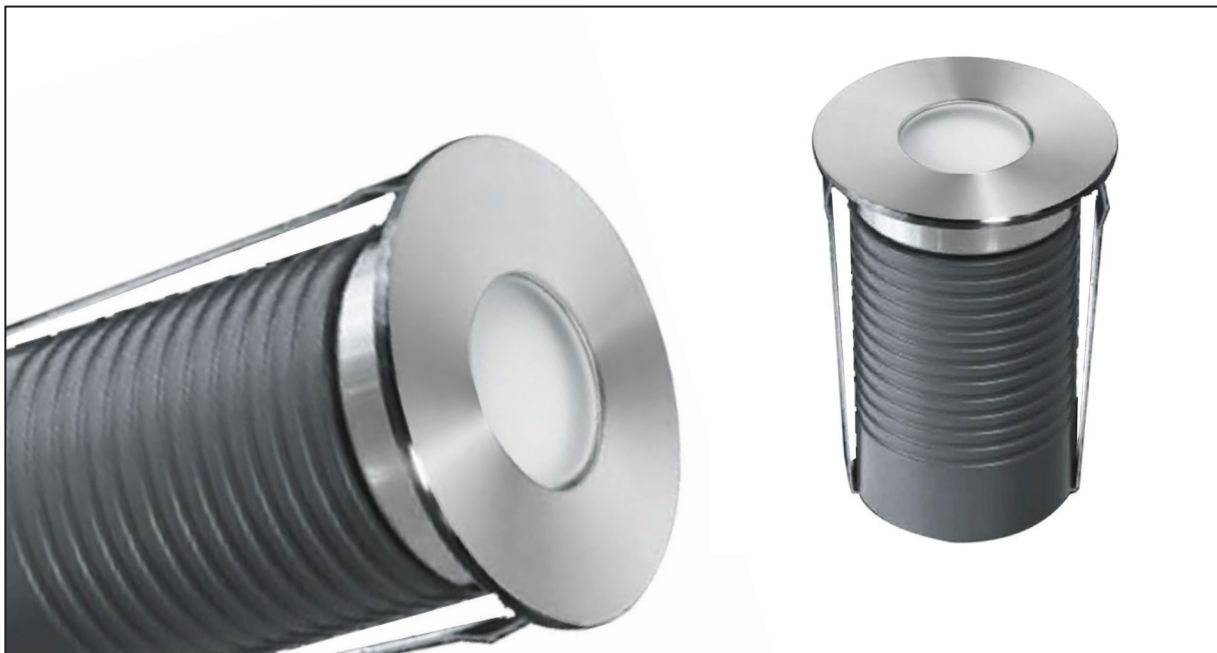

[43] INGROUND LIGHT

POWER 1W
VOLTAGE 24V / 12V
MATERIAL Aluminum Housing
CCT 3000K
HOUSING Aluminum
FIXTURE FINISH Stainless steel / silver / black
DIFFUSER Tempered glass : 4mm
DIMENSION 38x65x27mm / 34x83x50mm



[44] INGROUND LIGHT

POWER 3W
VOLTAGE 12V
LUMEN OUTPUT 150Lm
CCT 2700`-6500K
DIMENSION 16.56x3.04"





C&C LIGHTING inc



[45] INGROUND LIGHT

POWER 3W
VOLTAGE 12V
LUMEN OUTPUT 150Lm
CCT 2700-6500K
DIMENSION 16.56x3.04"



[46] INGROUND LIGHT


POWER 3W
VOLTAGE 12V
LUMEN OUTPUT 150Lm
CCT 2700-6500K
DIMENSION 16.56x3.04"



[47] STRIP LIGHT

POWER 7W/m
VOLTAGE 12V / 110V
LUMEN OUTPUT 330Lm/m
BEAM ANGLE 120°
COLOURS Red / Yellow / Blue / Green / White
LENGTH 5m
WAVE LENGTH 330Lm (white colour only)
APPLICATION Home decorations, bar lightings, KTV lightings, street luminations, sign lightings, etc.



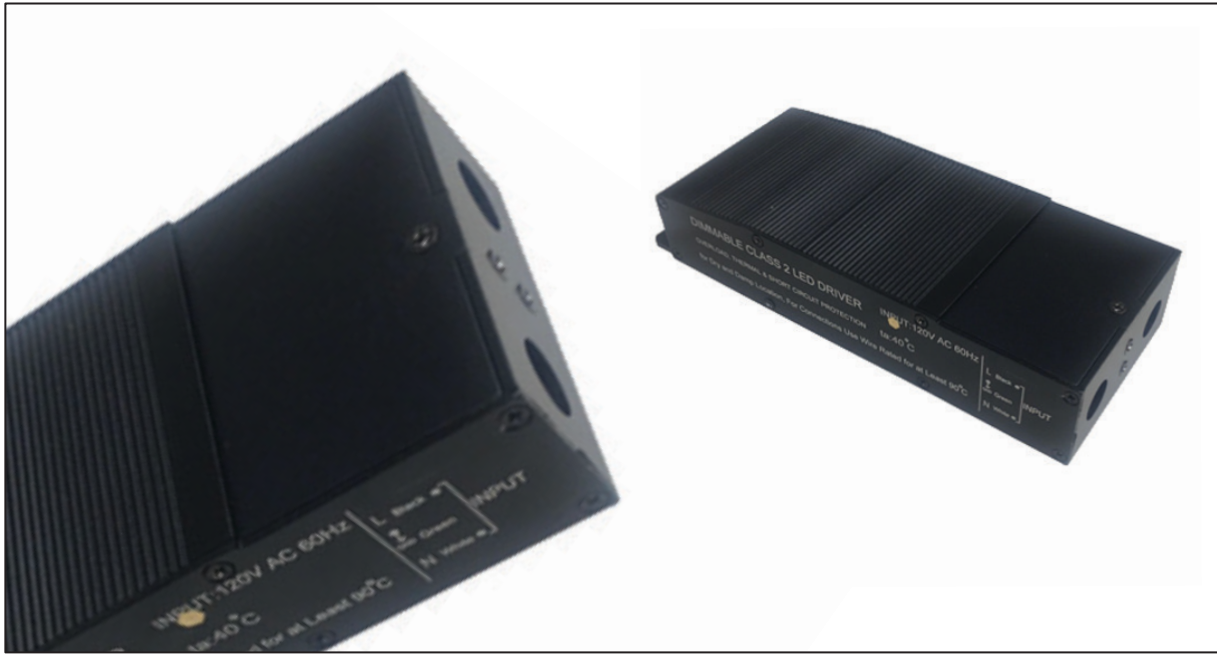

[48] DIMMABLE DRIVERS

POWER 20-86W

OPERATING TEMPERATURE -20~70°C

DIMENSION 6.93x2.75x1.38"

WEIGHT 650g



[49] RECESSED MULTI POT LIGHTS

POWER 7W x 2

VOLTAGE 120V

CCT 3000K / 4000K / 5000K

DIMENSION 350x190mm

FEATURE Recessed housing with hanger bar for easy installation

OPITONS Single, dual and triple head options



[50] FLUSH MOUNT CEILING LIGHT

POWER 17W

VOLTAGE 120V

LUMEN OUTPUT 1300Lm

CCT 3000K / 4000K / 5000Kv



[51] INTEGRATED T5

POWER 9-15W

VOLTAGE 86-277V

LUMEN OUTPUT 1100-2460Lm

CCT 3000-6000K

BEAM ANGLE 360°

LAMP SHADE Clear / milky

APPLICATION Libraries, offices, supermarkets, parking garages, factories, schools, etc.





[52] SPOT LIGHTS

POWER 6W
VOLTAGE 120V / Dimmable
LUMEN OUTPUT 500Lm
CCT 3000K / 4000K / 5000K
LIFESPAN 50,000hrs



[53] FILAMENT LIGHTS

POWER 4W / 5W
VOLTAGE 120V
LUMEN OUTPUT 380Lm
LIFESPAN 35,000hrs



[54] CAPSULE LIGHTS


POWER 1.5W / 5W
VOLTAGE 12V / Dimmable
LUMEN OUTPUT 180Lm / 420Lm
CCT 3000K / 5000K
LIFESPAN 35,000hrs



[55] RECESSED SLIM POT LIGHT

POWER 9-20W
VOLTAGE 120V / 347V
LUMEN OUTPUT 500Lm / 900Lm
EFFICACY 60Lm/W
CCT 3000K / 4000K / 5000K
BEAM ANGLE 120°
DIMENSION 4" / 6" / 8"
DIMMING 0-10V Dimmable
APPLICATION Damp locations, insulated ceilings
 Airtight



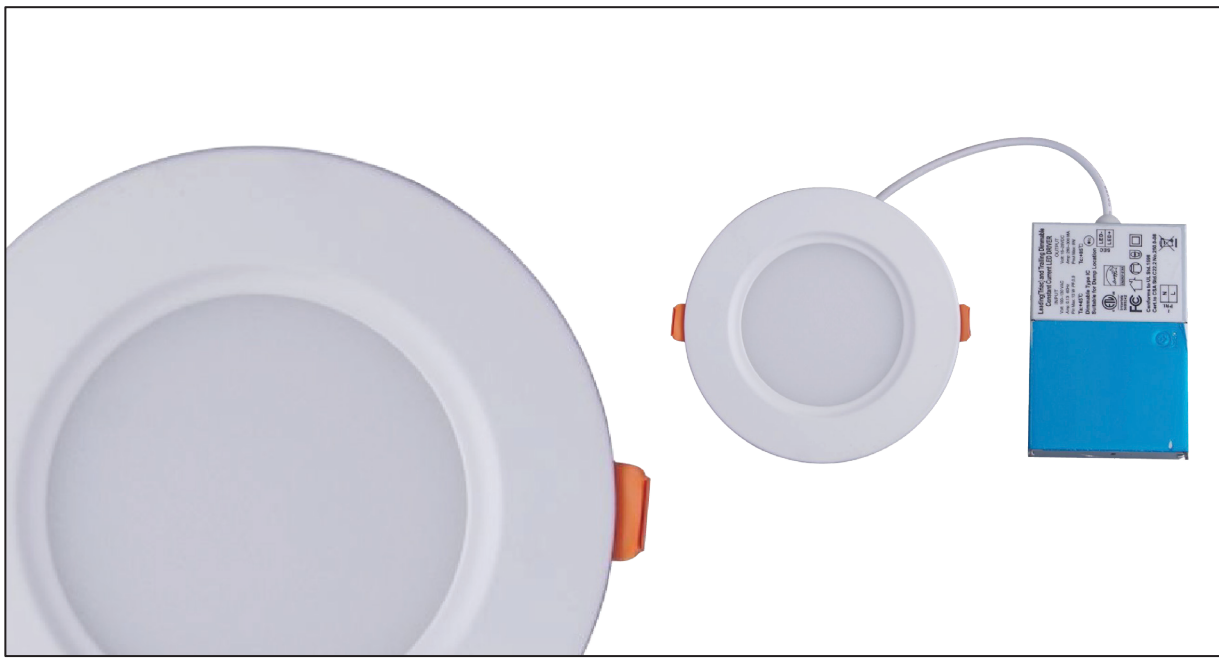

[56] COLOUR CHANGEABLE RECESSED SLIM PANEL

POWER 9-20W
VOLTAGE 120V / 347V
LUMEN OUTPUT 500Lm
BEAM ANGLE 120°
CCT 3000K & 4000K & 5000K
DIMENSION 4"
DIMMING 0-10V Dimmable
FEATURE Interchangeable between warm, neutral and cool white light colours



[57] 4" RECESSED DOWN LIGHT

POWER 10W 14W
VOLTAGE 120V
LUMEN OUTPUT 70-80Lm/W
CCT 3000K / 5000K
DIMENSION 4" / 6"



[58] GIMBAL POT LIGHT

POWER 9W
VOLTAGE 120V
LUMEN OUTPUT 875Lm
CCT 2700-5000K
BEAM ANGLE 60°
DIMMING 0-10V Dimmable
DIMENSION 3" / 4"
MATERIAL Body: aluminum
APPLICATION Commercial & residential




[59] DOUBLE RING CEILING LIGHT

POWER 25W
VOLTAGE 90-132V
LUMEN OUTPUT 1958Lm
CCT 2700-6500K
BEAM ANGLE 128°
DIMMING Dimmable
IP Rating IP44
MATERIAL Plastic, aluminum
APPLICATION Hotels, living rooms, bedrooms, etc.



SMART LED 4" SLIM PANEL LIGHTS

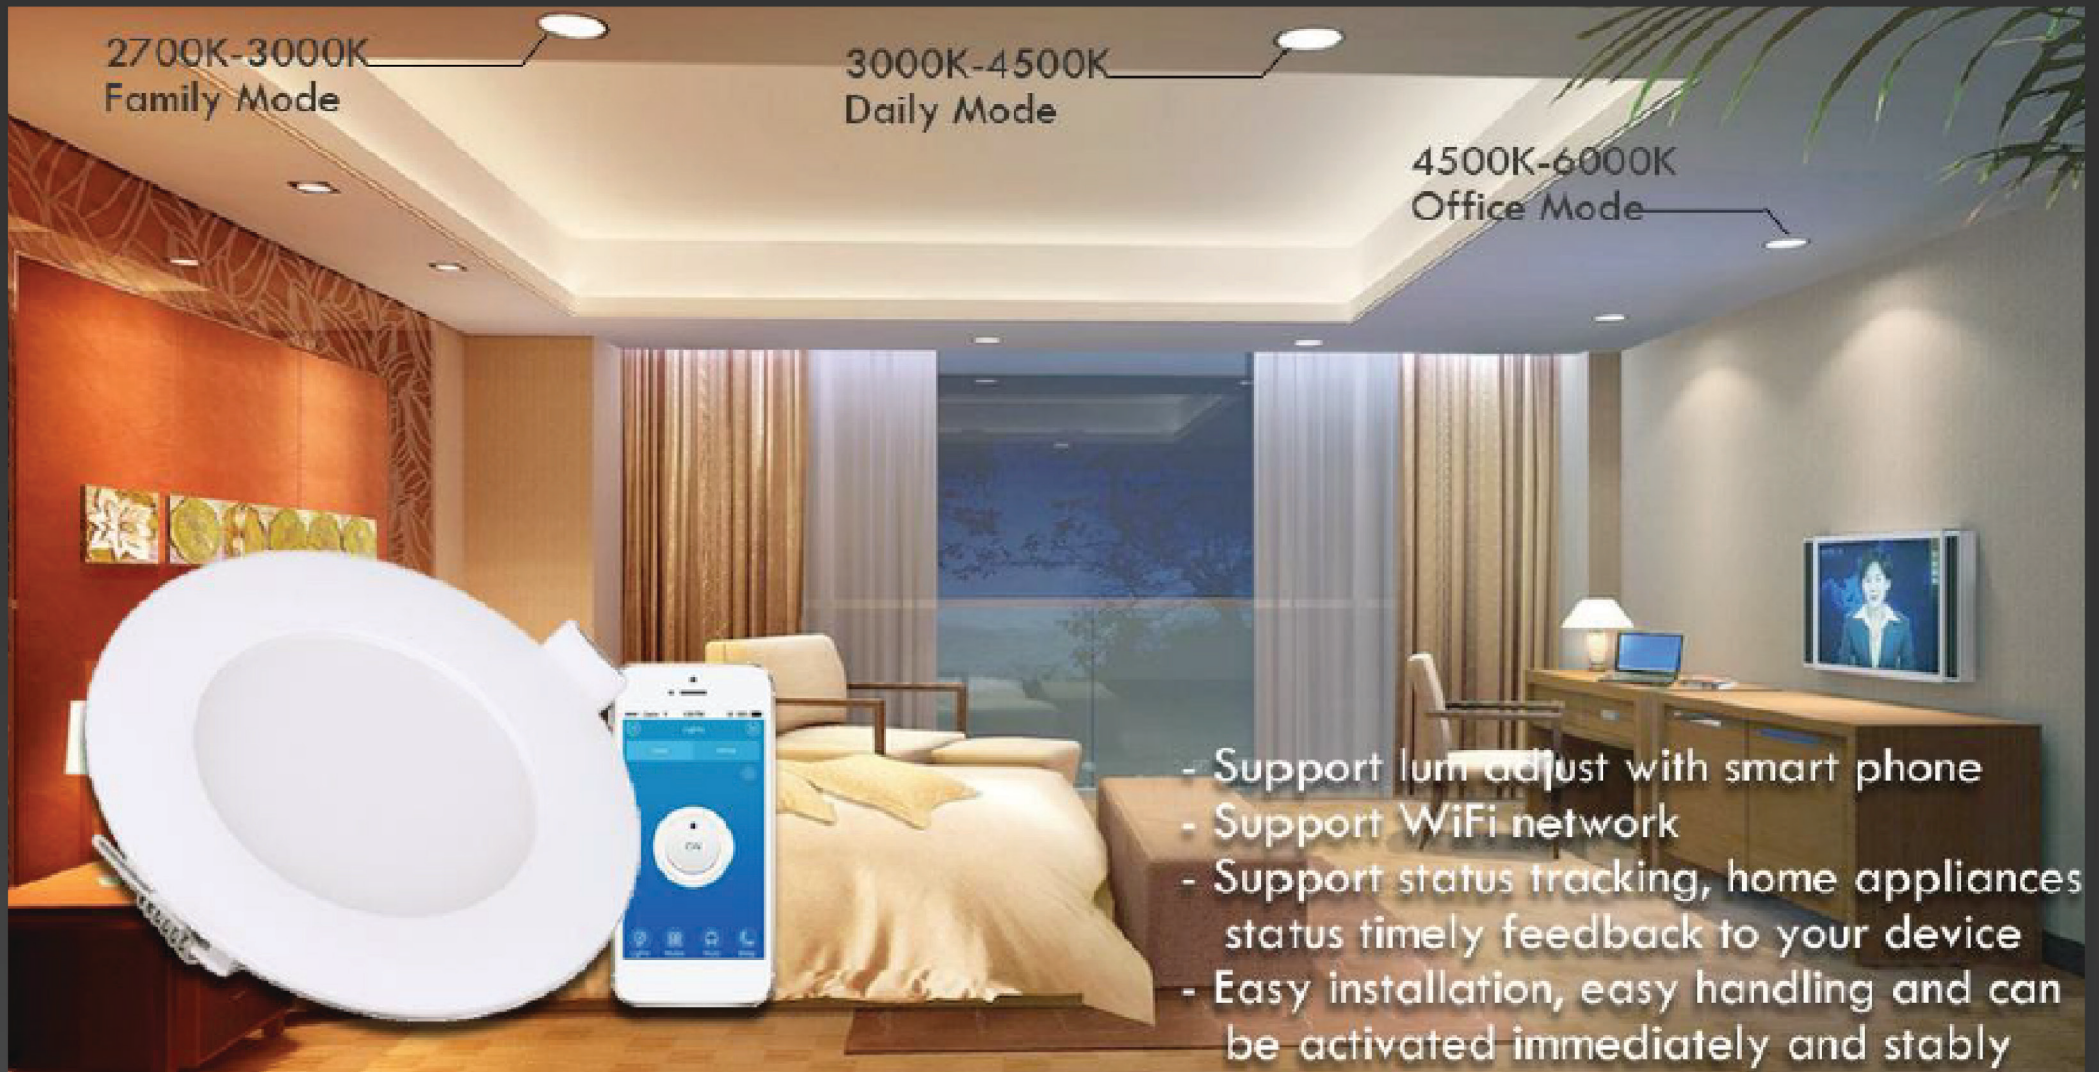

Features




Mobile Control




Wifi Connection




Timer Function




Daytime Mode



Night Mode



2700K-6000K



Dimmable



RESIDENTIAL LIGHTS

POT LIGHTS

DOWNLIGHTS

CEILING LIGHTS

CABINET LIGHTS

BULBS

STRIP LIGHTS

DRIVERS

www.ccrled.com

1 - 155 Winges Rd. Woodbridge L4L 6C7
905-856-0903

64 - 7250 Keele St. Vaughan L4K 1ZB
647-887-7403

11 - 400 Esna Park Dr. Markham L3R 3K2
905-604-6809


2 - 91 Esna Park Dr. Markham L3R 2S2
905-604-0143





C&C LIGHTING inc

Efficient, practical
and sustainable
LED lighting solutions

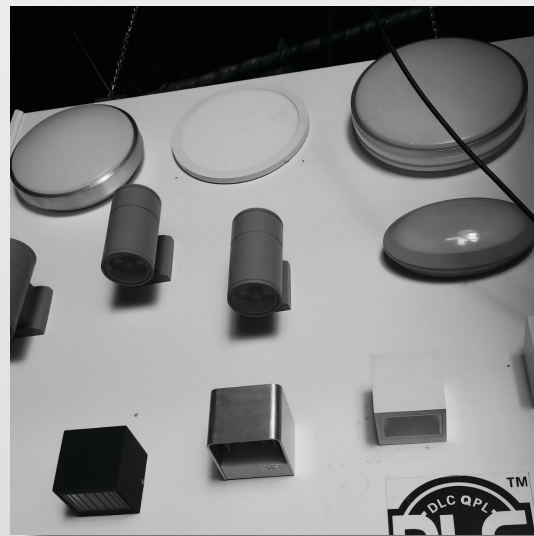

2019

**RESIDENTIAL
PRODUCT
HIGHLIGHTS**